




FINAL ENGINEERING PLANS FOR: MASTODON LAKE DREDGING CITY OF AURORA

KANE COUNTY, ILLINOIS

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR LIST OF HIGHWAY STANDARDS SEE SHEET NO. 2
FOR BENCHMARK INFORMATION, SEE SHEET NO. 2

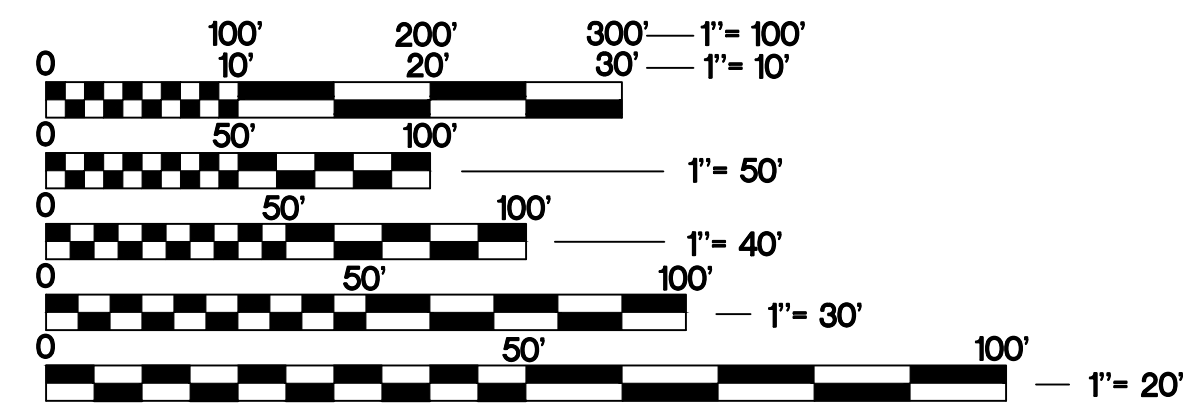

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
811 OR 1-800-892-0123

Dial 811 or 1-800-892-0123. JULIE DESIGN TICKET NUMBER: # A0330734

WITH THE FOLLOWING:
COUNTY KANE COUNTY
CITY-TOWNSHIP AURORA-AURORA TOWNSHIP
SEC. & 1/4 SEC. NO. # 26.35-38 N.-8 E.

(2) Working Days before you dig
(Excluding Sat., Sun. & Holidays)

Know what's below.
Call before you dig.

ENGINEER/SURVEYOR:


HR GREEN, INC
2363 SEQUOIA DRIVE, SUITE 101 | AURORA, IL 60506

CLIENT MANAGER: A. JAIN, P.E.
(815) 759-8331
PROJECT MANAGER: L. GILBERTSEN, P.E.
(815) 759-8370
PROJECT SURVEYOR: J. BOLINE, P.L.S.
(815) 759-8375

CONTRACT NO.
I.E.P.A. PERMIT NO. 021-EA-66294

FOR BIDDING
-NOT FOR CONSTRUCTION-

2363 SEQUOIA DRIVE, SUITE 101 | AURORA, IL 60506
Phone: 630.553.7560 | Toll Free: 800.728.7805 | Fax: 630.553.7646 | HRGreen.com

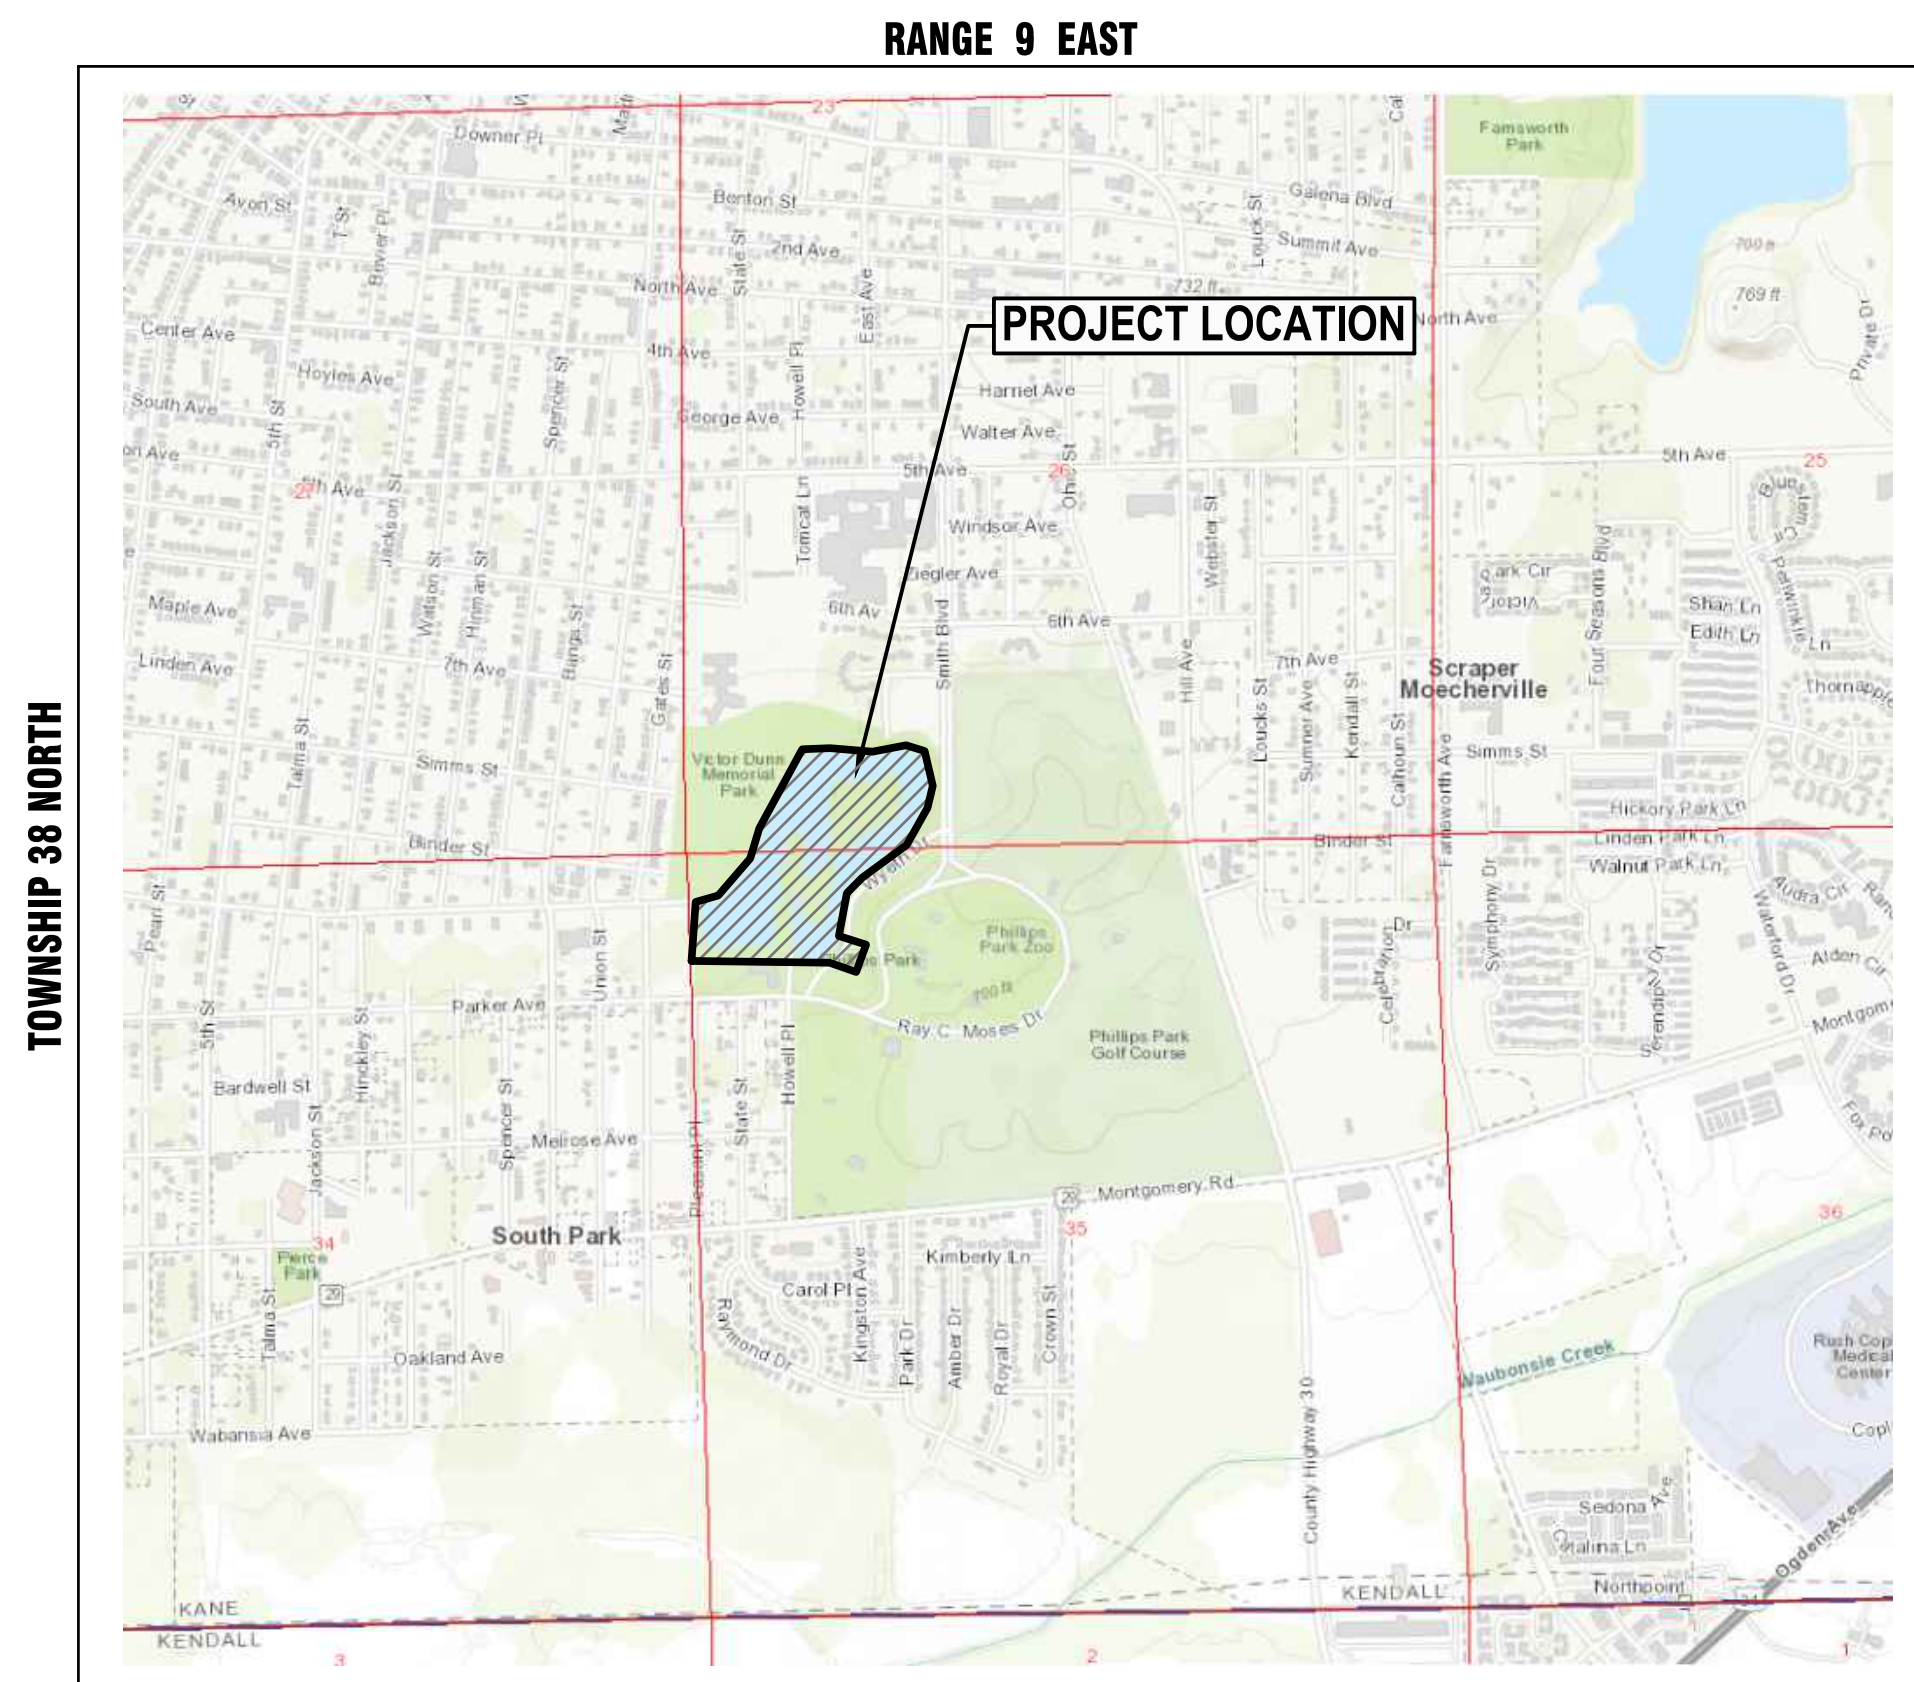

KANE COUNTY- AURORA TOWNSHIP
THIRD PRINCIPAL MERIDIAN

PROJECT LOCATION MAP
SCALE: N.T.S.



F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	ILLINOIS	KANE	32	1
CONTRACT NO.				



LOCATION OF SECTION INDICATED THUS: - [black rectangle] -

CITY OF AURORA

APPROVED _____ 20____

CITY OF AURORA

PLAN REVISIONS	
DATE	TITLE
4/7/2021	PRELIMINARY CONCEPT - SUBMITTAL TO CITY OF AURORA
7/9/2021	90% SUBMITTAL FOR REVIEW - SUBMITTAL TO CITY OF AURORA
8/20/2021	100% SUBMITTAL FOR REVIEW - SUBMITTAL TO CITY OF AURORA
4/13/2024	100% FOR BIDDING - DREDGE ONLY
1/30/2026	100% UPDATED FOR BIDDING - DREDGE ONLY

<p>I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Illinois.</p> <p style="text-align: right;">11/30/2027 DATE</p> <p>LOGAN R. GILBERTSEN, P.E. License Number: 062.067541 My license renewal date is 11/30/2025 Pages or sheets covered by this seal: DEWATERING, RESTORATION, EROSION CONTROL, GENERAL SHEETS</p>	<p>I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Illinois.</p> <p style="text-align: right;">11/30/2027 DATE</p> <p>ANDREW R. VENZKE, P.E. License Number: 062.077464 My license renewal date is 11/30/2025 Pages or sheets covered by this seal: ELECTRICAL SHEETS</p>
---	---

PLANS PREPARED FOR:

CITY OF AURORA
MR. SOUTS THAVONG, P.E., CFM
ENGINEERING COORDINATOR
CITY OF AURORA ENGINEERING DIVISION
44 EAST DOWNER PLACE
AURORA, IL 60507
PHONE: (630) 256-3207

**PROJECT LOCATED IN THE
CITY OF AURORA**

**PRINTED BY THE AUTHORITY
OF CITY AURORA**

Sheet List Table

Sheet Number	Sheet Title
01	Cover (1)
02	Index of sheets and IDOT Details (1)
03	General Notes (1)
04	Summary_of_Quantities (2)
05	Overall-Ex-Cond (1)
06	Overall-Dewatering Plan (1)
07	Overall-Ex-Lake-Bathymetrics (1)
08	Overall-Pr-Lake-Bathymetrics (2)
09	Overall Restoration Plan
10	Dewatering (1)
11	Dewatering (2)
12	Dewatering (3)
13	Dewatering (4)
14	Dewatering (5)
15	Dewatering (6)
16	Dewatering (7)
17	Dewatering (8)
18	Overall-Stockpile (1)
19	Overall-Stockpile (2)
20	Overall-Truck-Routing (1)
21	Bank Restore-Typs (3)
22	Detailed (1)
23	Erosion_Specs (1)
24	Erosion_Details (1)
25	Erosion_Details (2)
26	Erosion_Details (3)
27	Erosion_Details (4)
28	IDOT_Details (1)
29	IDOT_Details (2)
30	Electrical Symbols & Abbreviations
31	Electrical Site Plan
32	Electrical One Line Diagram and Schedule
33	Electrical Details

UTILITY CONTACTS

UTILITY: CITY OF AURORA
CONTACT: MIKE HOUSTON
PHONE: 331-254-2026
EMAIL: houstonm@aurora.il.us

UTILITY: ATT DISTRIBUTION
CONTACT: G11629@ATT.com
EMAIL: G11629@ATT.com

UTILITY: COMED
PHONE: 630-576-7094

UTILITY: COMCAST
CONTACT: MARTHA GIERAS
PHONE: 224-229-5862
EMAIL: martha_gieras@comcast.com

UTILITY: FOX METRO WATER RECLAM. DIST
CONTACT: KEITH ZOLLERS
PHONE: 630-301-6810
EMAIL: kzollers@foxmetro.org

UTILITY: NICOR GAS
CONTACT: UTILITY CONSULTANT G03W
PHONE: 630-388-2362

SYMBOL LEGEND

	EXISTING	PROPOSED
SANITARY MANHOLE	⊙	⊙
STORM MANHOLE	⊙	⊙
STORM CATCH BASIN/INLET	⊙	⊙
INLET	◁	▷
FLARED END SECTION	◁	▷
VALVE VAULT	⊗	⊗
WATER SERVICE VALVE	⊙	⊙
WATER B-BOX	⊗	⊗
INDICATES WATER MAIN LINE STOP	⊙	⊙
INDICATES PRESSURE VALVE INSERT	⊙	⊙
CUT AND CAP	⊙	⊙
FIRE HYDRANT WITH AUXILIARY VALVE	⊙	⊙
LIGHT POLE	⊙	⊙
REGULATORY SIGN	⊙	⊙
UTILITY POLE	⊙	⊙
UTILITY BOX	⊙	⊙
MAILBOX	⊙	⊙
WELL	⊙	⊙
SANITARY SEWER	—	—
STORM SEWER	—	—
COMBINATION STORM AND SANITARY SEWER	—	—
CULVERT	—	—
PERFORATED UNDERDRAIN	—	—
WATER MAIN	—	—
WATER MAIN ENCASEMENT	—	—
TRENCH BACKFILL	—	—
SANITARY FORCE MAIN	—	—
ELECTRIC LINE	—	—
OVERHEAD ELECTRIC LINE	—	—
UNDERGROUND ELECTRIC	—	—
TELEPHONE LINE	—	—
GAS LINE	—	—
CABLE TV LINE	—	—
FIBER OPTIC LINE	—	—
RAILROAD TRACKS	—	—
TREE LINE	—	—
TREE	—	—
CONTOURS	—	—
SPOT ELEVATION	—	—
FENCE	—	—
WETLAND	—	—
MARSH / WETLAND	—	—
RIPRAP	—	—
DRAINAGE DIRECTION ARROW	—	—
DRAINAGE OVERFLOW DIRECTION	—	—

STANDARD ABBREVIATIONS


B-B - BACK TO BACK OF CURB	L.E. - LANDSCAPE EASEMENT
B.C. - BACK OF CURB	M.H. - MANHOLE (TYPE SPECIFIED ON PLANS)
B.O.C. - BACK OF CURB	
B.S.L. - BUILDING SETBACK LINE	R.C.M.E. - ROAD CONSTRUCTION & MAINTENANCE EASEMENT
C.B. - STORM CATCH BASIN	
C.E. - COMMONWEALTH EDISON CO.	R.O.W. - RIGHT OF WAY
D.E. - DRAINAGE EASEMENT	T.B.F. - TRENCH BACKFILL
E-E - EDGE TO EDGE OF PAVEMENT	T.C. - TOP OF CURB
E.O.P. - EDGE OF PAVEMENT	T.C.E. - TEMPORARY CONSTRUCTION EASEMENT
E.O.S. - EDGE OF SHOULDER	
E.P. - EDGE OF PAVEMENT	T.O.B. - TOP OF BERM
E.S. - EDGE OF SHOULDER	T.O.C. - TOP OF CURB
F.E.S. - FLARED END SECTION	U.E. - UTILITY EASEMENT
I.B.T. - ILLINOIS BELL TELEPHONE CO.	

SITE BENCHMARKS:

DATUM: NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88)

SITE BENCHMARK

CITY OF AURORA BENCHMARK #16E
CITY OF AURORA SURVEY MONUMENT DISK AT THE SOUTHWEST INTERSECTION OF HILL AVENUE AND THE EAST ENTRANCE TO PHILLIPS PARK GOLF COURSE. LYING 6.9' SOUTHWEST OF NORTHWEST POST CORNER OF THE PHILLIPS PARK GOLF COURSE SIGN AND 13.7' NORTHWEST OF THE SOUTHWEST POST CORNER OF THE PHILLIPS PARK GOLF COURSE SIGN.
ELEVATION=718.48 (NAVD88)

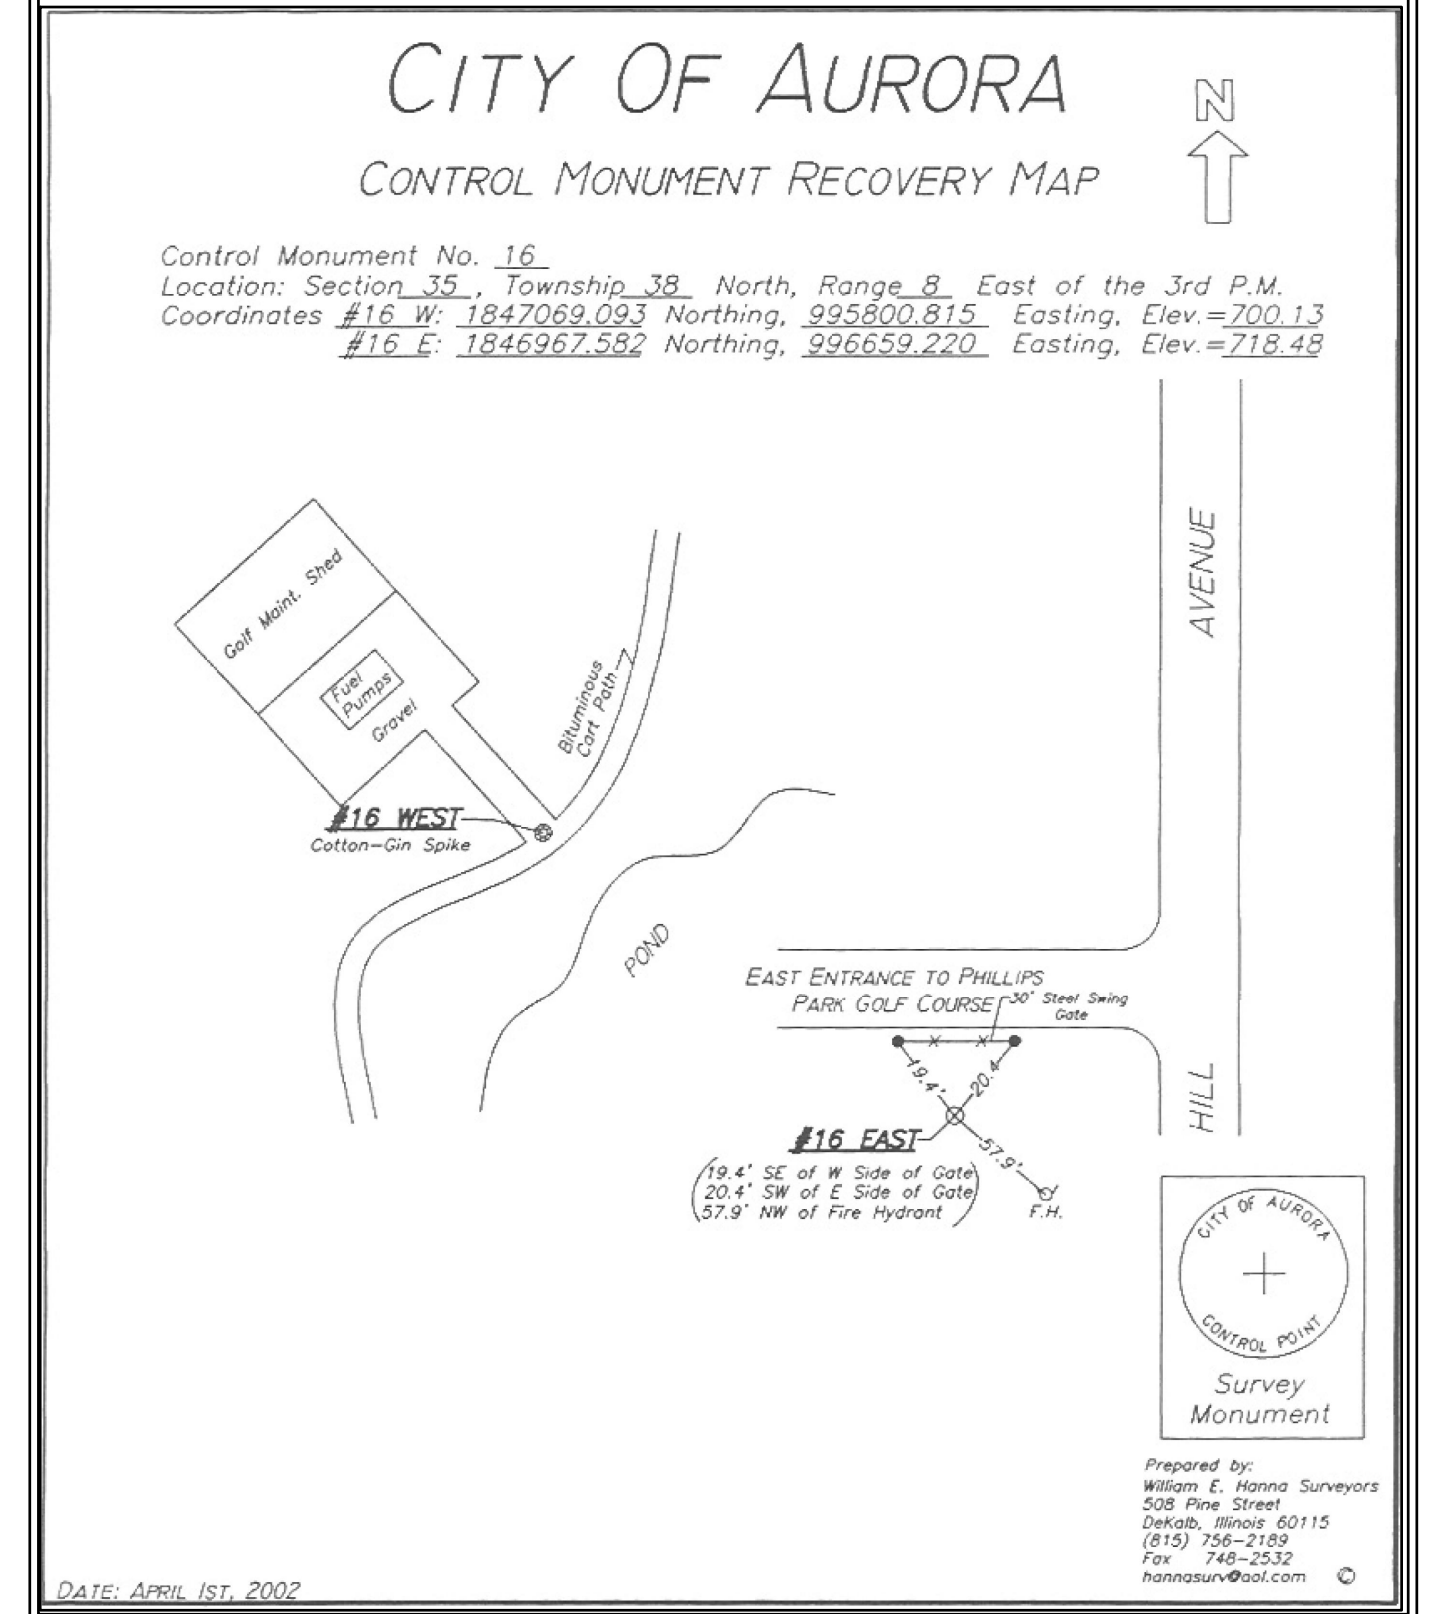

COMPANY NAME: HRGreen.com
PROJECT CONTACT: HRGreen.com
DATE PLOTTED: 2/6/2026 3:18 PM
FILE NAME: 191806-Cover
PLOT DRIVER: DWG To PDF.pc3
PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Cover	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

INDEX OF SHEETS, BENCHMARKS AND UTILITY CONTACTS

SCALE: N.T.S. SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	02
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

GENERAL NOTES:

1. All items of this project shall be governed by specifications included in the documents listed below:
 - A. "Standard Specifications for Road and Bridge Construction" prepared by the Department of Transportation of the State of Illinois and adopted by said department (Latest Edition).
 - B. Supplemental Specifications and Recurring Special Provisions" adopted by the Illinois Department of Transportation (Latest Edition).
 - C. "Bureau of Design & Environment Manual" (BDE) by Illinois Department of Transportation (Latest Edition)
 - D. "Manual on Uniform Traffic Control Devices" – Federal Highway Administration MUTCD (Latest Edition).
 - E. "Illinois Supplement to the National Manual on Uniform Traffic Control Devices" (Latest Edition).
 - F. "Standard Specifications for Water and Sewer Main Construction in Illinois" (Latest Edition).
 - G. "Illinois Urban Manual" prepared by the U.S. Department of Agriculture NRCS and maintained by the Association of Illinois Soil and Water Conservation Districts (Latest Edition).
 - H. "Standards and Specifications for Soil Erosion and Sediment Control" by IEPA, Illinois Urban Manual – A Technical Manual Designed For Urban Ecosystem Protection and Enhancement, (Latest Edition).
 - I. "Kane County Stormwater Management Ordinance"

In addition the following special provisions supplement the said specifications, and in case of conflict with any part or parts of said specifications, these special provisions shall take precedence and shall govern.

2. SCOPE OF WORK: The proposed improvement consists of supplying all the necessary labor, material and equipment to satisfactorily construct and install all improvements according to the plans designated as MASTODON LAKE DREDGING PROJECT – AURORA,IL.

3. COORDINATION WITH UTILITIES

Prior to the start of construction, the contractor shall have all utilities located by J.U.L.I.E (811) or (1-800-892-0123) at least 48 hours prior to the start of construction. The contractor shall cooperate with all utility owners as provided for in the Standard Specifications.

The contractor shall be responsible for the protection of all underground or surface utilities, even though they may not be shown on the plans. Any utility that is damaged during construction shall be repaired or replaced to the satisfaction of the Engineer or the Owner. This work shall be paid for at the Contractor's expense.

It is the Contractor's responsibility to locate all existing utilities prior to construction. The location of existing utilities as shown on these plans is based on record information and may not be accurate. Where conflict exists between existing utilities and the proposed underground piping requiring a revision to the plans, such construction shall not be undertaken until such changes are approved by the Engineer. The contractor shall report all such conflicts immediately to the Engineer.

The coordination of all utility work for the construction project will be discussed at a pre construction meeting.

4. CLEARING, TREE REMOVAL, BUSH REMOVAL, AND PROTECTION

The Contractor shall provide protection as per Article 201 of the Standard Specifications.

5. CONSTRUCTION FENCING

- A. Perimeter Construction Fencing to be placed to ensure the safety of property and life. Fencing of areas for contractors stockpile, staging, security and safety shall not be measured for payment. Construction fencing shall be adjusted at the Owner's direction when it interferes with the Owner's operations.

6. CONSTRUCTION OBSERVATION

All improvements shall be subject to observation by a duly authorized and qualified City of Aurora or owner's representative both during the course of construction and after construction is complete for final project closeout.

7. EROSION CONTROL. It shall be the Contractor's responsibility to properly control erosion on the jobsite. Any siltation of conduits, structures, or ditches shall be cleaned and maintained by the Contractor until the seeding has taken hold. All washouts, gullies, etc. will be regraded and reseeded by the Contractor. Site grading shall not proceed until erosion control measures have been installed.

The Contractor's responsibility for erosion control shall extend throughout the construction process. The Contractor shall be responsible for clean-up of paved surfaces within and adjacent to the project on a timely basis and/or at the direction of the Engineer, or City of Aurora.

All construction will adhere to the requirements set forth in the IEPA's General NPDES Permit for Stormwater Discharge from construction site activities.

For all drainage structures in the disturbed areas, inlet protection shall be placed and maintained by the Contractor until vegetation is established, as determined by the City of Aurora.

Erosion control measures must be inspected weekly and after every storm of one half inch of rainfall or greater by the Contractor. An inspection report must be submitted by the Contractor to the City of Aurora following each inspection. Any repairs or replacement needed to ensure adequate erosion control must be made immediately at the Contractor's expense.

Construction & Silt fencing must be installed prior to starting construction.

8. TOPSOIL PLACEMENT. Contractor shall place stockpiled topsoil or imported material on all disturbed areas with a minimum 6" topsoil raked smooth to be ready for landscaping (seeding, sod, etc.).

9. No construction plans shall be used for construction unless specifically marked "For Construction." Prior to commencement of construction, the Contractor shall verify all dimensions and conditions affecting their work with the actual conditions at the job site. If there are any discrepancies from what is shown on the construction plans, he must immediately report same to the Engineer before doing any work, otherwise the Contractor assumes full responsibility. In the event of disagreement between the construction plans, standard specifications and/or special details, the Contractor shall secure written instructions from the Engineer prior to proceeding with any part of the work affected by omissions or discrepancies. Failing to secure such instructions, the Contractor will be considered to have proceeded at his own risk and expense. In the event of any doubt or question arising with respect to the true meaning of the construction plans or specifications, the decision of the Engineer shall be final and conclusive.

10. INDEMNIFICATION

Contractor shall provide indemnification as per Article 107.26 of the Standard Specifications. All costs for insurance shall be considered incidental to the contract.

ADDITIONAL REQUIREMENTS: The Contractor shall also indemnify and hold harmless, HR Green, Inc., the Consultant selected for Construction Engineering Services (HR Green, Inc.), City of Aurora, its officers, employees, agents, and subcontractors. The Contractor shall not commence work until additional indemnification requirements have been obtained under this paragraph.

11. INSURANCE AND LIABILITY

Contractor shall provide insurance coverage as per Article 107.27 of the Standard Specifications. All costs for insurance shall be considered incidental to the contract.

The "District" shall be taken to mean City of Aurora. The policy of insurance shall include HR Green, Inc., the Consultant selected for Construction Engineering Services (HR Green, Inc.), City of Aurora, and its agents as an additional insured or provide separate coverage with an Owner's Protective Policy, as per the amounts stated in the Standard Specifications. No work shall begin until the certificate of insurance is on file with the Engineer.

ADDITIONAL REQUIREMENTS: The Contractor shall secure and maintain such insurance from an insurance company authorized to write casualty insurance in the State where the work is located and also will protect and list as additional insured, HR Green, Inc., the Consultant selected for Construction Engineering Services (yet to be determined), City of Aurora, and his subcontractors and his employees from claims for bodily injury, death or property damage which may arise from improvements on the property. The Contractor shall not commence work until he/she has obtained all insurance required under this paragraph and filed the certificate of insurance or the certified copy of the insurance policy.

12. SITE CLEAN UP

When construction operations take place adjacent to public roadways the contractor shall be responsible for removal of all loose debris deposited on the pavement. The stock piling of spoils from foundations or utility excavations will not be allowed on the pavement or in special management areas such as floodplains or wetlands.

13. LANDSCAPING & RESTORATION

The contractor shall take care in grading near trees, shrubs and bushes which are not to be removed so as not to cause injury to the roots, trunks or limbs. This work shall be included and paid for as "Tree Protection." Saw cutting of tree roots shall be considered incidental to the contract.

The contractor shall make every effort to avoid disturbing any existing landscaping, landscaping appurtenances, walkways, retaining walls, etc, that are not marked for removal on the plans. If damage occurs, the contractor shall replace, in kind, the item or items at his/her expense in a manner meeting with the approval of the Engineer. All vegetation being removed shall be replaced with the same size and type. No additional compensation will be allowed for damaged items.

14. STAKING

The contractor shall be responsible for establishing construction staking for the project site which will be paid for as a lump sum item, CONSTRUCTION STAKING LAYOUT. The Contractor shall protect and carefully preserve all section or subsection monuments or property or reference markers until the Owner, his agent or an authorized surveyor has witnessed or otherwise referenced their locations

The Engineer shall be responsible for providing electronic files to help facilitate the contractor's construction staking.

All elevations are on U.S.G.S. Datum. (NAVD 88)

15. MISCELLANEOUS

All work performed relative to this improvement shall comply with all applicable rules and regulations of O.S.H.A.

All construction personnel will be required to wear a safety vest, complying with the latest O.S.H.A. requirements, at all times while at the construction site. Compliance with this requirement shall be considered as incidental to the contract.

Unless otherwise indicated, the cost of all materials required and all labor necessary to comply with the above provisions will not be paid for separately, but shall be considered as included in the unit bid prices of the contract, and no additional compensation will be allowed.

The Contractor shall be responsible for the installation and maintenance of adequate signs, traffic control devices, and warning devices to inform and protect the public during all phases of construction. See Special Provisions. This work be measured and paid for as Traffic Control and Protection, (Special), Unless Noted Otherwise

Part of the proposed project is located within a flood hazard area, wetlands and Waters of the United States.

The contractor shall confine their grading operations to within construction limits and easements shown on the plans. Any damage to properties outside the site boundary shall be at the sole responsibility of the contractor.

The contractor shall apply necessary moisture control to the construction area and haul roads to prevent the spread of dust.

All field ties encountered shall be replaced and/or connected to the storm sewer system and located and identified on the record plans by the contractor.

All storm drainage construction shall be performed in accordance with the City of Aurora.

Elevations and contours are to state plane coordinates per NAVD 88 datum.

1 week prior to construction within City row or any connection to public sewers, contractor shall notify the appropriate City engineering divisions (see contact information on cover sheet of this plan set).

The contractor shall not disturb desirable grass areas and desirable trees outside the construction limits. The contractor shall not be permitted to park or service vehicles and equipment or store materials in areas outside of the optional staging area shown in plan. Requests for additional storage, parking and service areas will be subject to the approval of the owner.

The contractor is responsible for replacing any areas of pavement or sidewalk not to be removed that is damaged due to operating equipment on the pavement or sidewalk.

The contractor may be required to place temporary warning devices and safety fence at certain locations where replacement features are not installed the same day, as directed by the engineer or the Owner.

All construction within public row/easements and/or any connection to public sewers and streets, shall comply with the City construction specifications for subdivisions and latest edition of IDOT design standards

The Kane-DuPage Soil and Water Conservation District (KDSWCD) must be notified one week prior to pre-construction conference, one week prior to the commencement of land-disturbing activities, and one week prior to the final inspection.

Prior to commencing land-disturbing activities in areas other than indicated on these plans (including but not limited to, additional phases of development and off-site borrow or waste areas) a supplementary erosion control plan shall be submitted to the owner for review by the KDSWCD.

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: Illinois Professional Design Firm
 DATE PLOTTED: 2/6/2026 3:18 PM
 CLIENT: 191806-Cover
 FILE NAME: 191806-Cover
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED – LRG	REVISED –
FILE NAME = 191806-Cover	DRAWN – MPL/RMY	REVISED –
PLOT SCALE = N.T.S.	CHECKED – LRG	REVISED –
PLOT DATE = 2/6/2026	DATE –	REVISED –

**CITY OF AURORA
MASTODON LAKE DREDGING PROJECT**

GENERAL NOTES

SCALE: N.T.S. SHEET NO. 01 OF 03 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	03
CONTRACT NO.				
		ILLINOIS	FED. AID PROJECT	

SCHEDULE OF PRICES			
	CODED PAY ITEMS BASE BID	UNITS	QTY
1	CONSTRUCTION LAYOUT	L SUM	1
2	MOBILIZATION	L SUM	1
3	HYDRAULIC DREDGING & DEWATERING	CU YD	50,000
4	MECHANICAL DREDGING	CU YD	1,000
5	EARTH EXCAVATION SPECIAL - HAULING	CU YD	10,000
6	NON-SPECIAL WASTE DISPOSAL	CU YD	500
7	EARTHWORK - GRADING AND SHAPING	CY	30,000
8	DEWATERING SITE PREPARATION	L SUM	1
9	PERIMETER EROSION BARRIER	FOOT	9,863
10	TURBIDITY CURTAIN	FOOT	220
11	TEMPORARY DITCH CHECKS	FOOT	200
12	MULCH, METHOD 2	ACRE	1.17
13	TEMPORARY EROSION CONTROL SEEDING	POUND	117
14	INLET AND PIPE PROTECTION	EACH	20
15	TEMPORARY CHAIN LINK FENCE - SECURITY FENCE	FOOT	8,943
16	PIPE CULVERTS, CLASS A, TYPE 1 RCP 24"	FOOT	50
17	TEMPORARY CONSTRUCTION ENTRANCE	EACH	7.00
18	PRECAST BLOCK REVETMENT MAT	SQ YD	206
19	SEEDING - AURORA MIX	ACRE	6.35
20	SEEDING - CLASS 4A	ACRE	3.04
21	EROSION CONTROL BLANKET, S75-BN	SQ YD	31,277
22	MULCH, METHOD 3	ACRE	5.40
23	AERATION FOUNTAIN (COMPLETE)	EACH	5
24	AERATION DIRECTIONAL MIXER (COMPLETE)	EACH	2
25	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1
26	SUPPLEMENTAL WATERING	MONTH	3
27	TRENCH BACKFILL	CU YD	20
28	CLASS D PATCHES, TYPE III, 4 INCH	SQ YD	334
29	ELECTRICAL	L SUM	1
30	ITEMS ORDERED BY ENGINEER	EACH	200,000
31	AERATION FOUNTAIN LIGHTING	EACH	3

*** THE TOTAL VOLUME OF DREDGED MATERIAL IS 50,000CY CUMULATIVE. THE CITY SHALL PROVIDE THE FINAL DIRECTION ON THE ALLOWABLE LOCATIONS FOR DEWATERING PRACTICES.

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:18 PM
 FILE NAME: 191806-Cover
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Cover	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

SUMMARY OF QUANTITIES


SCALE: N.T.S. SHEET NO. 02 OF 03 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	04
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

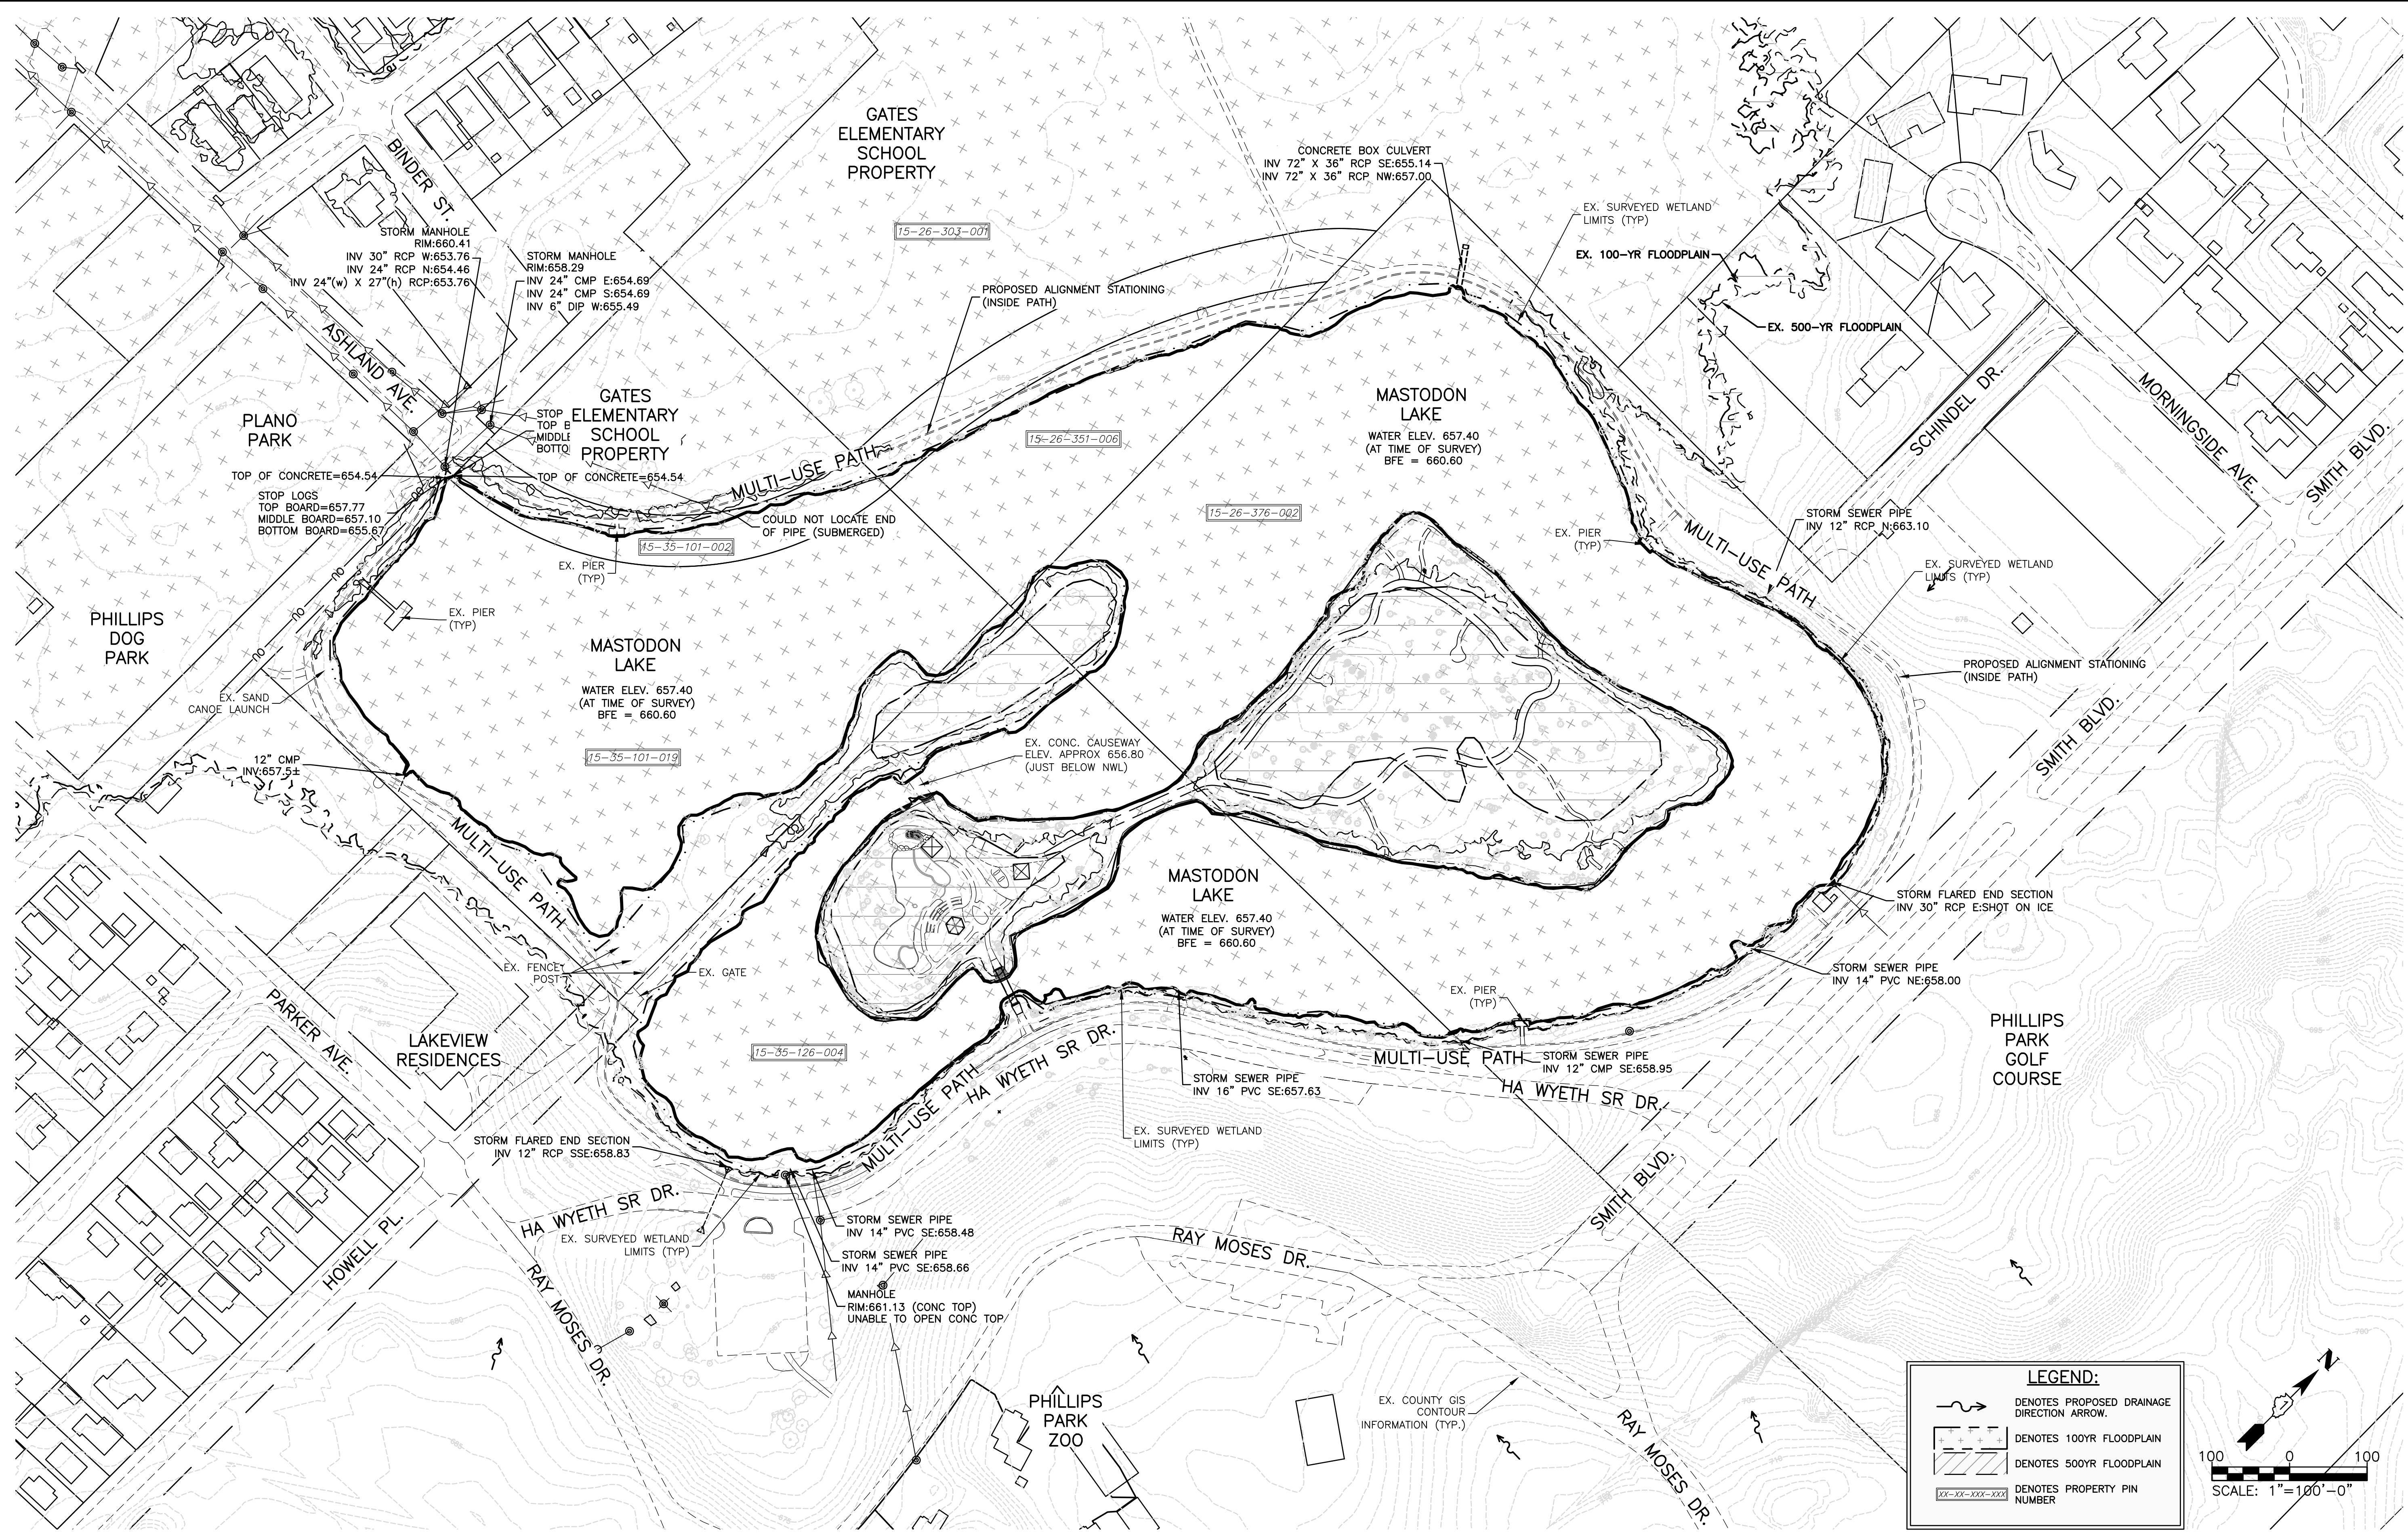

LEGEND:

- DENOTES PROPOSED DRAINAGE DIRECTION ARROW.
- DENOTES 100YR FLOODPLAIN
- DENOTES 500YR FLOODPLAIN
- DENOTES PROPERTY PIN NUMBER

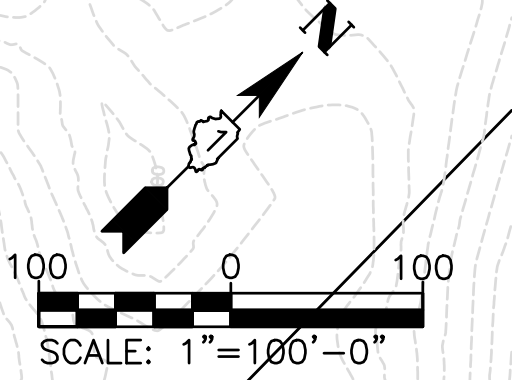

COMPANY NAME: HRGreen
 PROJECT CONTACT: Robert Yerushalmi
 DATE PLOTTED: 2/6/2026 3:19 PM
 FILE NAME: 191806-Overall-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Overall-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=100'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT


OVERALL EXISTING CONDITIONS PLAN
 SCALE: 1"=100' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	05
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

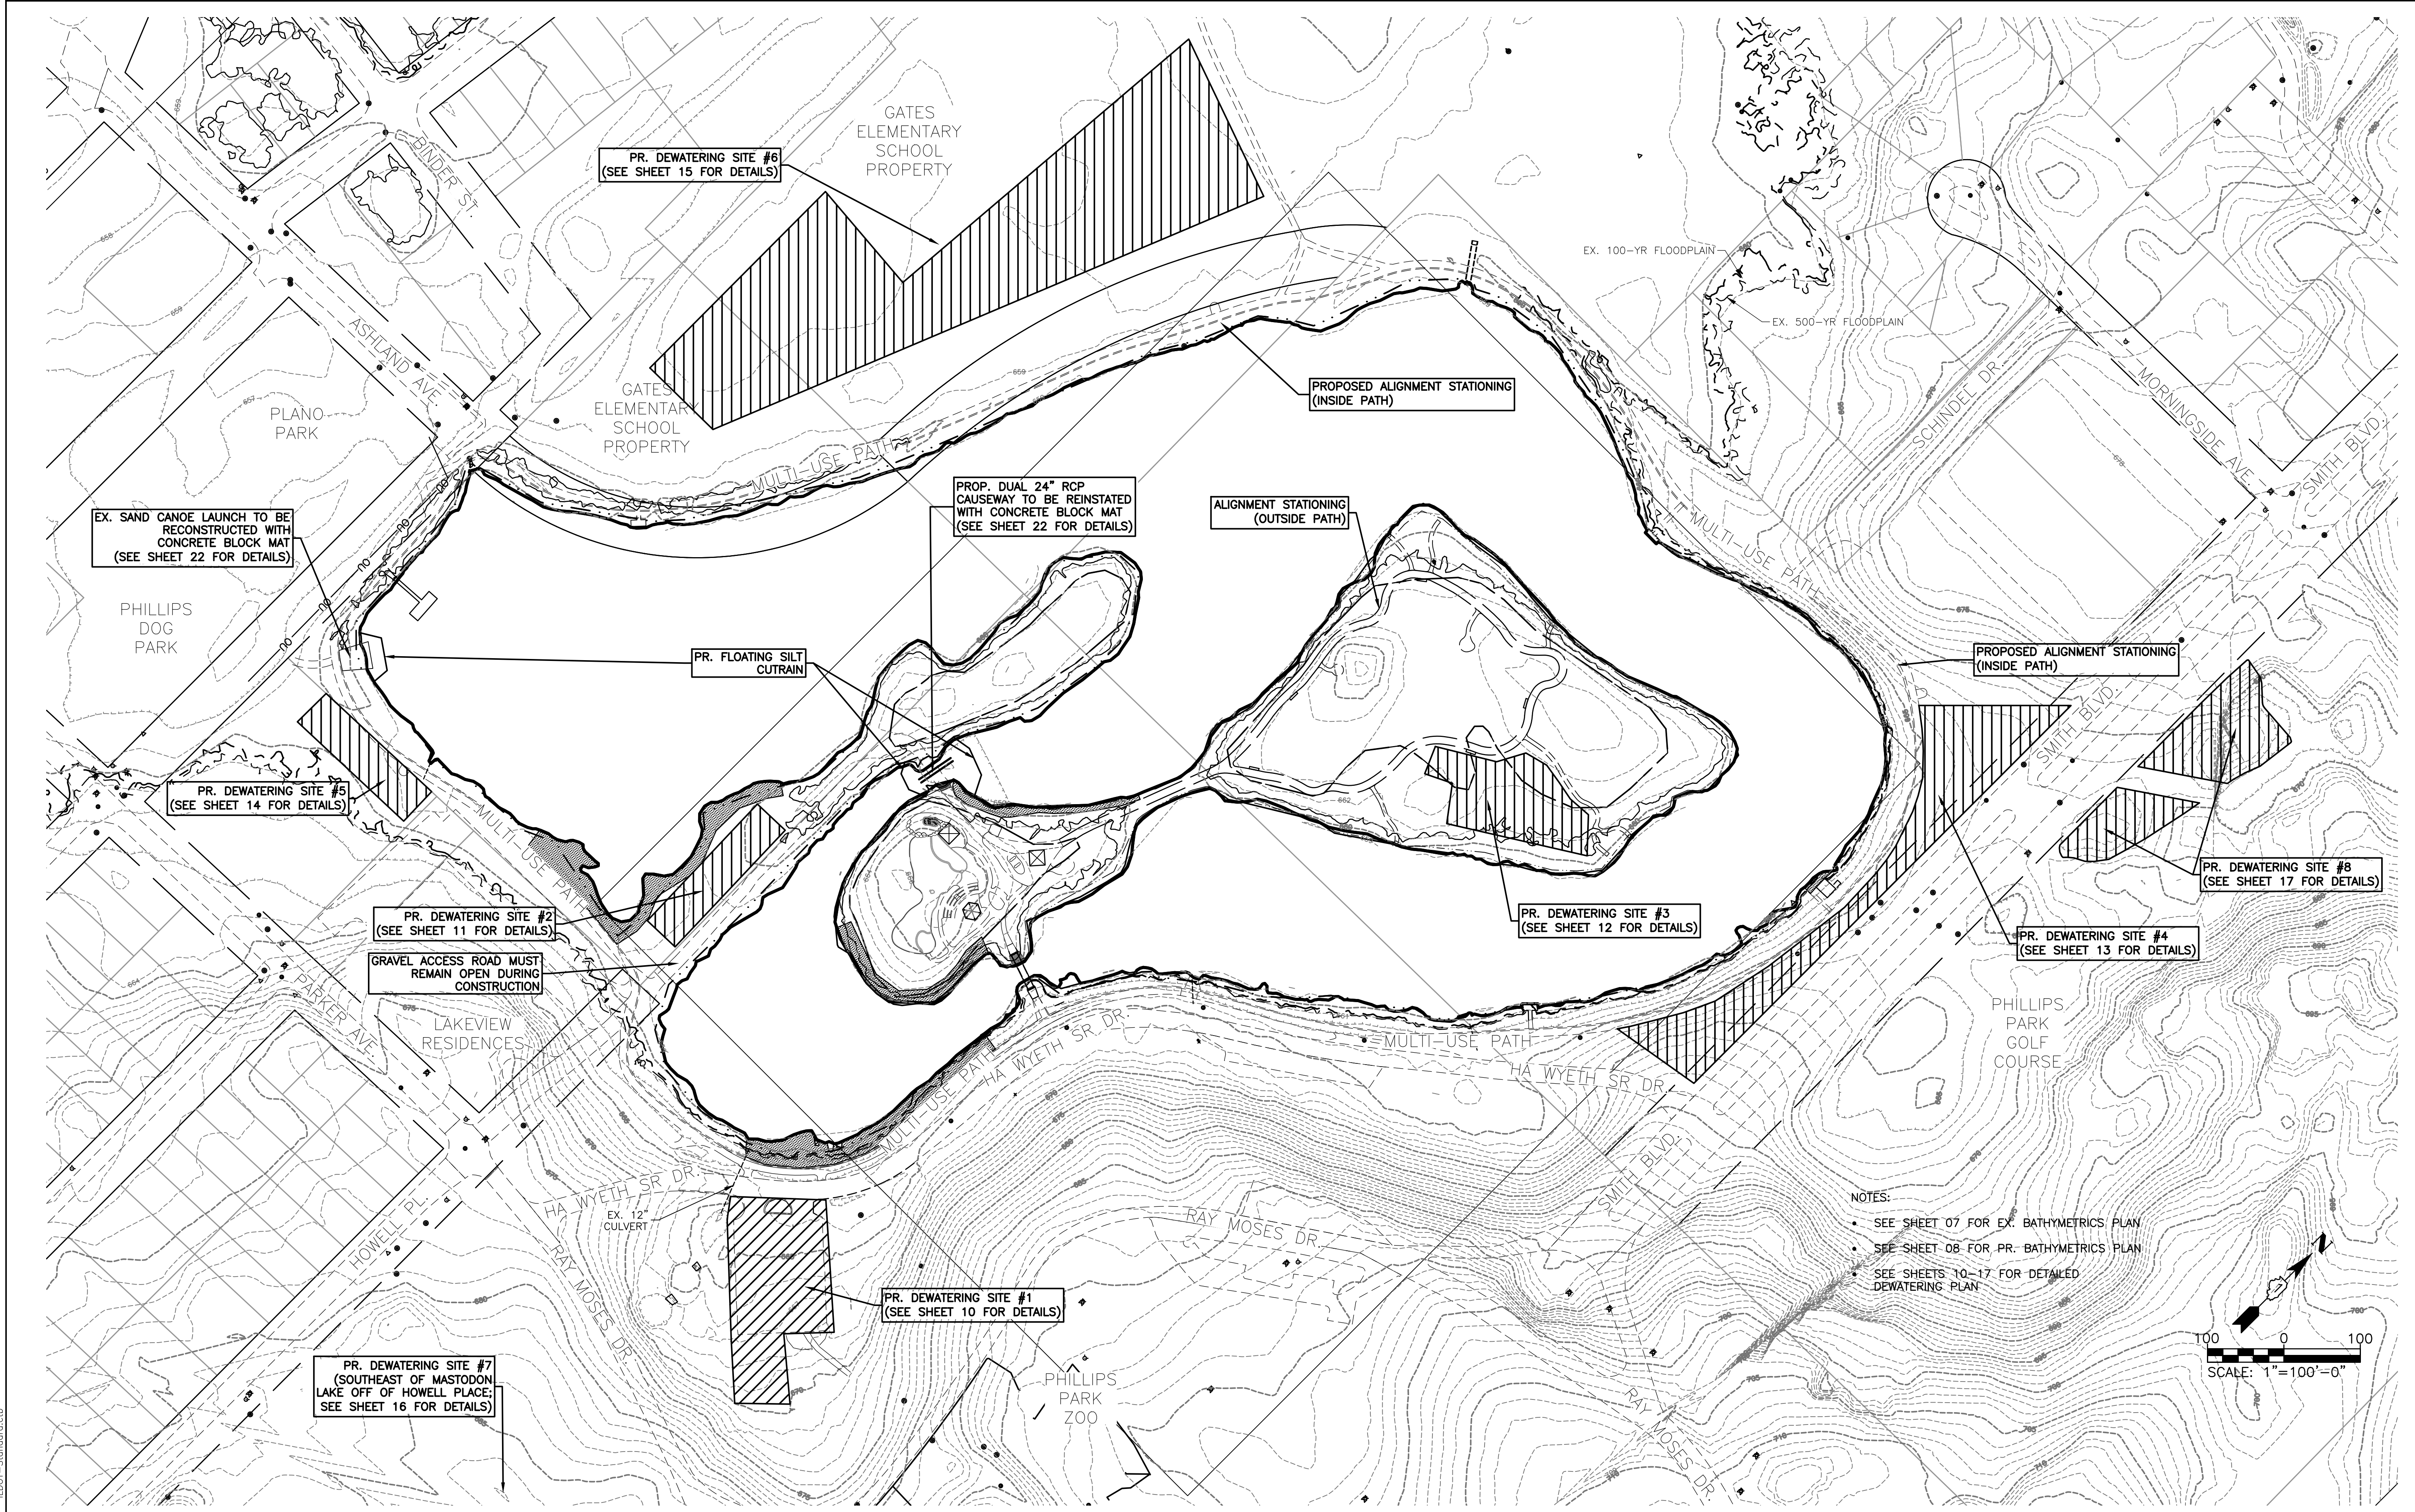

NOTES:

- SEE SHEET 07 FOR EX. BATHYMETRICS PLAN
- SEE SHEET 08 FOR PR. BATHYMETRICS PLAN
- SEE SHEETS 10-17 FOR DETAILED DEWATERING PLAN

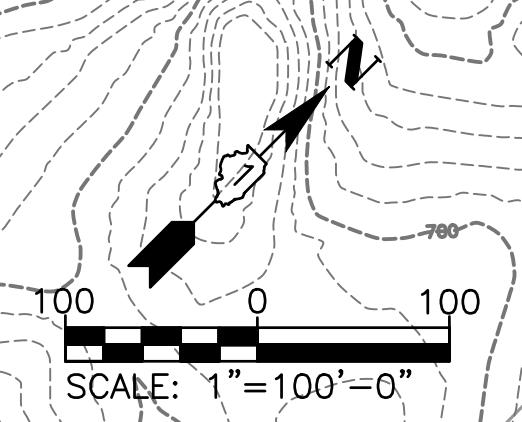

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen
 DATE PLOTTED: 2/6/2026 3:19 PM
 FILE NAME: 191806-Overall-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI
 FILE NAME = 191806-Overall-Plan
 PLOT SCALE = 1"=100'
 PLOT DATE = 2/6/2026


DESIGNED - LRG
 DRAWN - MPL/RMY
 CHECKED - LRG
 DATE -

REVISED -
 REVISED -
 REVISED -
 REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

OVERALL PLAN / OVERALL DEWATERING PLAN
 SCALE: 1"=100' SHEET NO. 01 OF 01 SHEETS STA. TO STA.


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	06
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

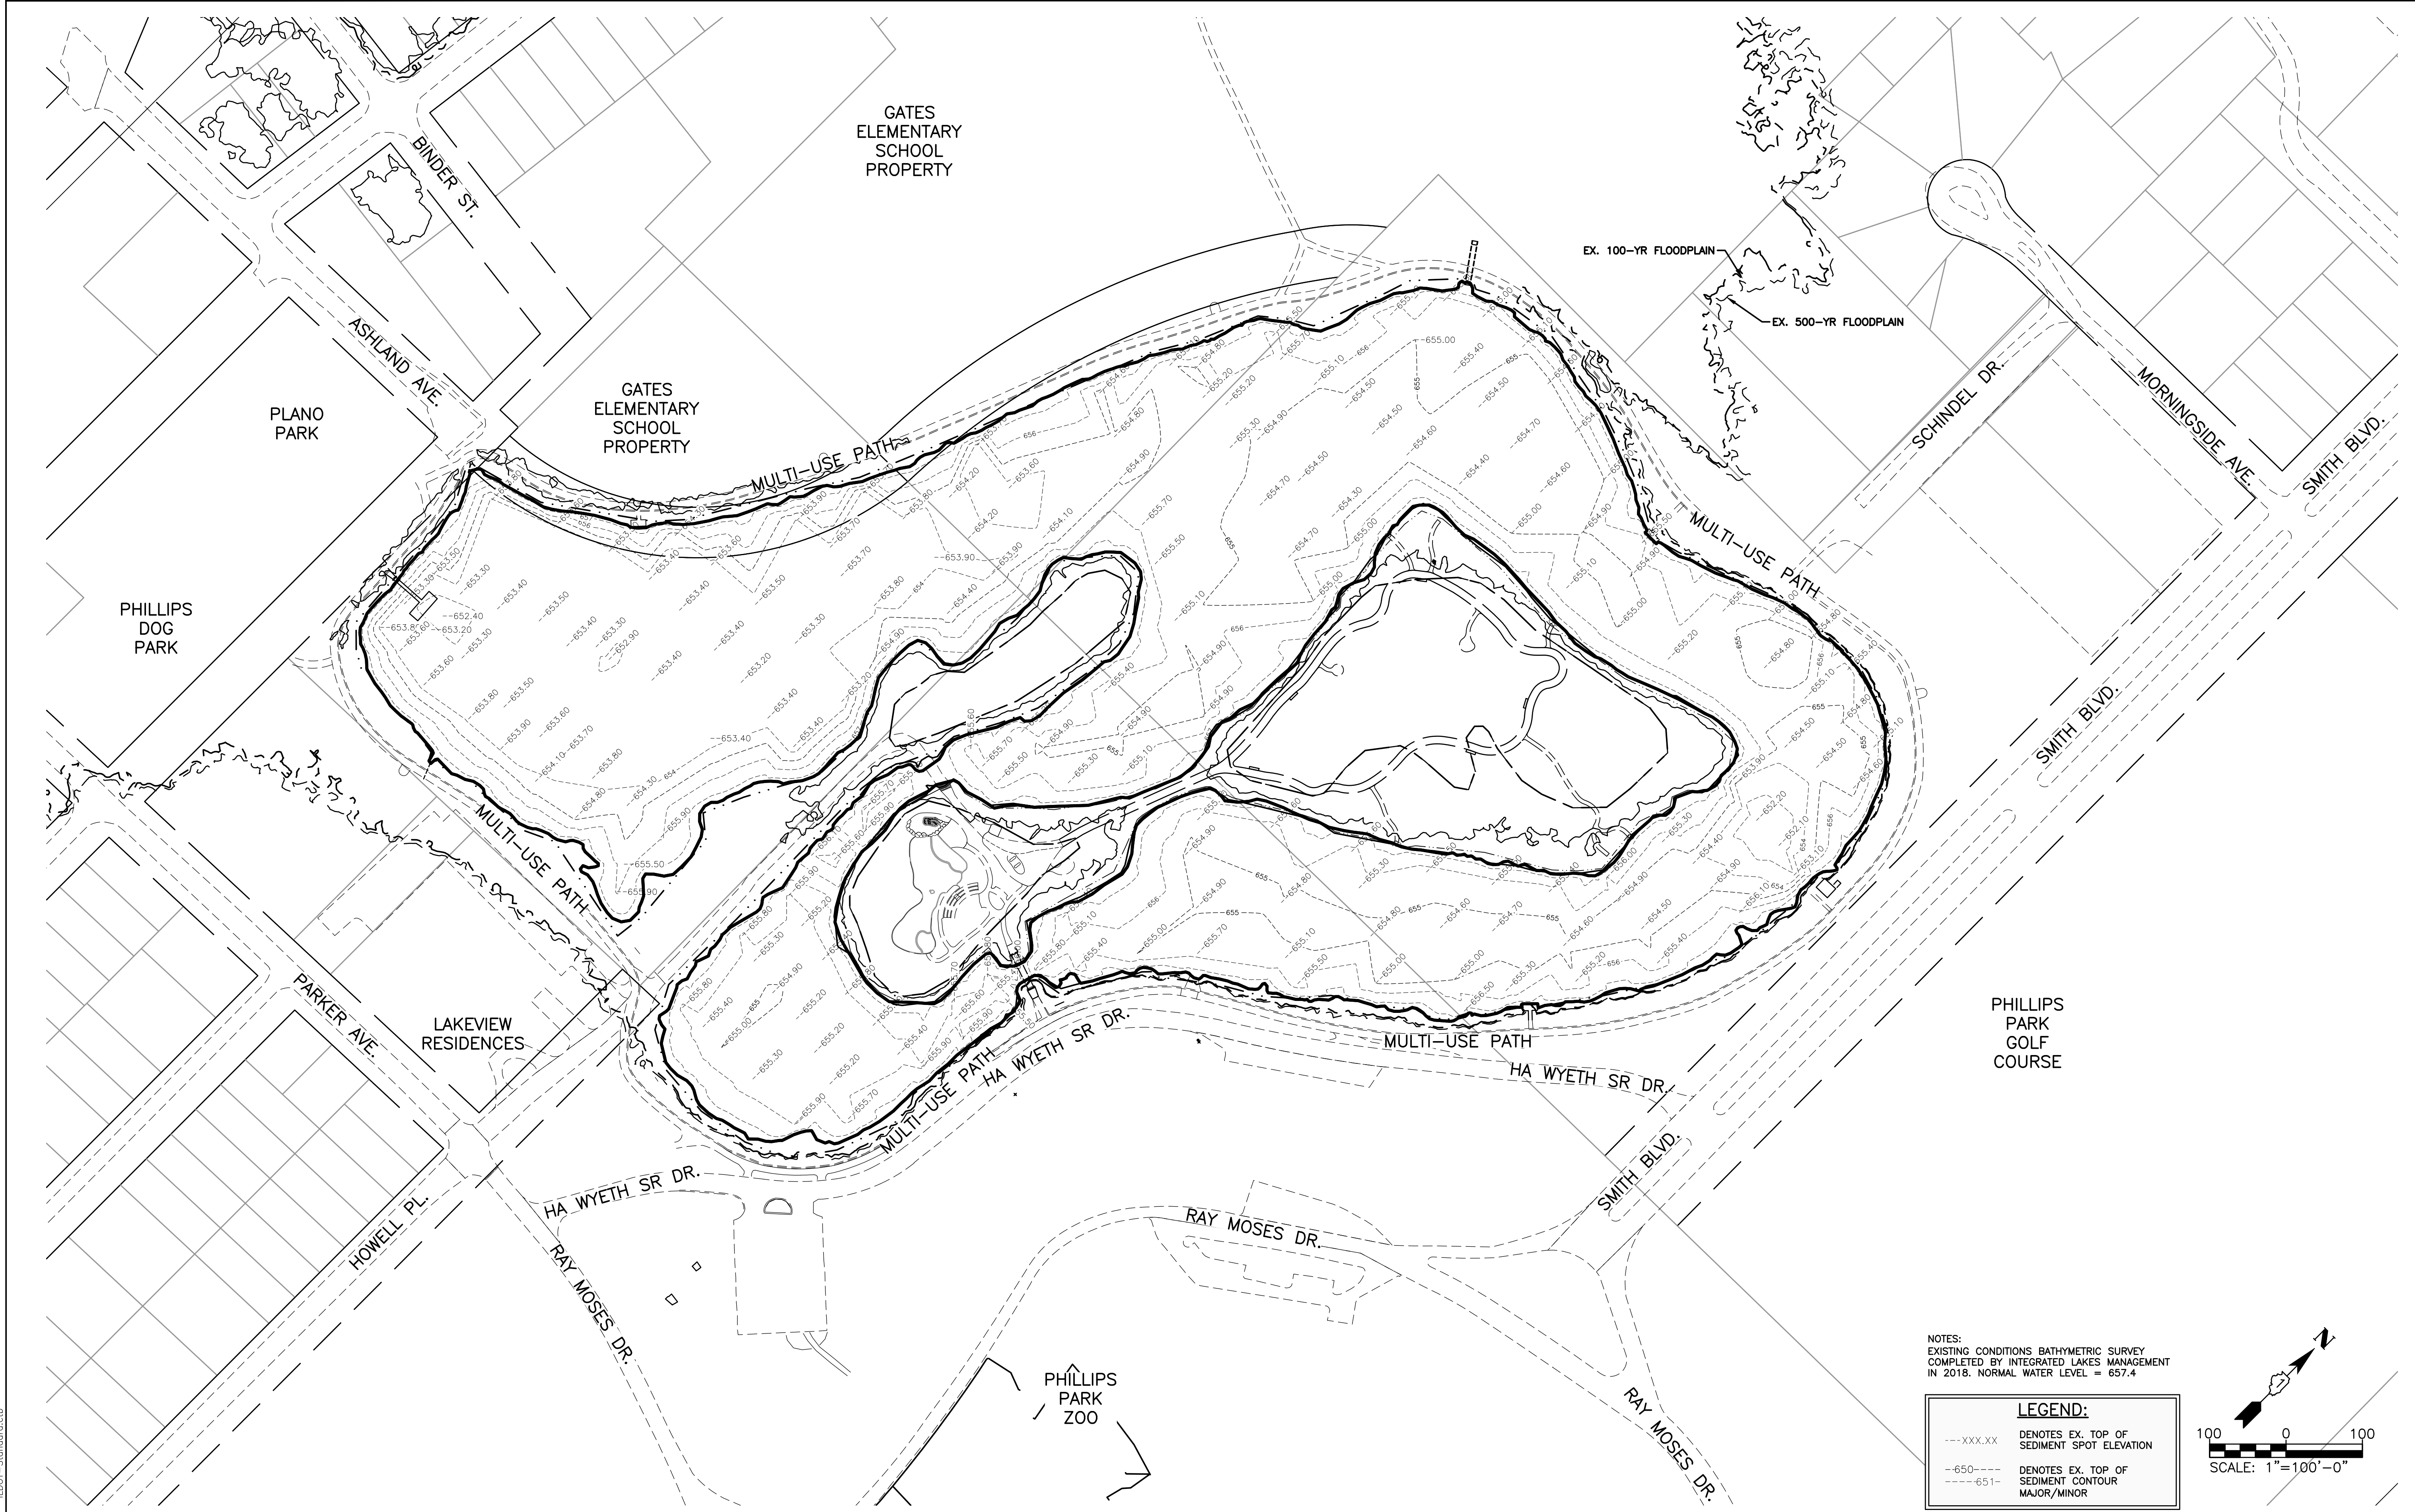

NOTES:
 EXISTING CONDITIONS BATHYMETRIC SURVEY
 COMPLETED BY INTEGRATED LAKES MANAGEMENT
 IN 2018. NORMAL WATER LEVEL = 657.4

LEGEND:

---XXX.XX	DENOTES EX. TOP OF SEDIMENT SPOT ELEVATION
-650----	DENOTES EX. TOP OF SEDIMENT CONTOUR MAJOR/MINOR

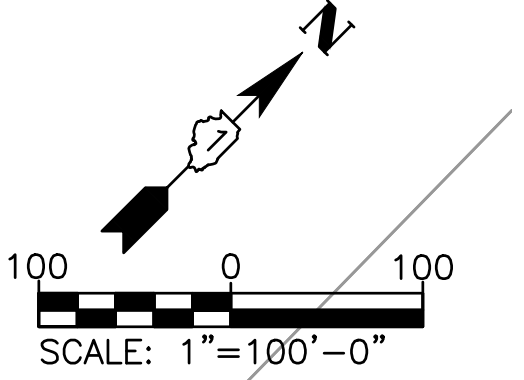

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: [Name]
 DATE PLOTTED: 2/6/2026 3:20 PM
 FILE NAME: 191806-Overall-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Overall-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=100'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

OVERALL EXISTING BATHYMETRICS PLAN		
SCALE: 1"=100'	SHEET NO. 01 OF 01 SHEETS	STA. TO STA.


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	07
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

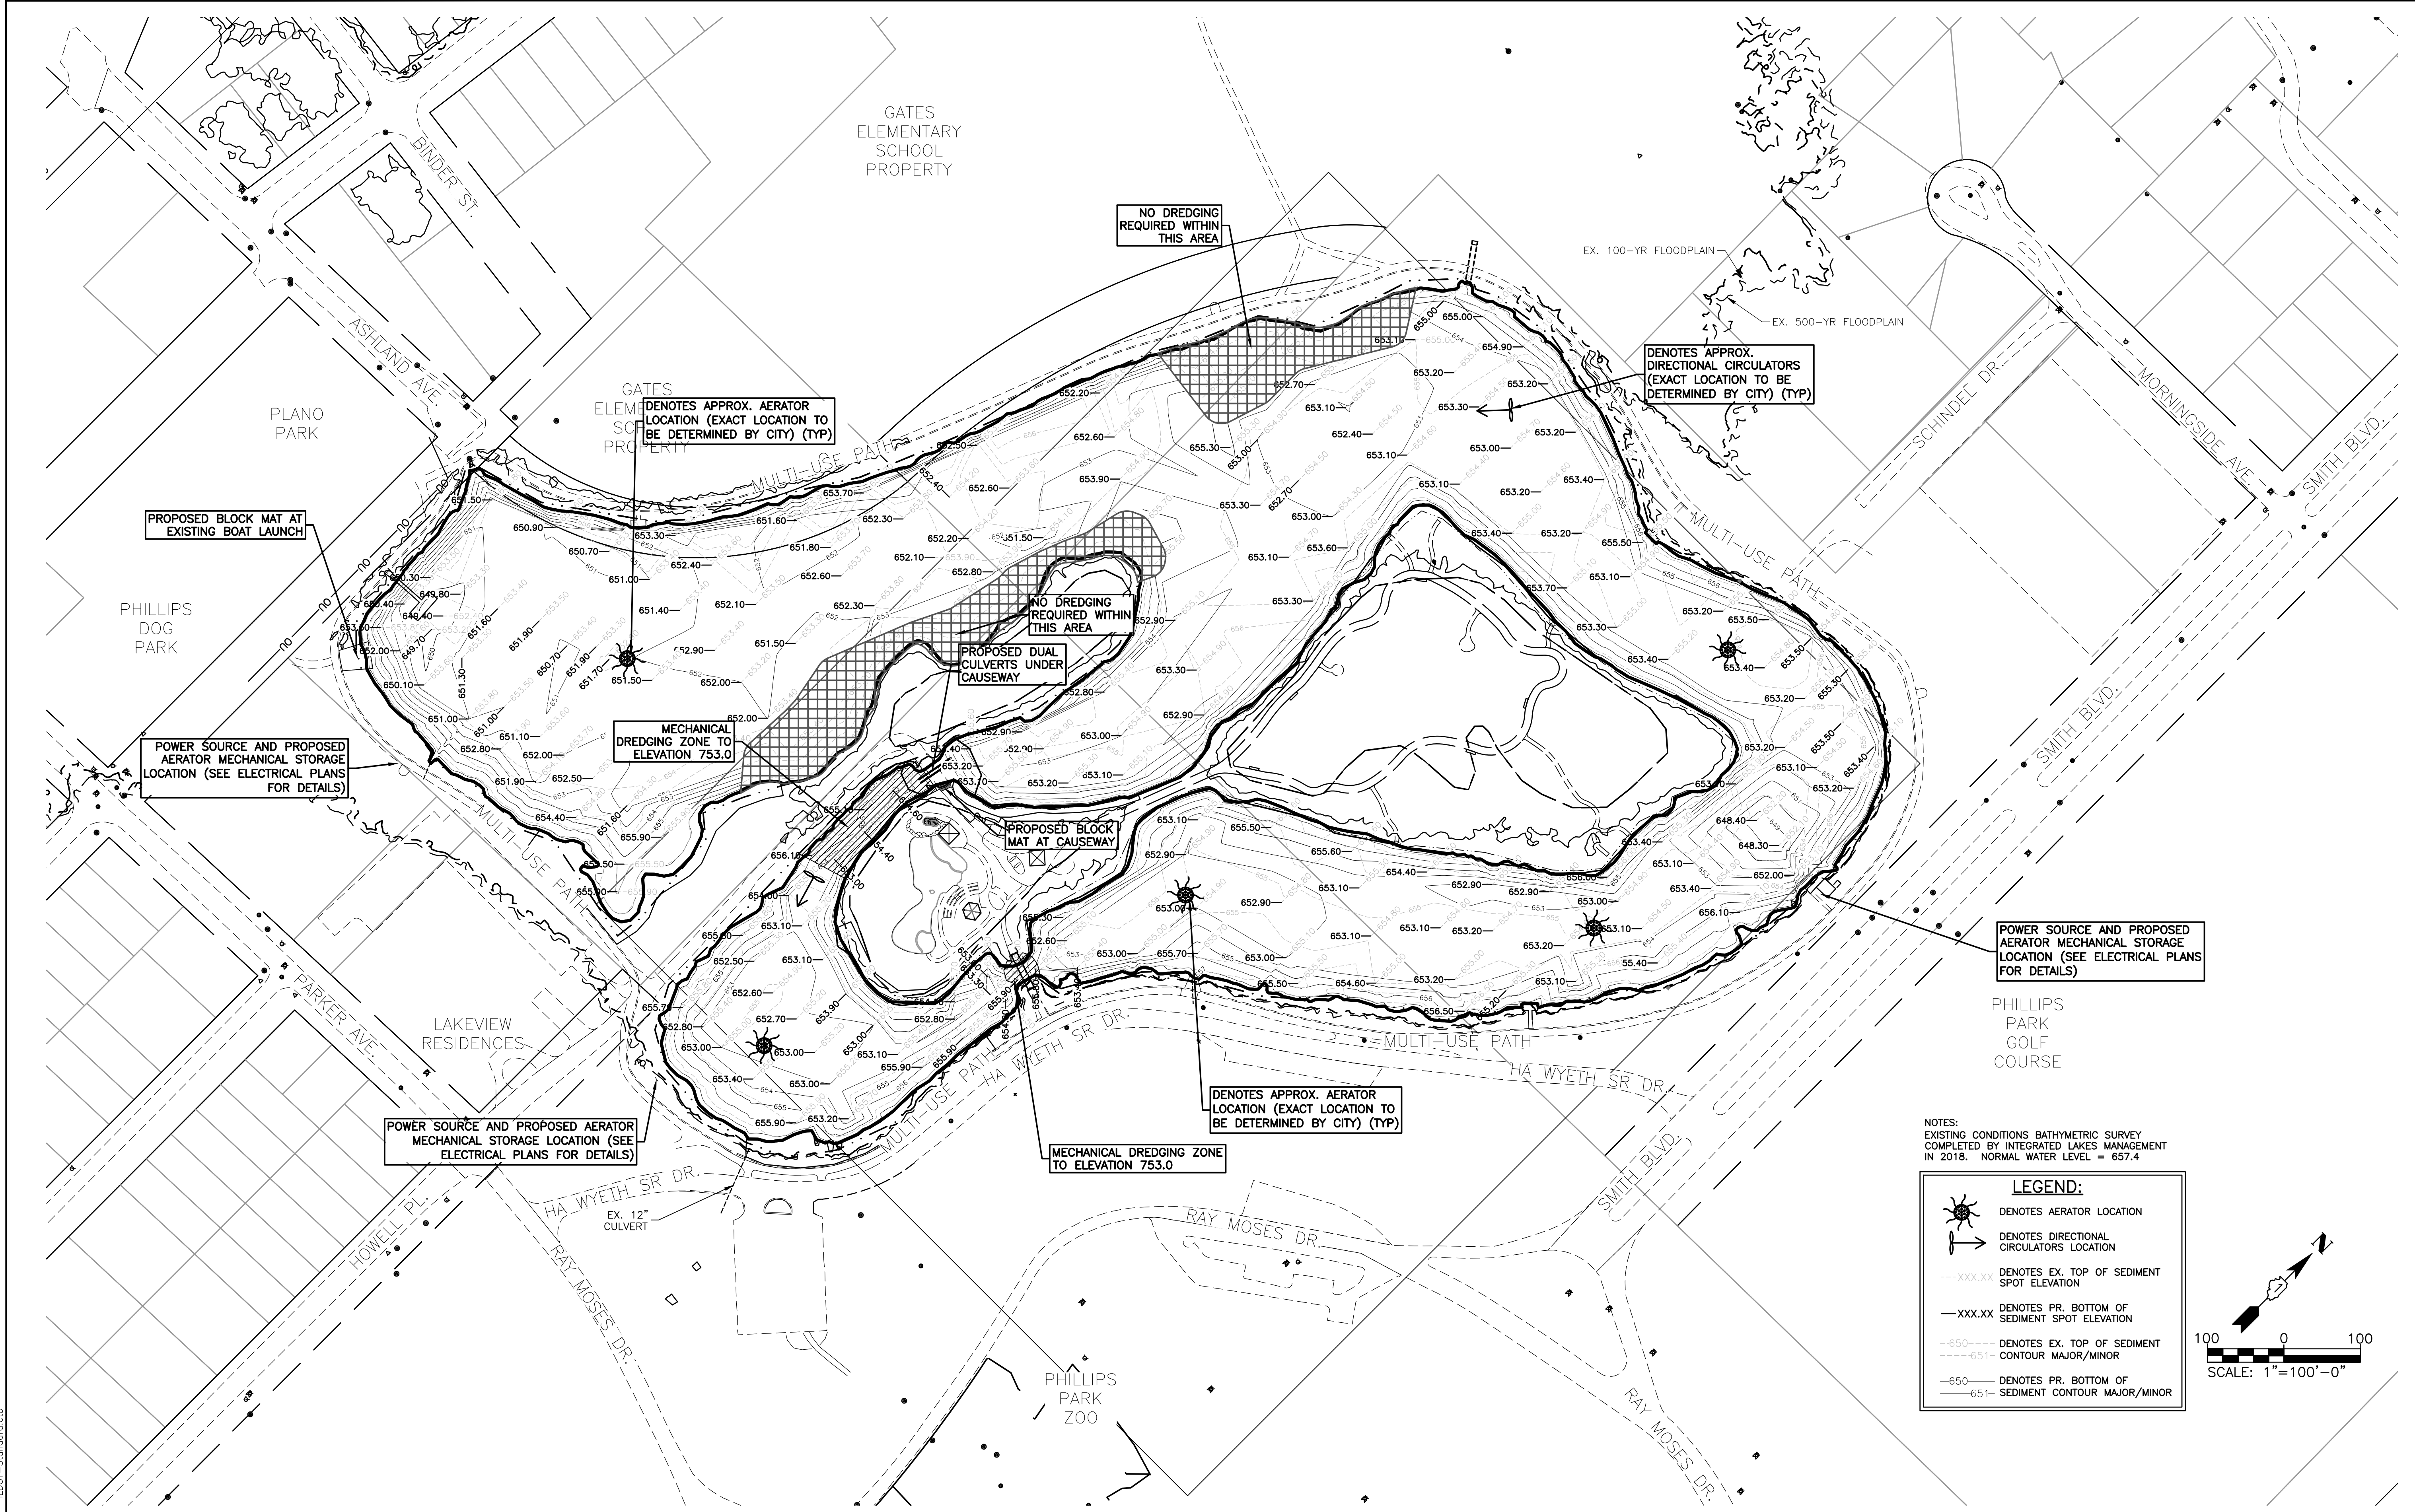

NOTES:
 EXISTING CONDITIONS BATHYMETRIC SURVEY COMPLETED BY INTEGRATED LAKES MANAGEMENT IN 2018. NORMAL WATER LEVEL = 657.4

LEGEND:

- DENOTES AERATOR LOCATION
- DENOTES DIRECTIONAL CIRCULATORS LOCATION
- DENOTES EX. TOP OF SEDIMENT SPOT ELEVATION
- DENOTES PR. BOTTOM OF SEDIMENT SPOT ELEVATION
- DENOTES EX. TOP OF SEDIMENT CONTOUR MAJOR/MINOR
- DENOTES PR. BOTTOM OF SEDIMENT CONTOUR MAJOR/MINOR

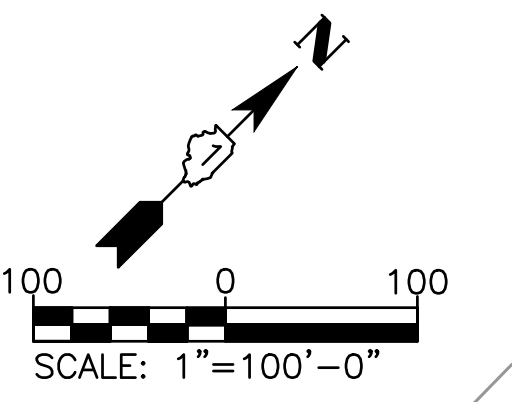

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:20 PM
 FILE NAME: 191806-Overall-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb

HRGreen.com
 Illinois Professional Design Firm
 #184.001322

USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Overall-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=100'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

OVERALL PROPOSED BATHYMETRICS PLAN



SCALE: 1"=100' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	08
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

RESTORATION LEGEND:

- INDICATES TURF GRASS SEED (AURORA SEED MIX AND MULCH METHOD 3)(SEE SPECIFICATIONS)
- INDICATES NATIVE GRASS SEED (SEEDING, CL 4A MIX AND EROSION CONTROL BLANKET, S75-BN)
- INDICATES INTERLOCKING CONCRETE BLOCK MAT (SEE SHEET 21 FOR DETAILS)
- 650--- DENOTES EX. TOP OF GROUND CONTOUR MAJOR/MINOR
- 651--- DENOTES EX. TOP OF SEDIMENT CONTOUR MAJOR/MINOR
- 650--- DENOTES PR. LAKE BOTTOM CONTOUR MAJOR/MINOR
- XXX.XX DENOTES PR. LAKE BOTTOM SPOT ELEVATION
- DENOTES AERATOR LOCATION
- DENOTES DIRECTIONAL CIRCULATORS LOCATION

- NOTES:**
- ALL TREES ARE TO REMAIN UNLESS OTHERWISE NOTED. BANK TREATMENTS SHALL BE INSTALLED TO MINIMIZE IMPACTS TO THE ROOT STRUCTURE.
 - FOR MECHANICAL MIXING, SEE ELECTRICAL PLANS FOR DETAILS
 - SEE SHEET 27 FOR SEED/PLUG PLANTINGS AND SEEDING MIXTURES
 - DEWATERING SITE #7 SHALL BE RESTORED WITH S75-BN

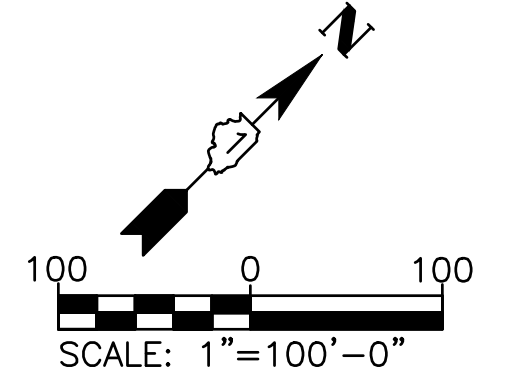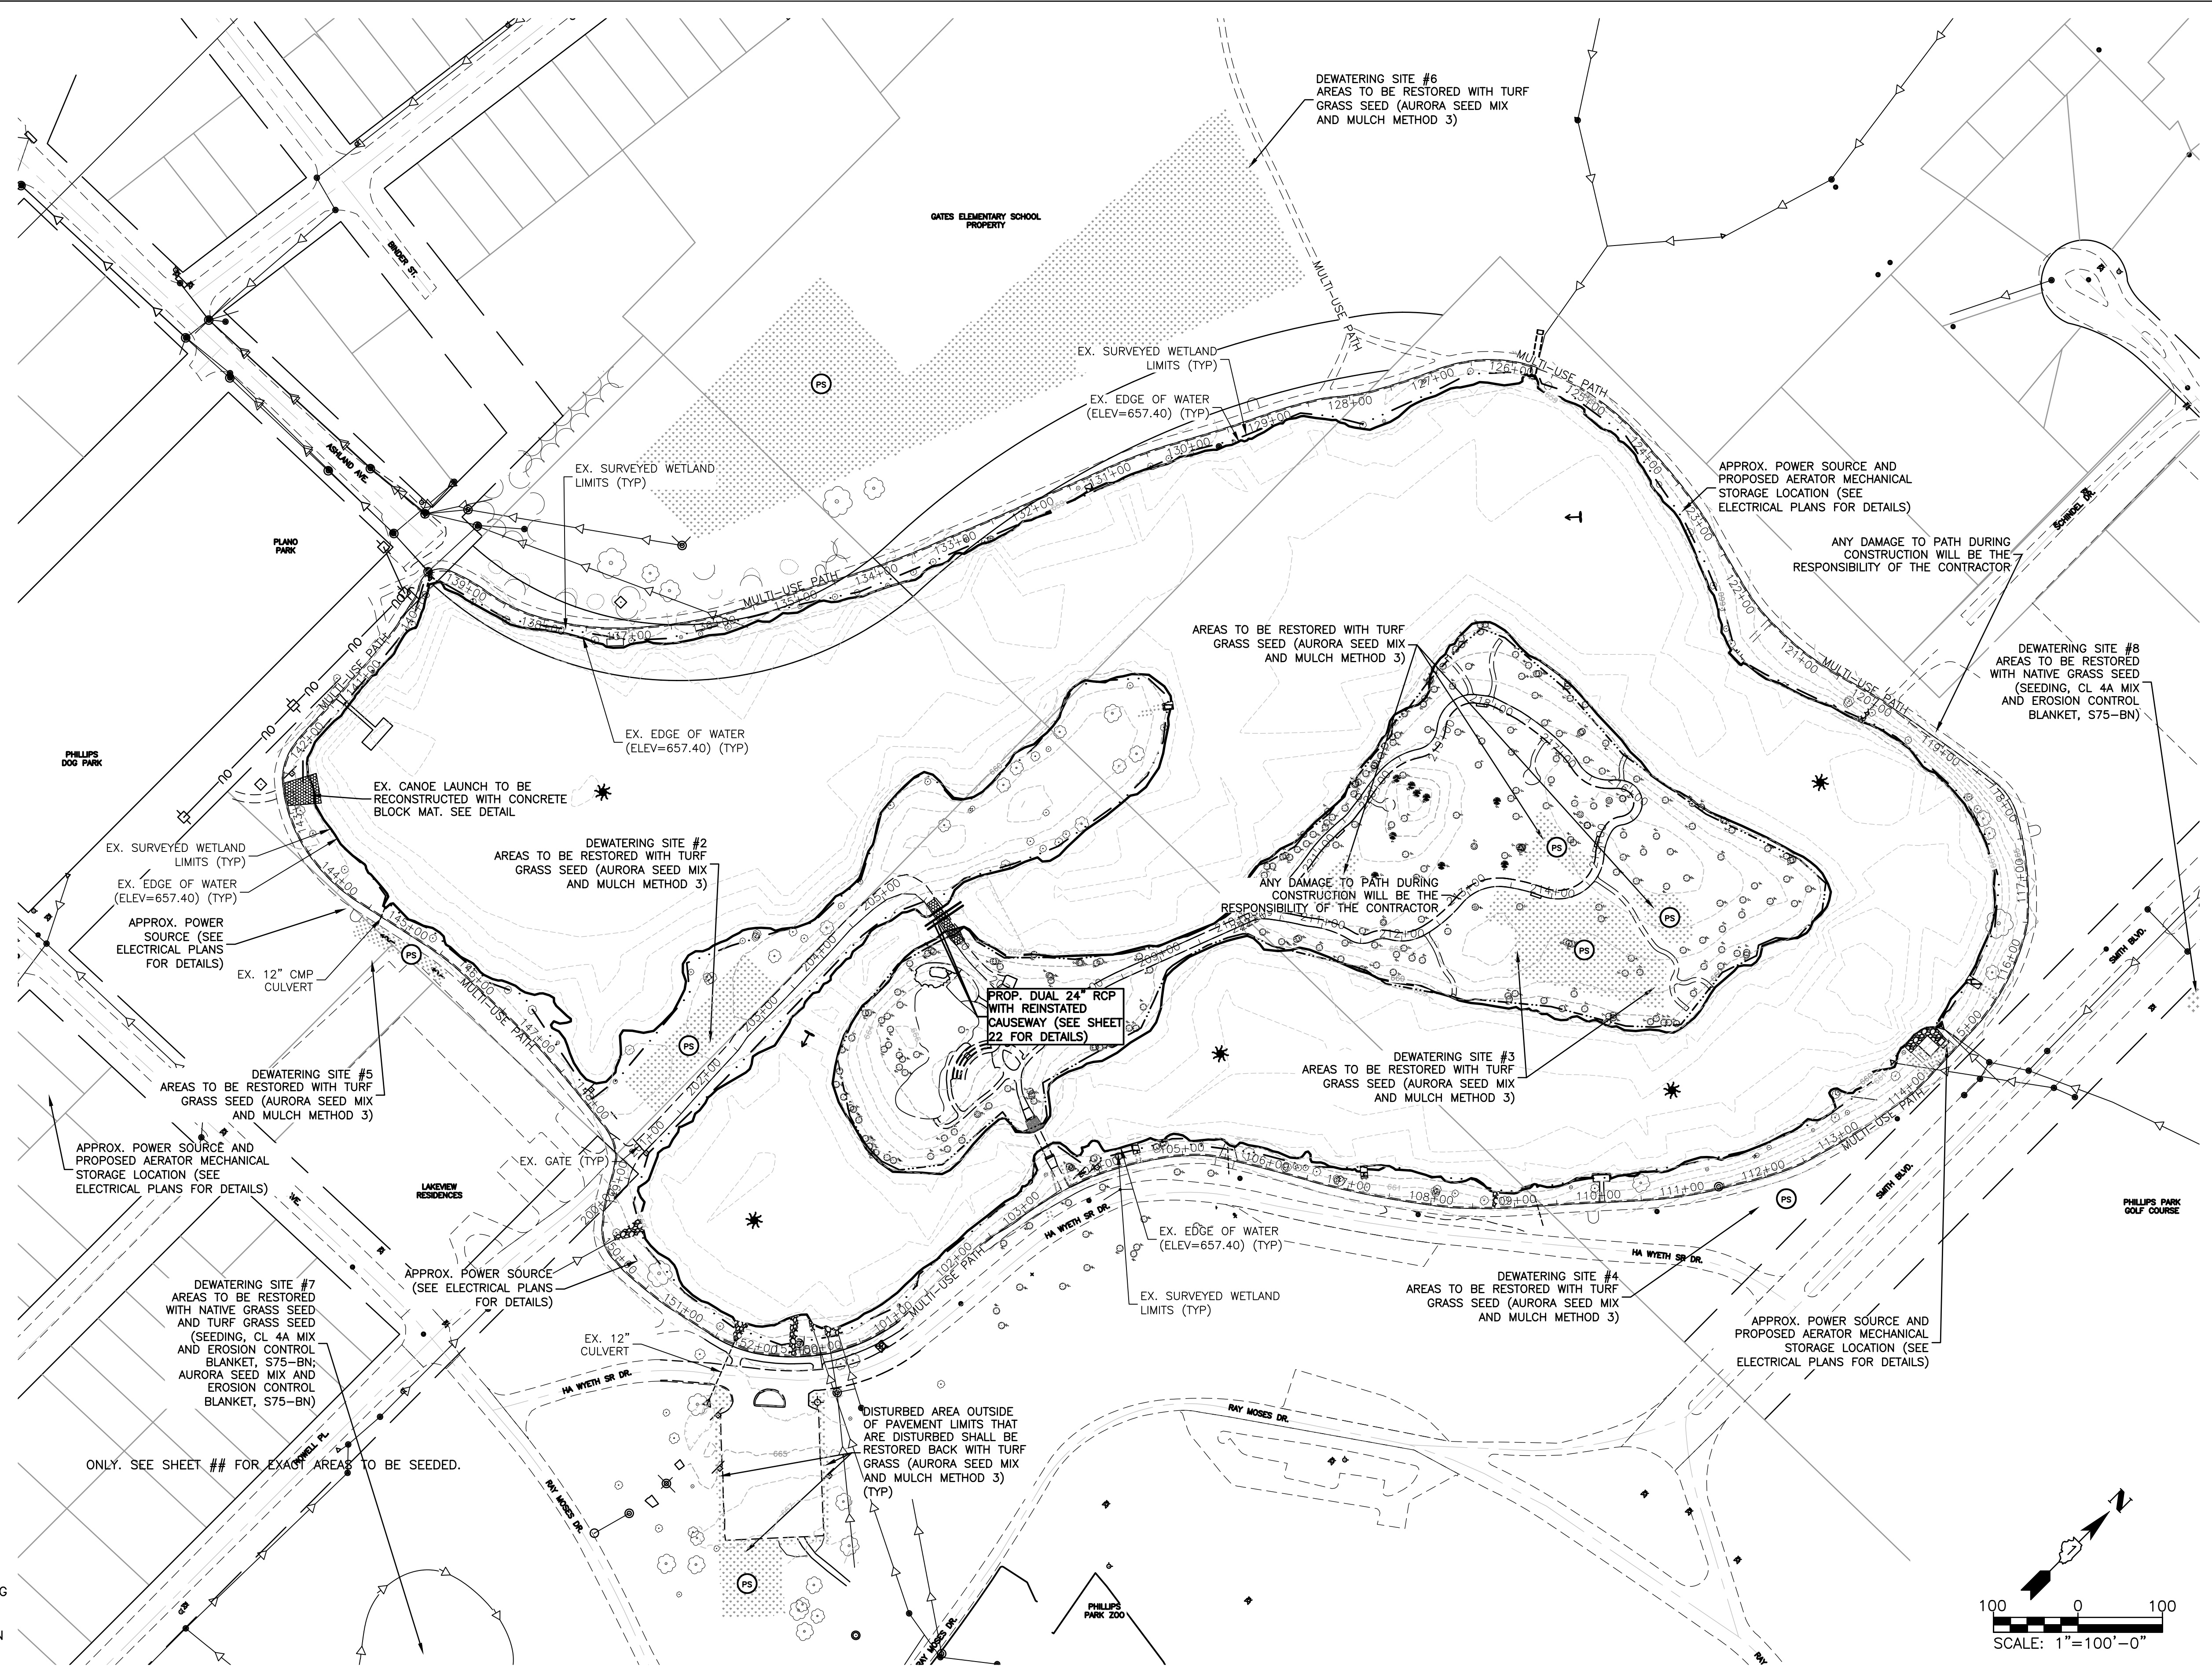

COMPANY NAME: HRGreen.com
 CLIENT CONTACT: Illinois Professional Design Firm #184.001322
 DATE PLOTTED: 2/6/2026 3:20 PM
 FILE NAME: 191806-Restoration-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb


USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Restoration-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=100'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT**

OVERALL RESTORATION PLAN


SCALE: 1"=100' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	09
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

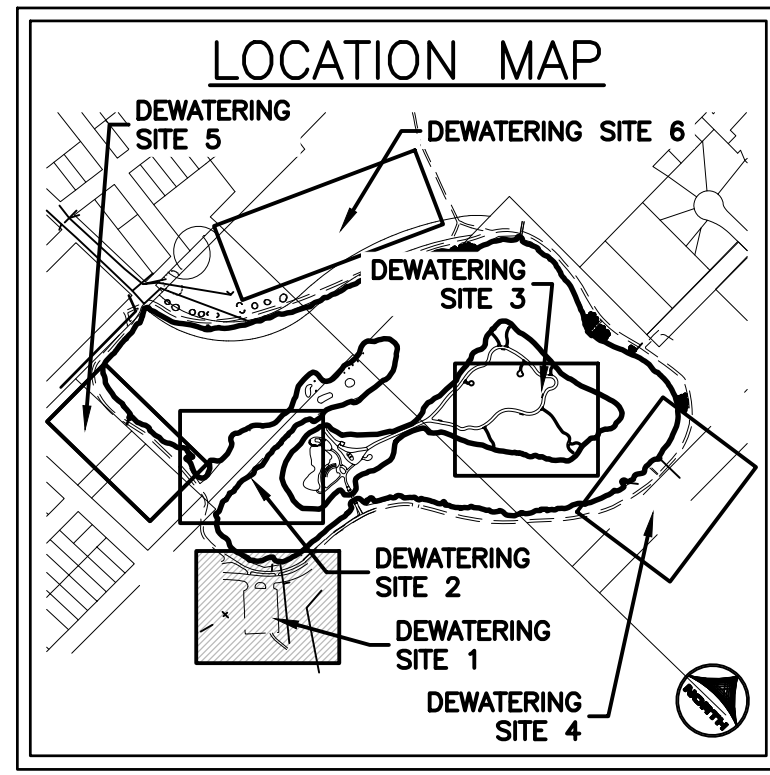

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- IF THE CONTRACTOR WISHES TO USE A PUMP HOSE GREATER THAN 8" THEN AN ALTERNATIVE METHOD OF CROSSING THE ROAD MUST BE UTILIZED. THE CONTRACTOR MAY INSTALL A TEMPORARY CULVERT OR TEMPORARY RAMP. THE ROAD MUST BE PASSABLE TO VEHICULAR TRAFFIC AT ALL TIMES. ALTERNATIVE MEASURES OF CROSSING THE ROAD ARE TO BE INSTALLED, MAINTAINED AND REMOVED AT THE CONTRACTORS EXPENSE.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS

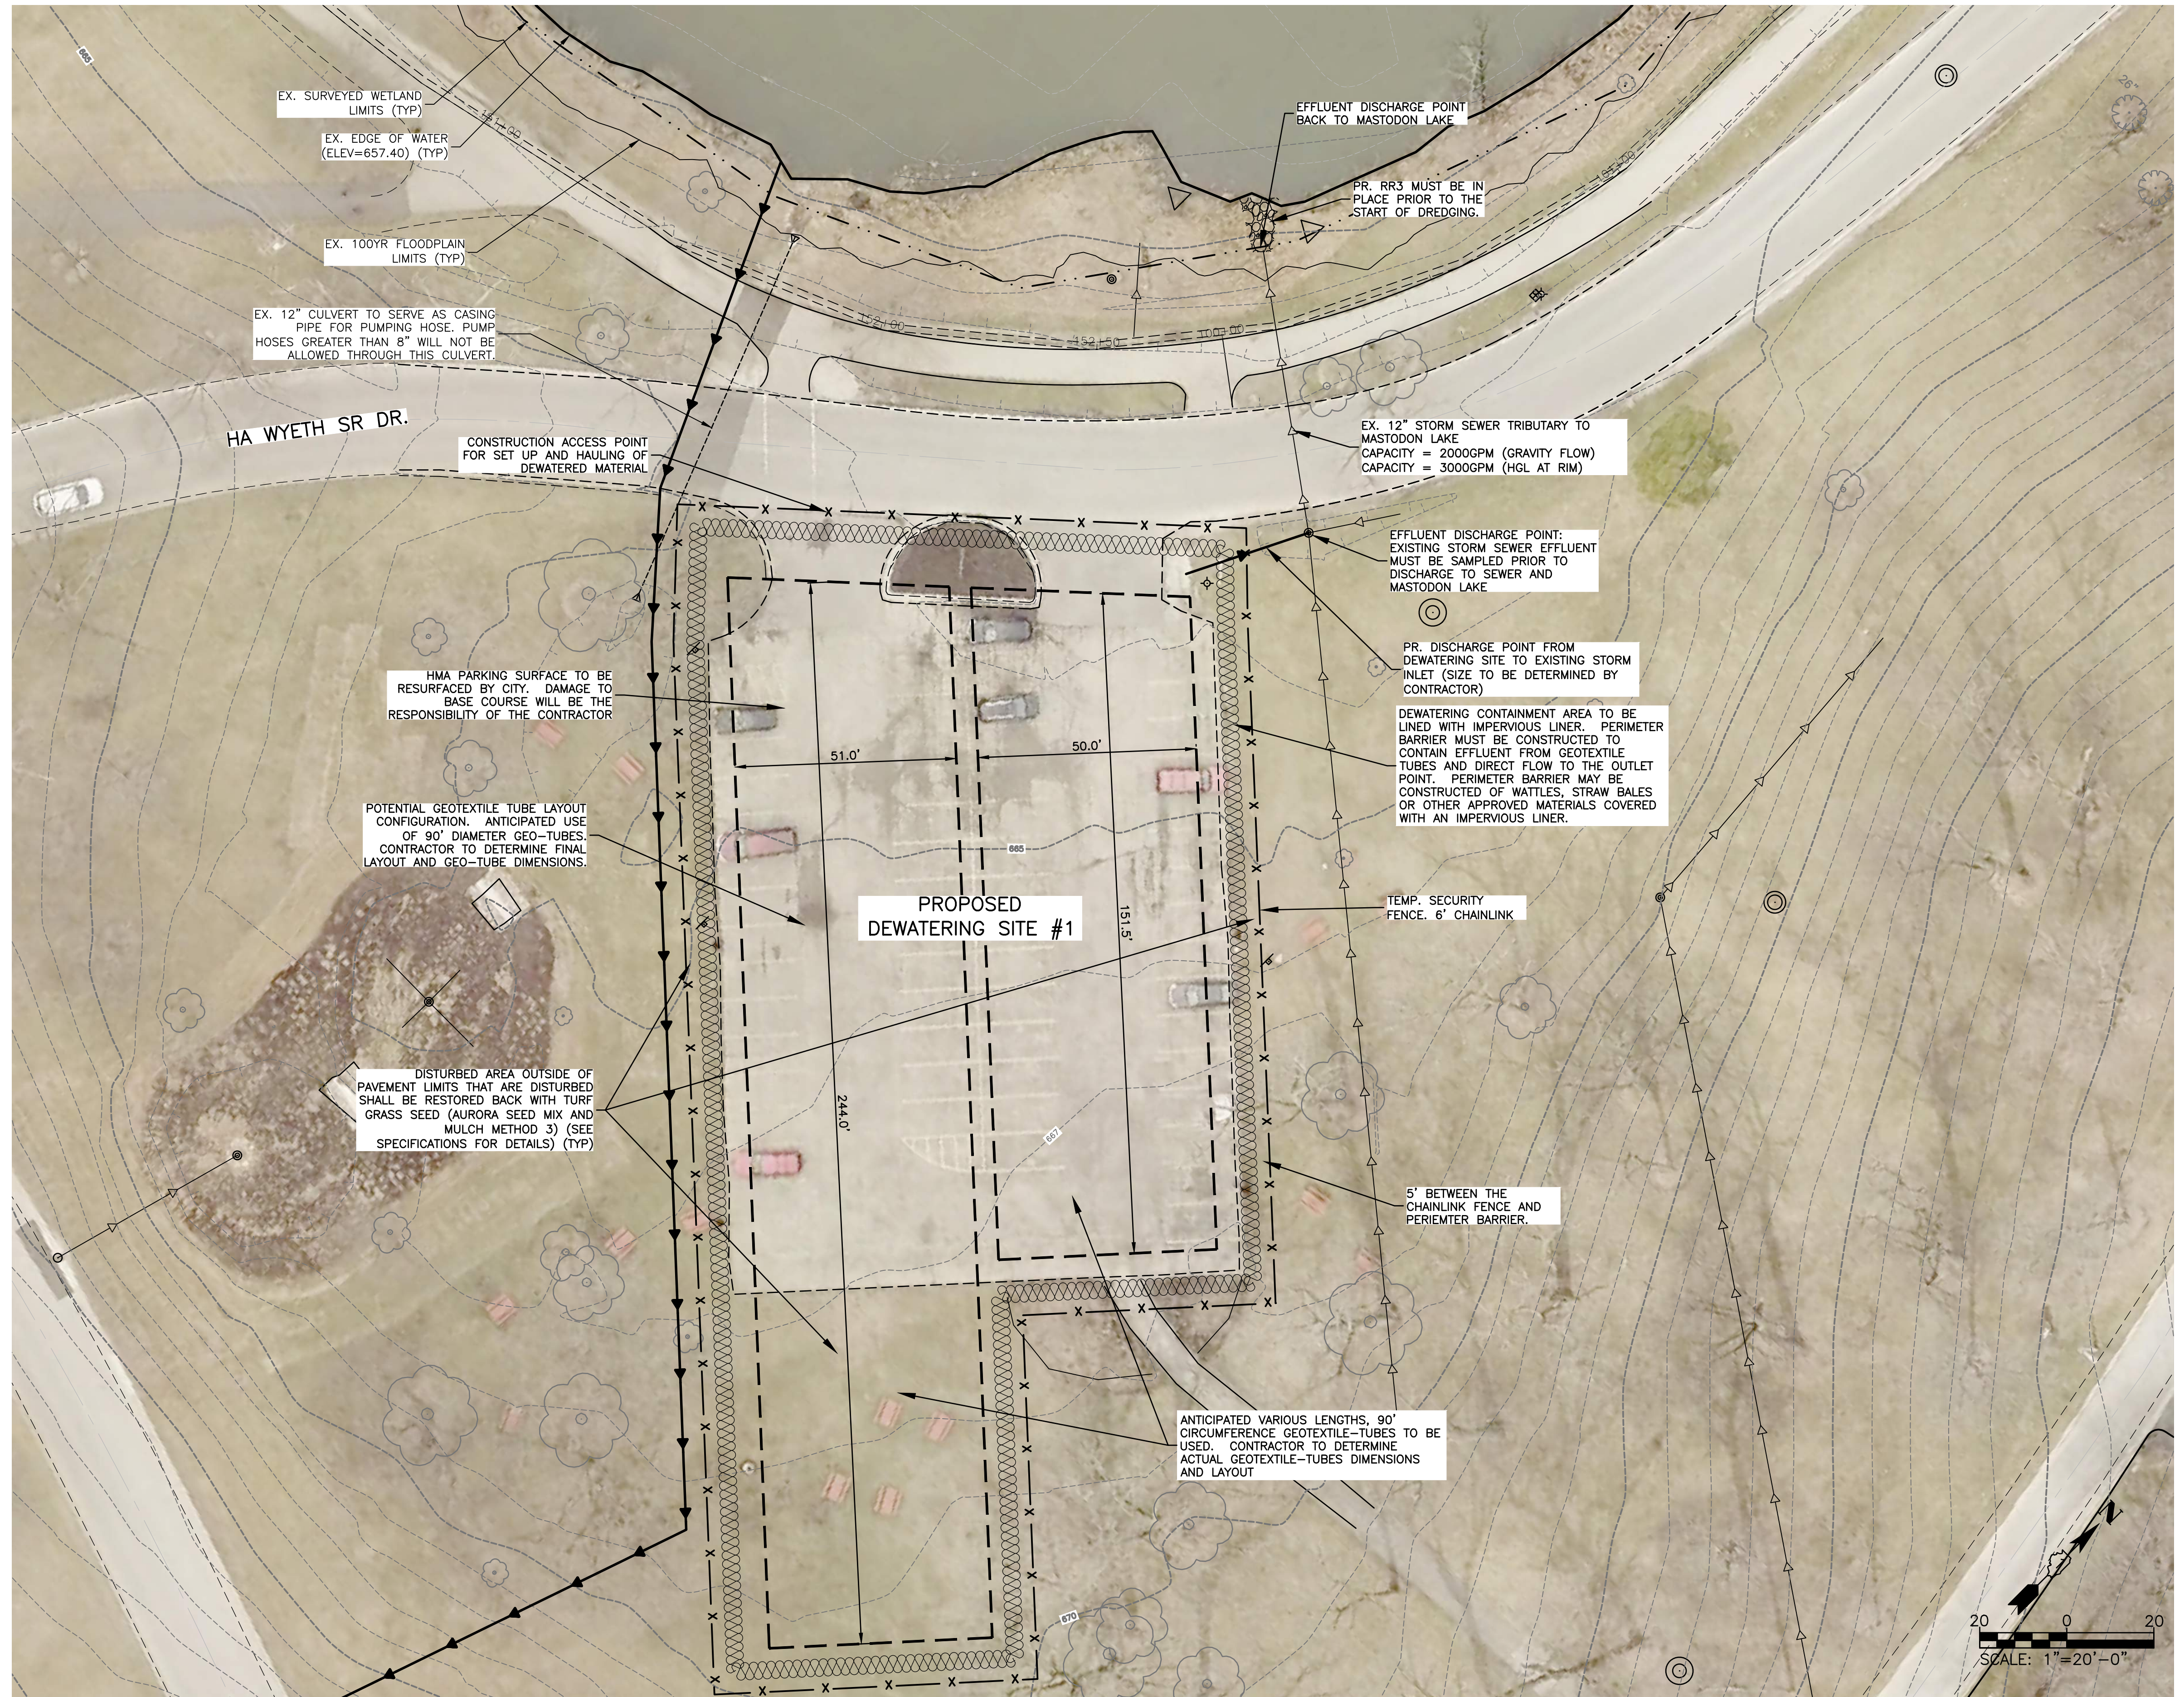

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:21 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
MASTODON LAKE DREDGING PROJECT**

PROPOSED DEWATERING SITE LOCATION 1


SCALE: 1"=20' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	10
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

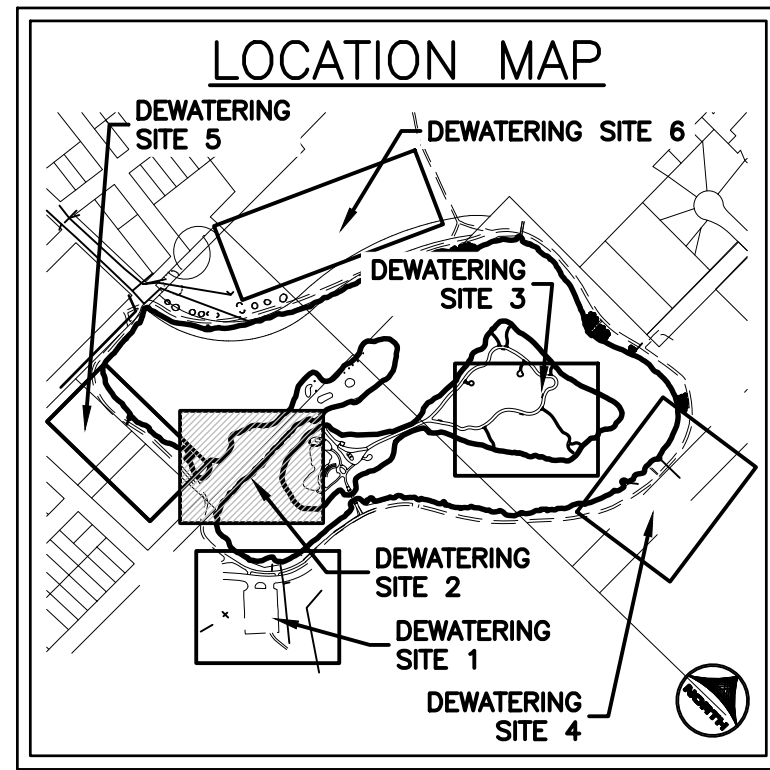

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- ALL TREES ARE TO REMAIN.
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS

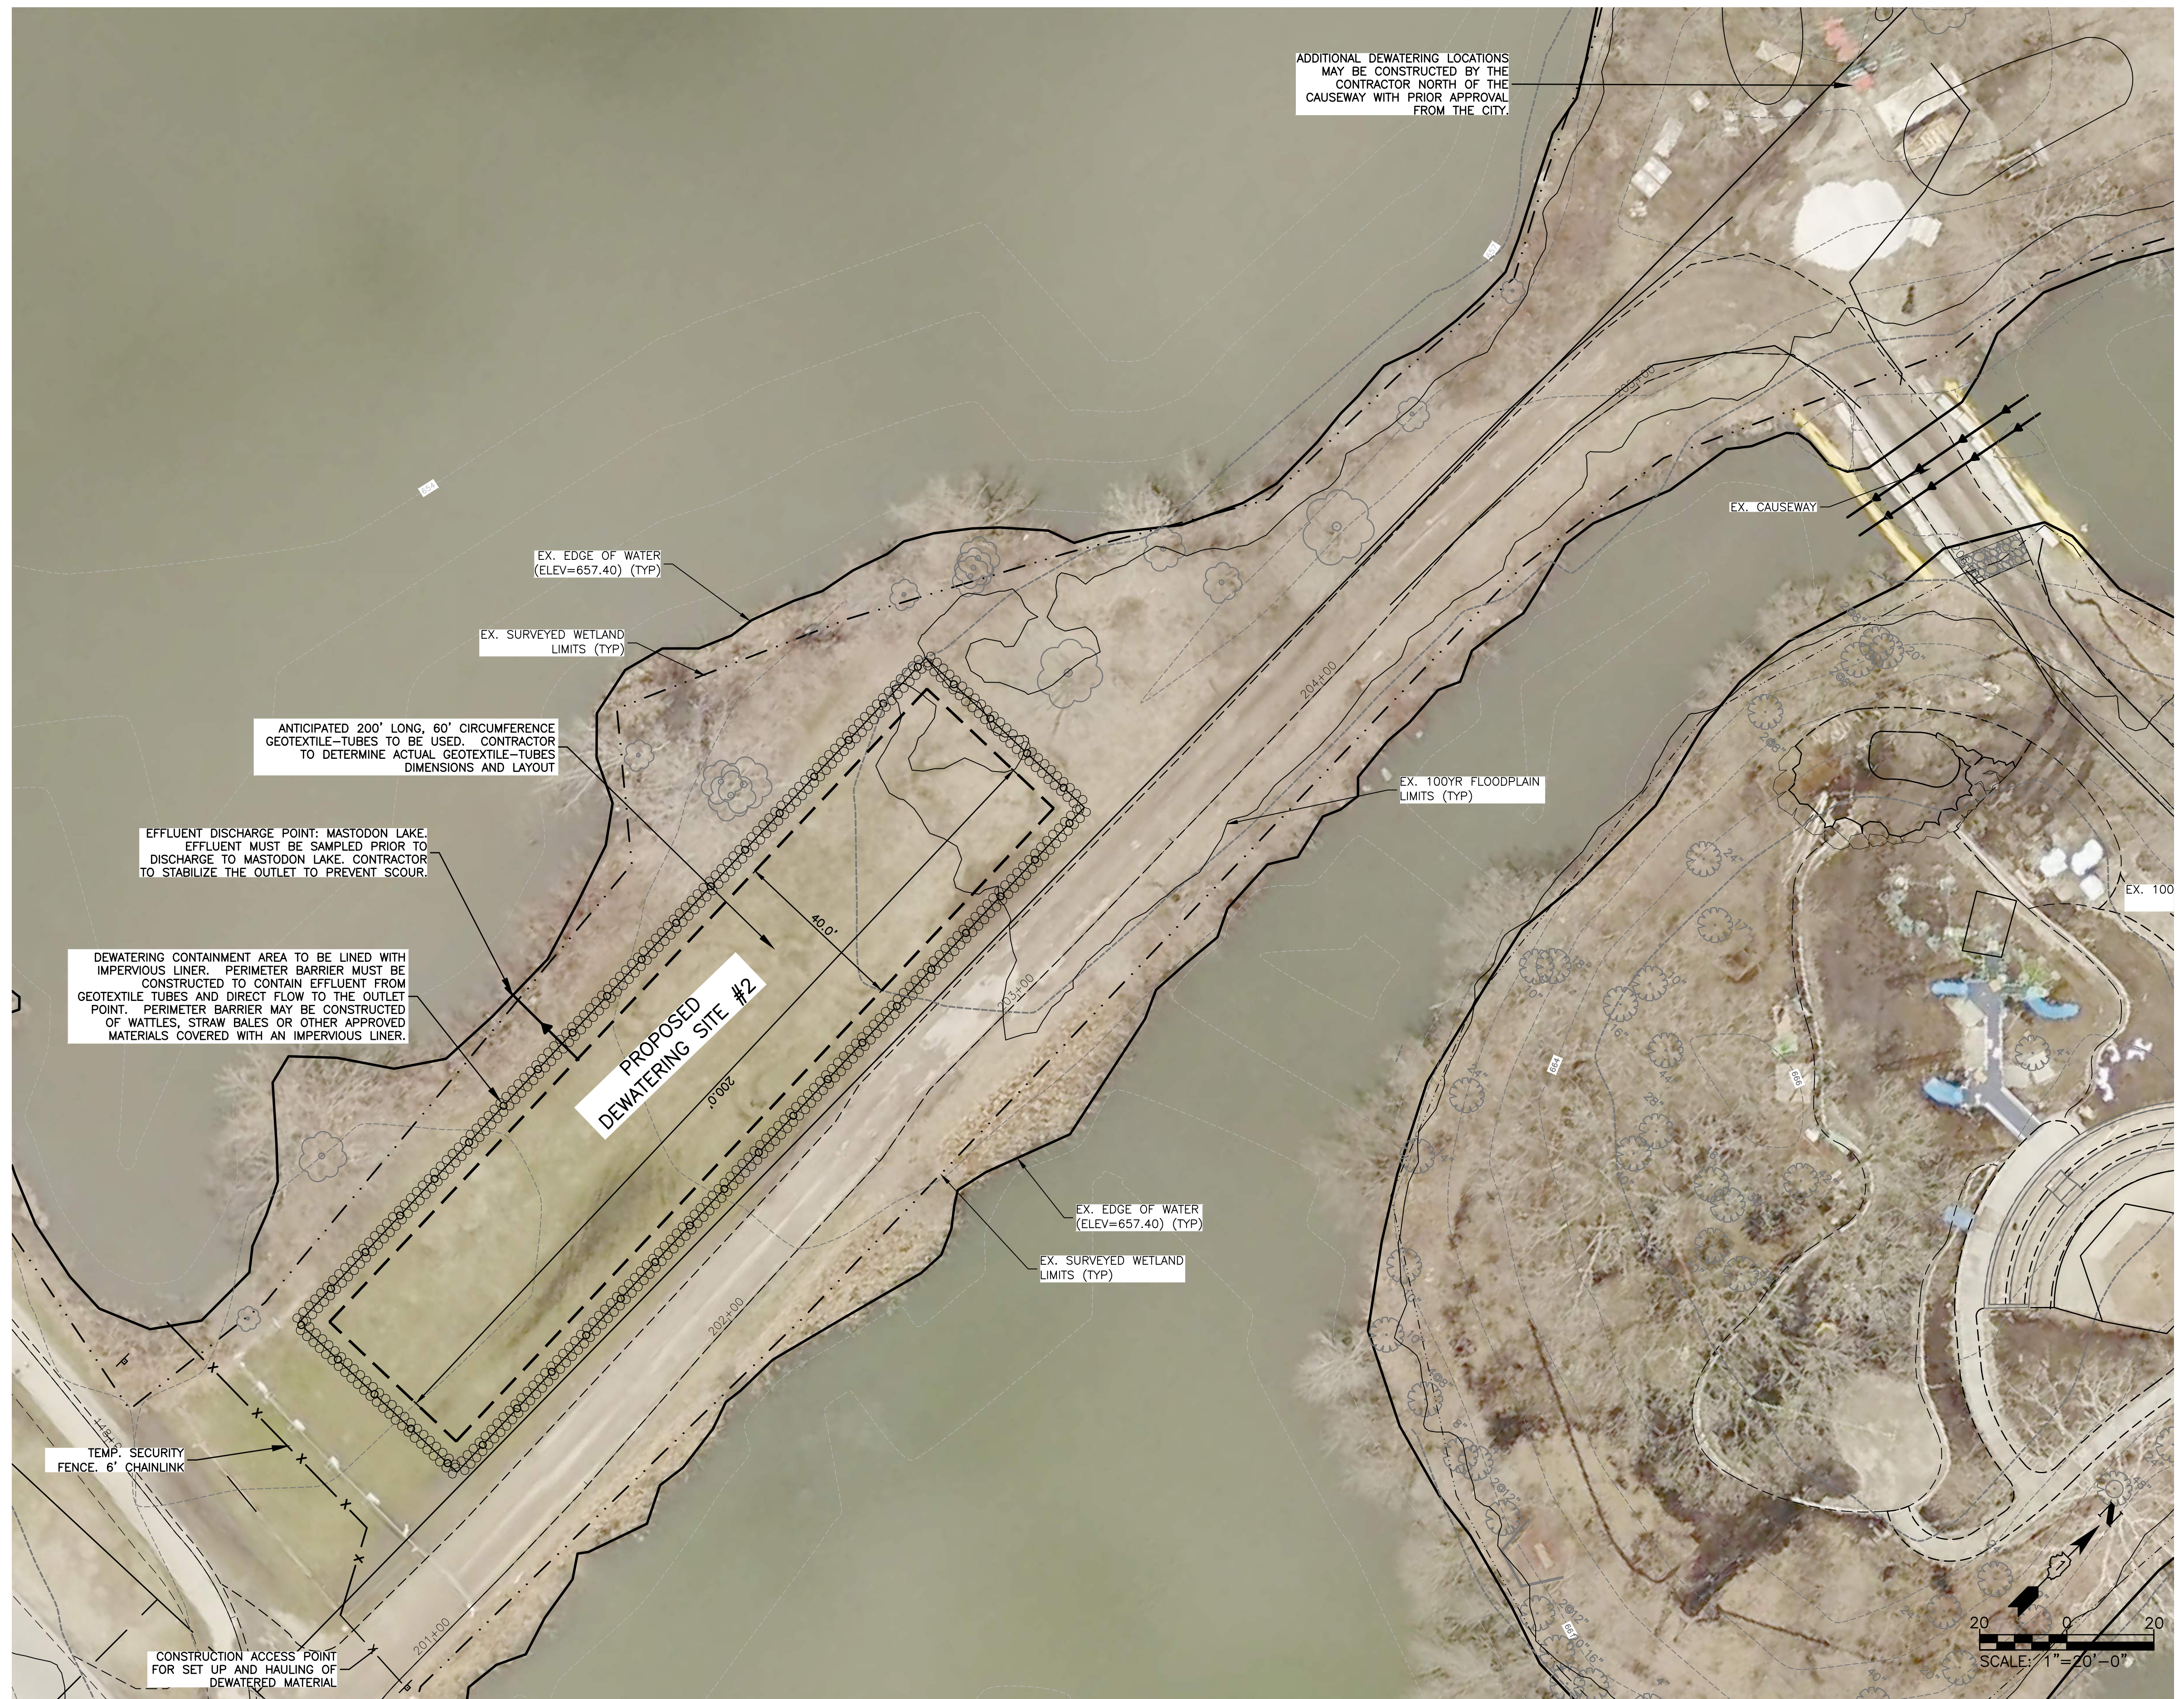

ADDITIONAL DEWATERING LOCATIONS MAY BE CONSTRUCTED BY THE CONTRACTOR NORTH OF THE CAUSEWAY WITH PRIOR APPROVAL FROM THE CITY.

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen
 CLIENT: HRGreen
 DATE PLOTTED: 2/6/2026 3:21 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -


DESIGNED - LRG	REVISED -
DRAWN - MPL/RMY	REVISED -
CHECKED - LRG	REVISED -
DATE -	REVISED -

CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT

PROPOSED DEWATERING SITE LOCATION 2


SCALE: 1"=20' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	11
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

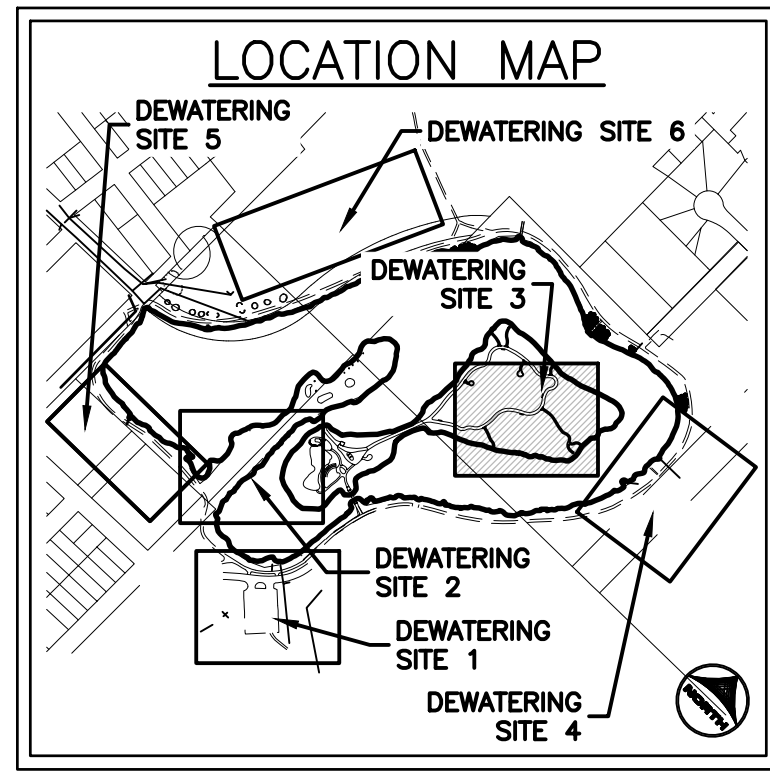

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- FILL AREAS ON THE ISLAND SHALL BE APPROVED BY THE CITY OR THE ENGINEER. RESTORATION OF FILL AREAS SHALL BE INCIDENTAL AND BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONSIST OF TURF GRASS SEED AND DS75 EROSION CONTROL BLANKET.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS.

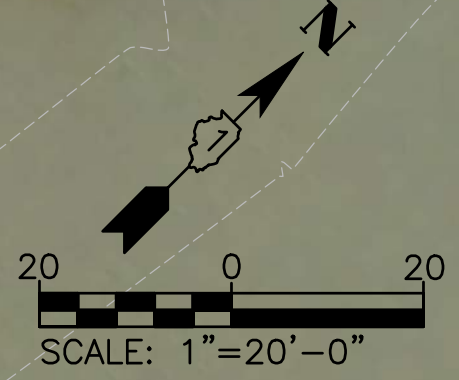

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:22 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT


PROPOSED DEWATERING SITE LOCATION 3		
SCALE: 1"=20'	SHEET NO. 01 OF 01 SHEETS	STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	12
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

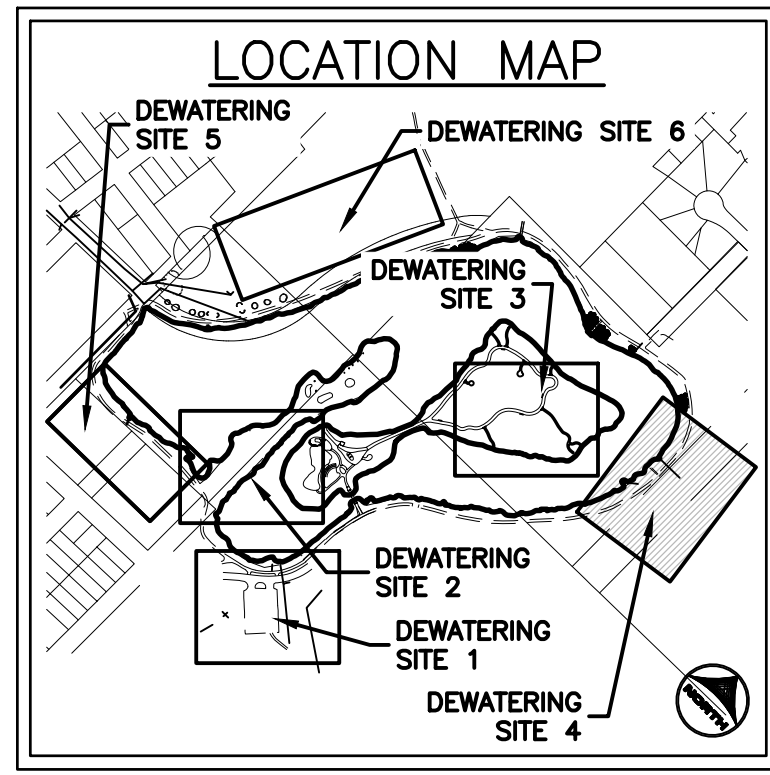

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- FILL AREAS ON THE ISLAND SHALL BE APPROVED BY THE CITY OR THE ENGINEER. RESTORATION OF FILL AREAS SHALL BE INCIDENTAL AND BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONSIST OF TURF GRASS SEED AND DS75 EROSION CONTROL BLANKET.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS

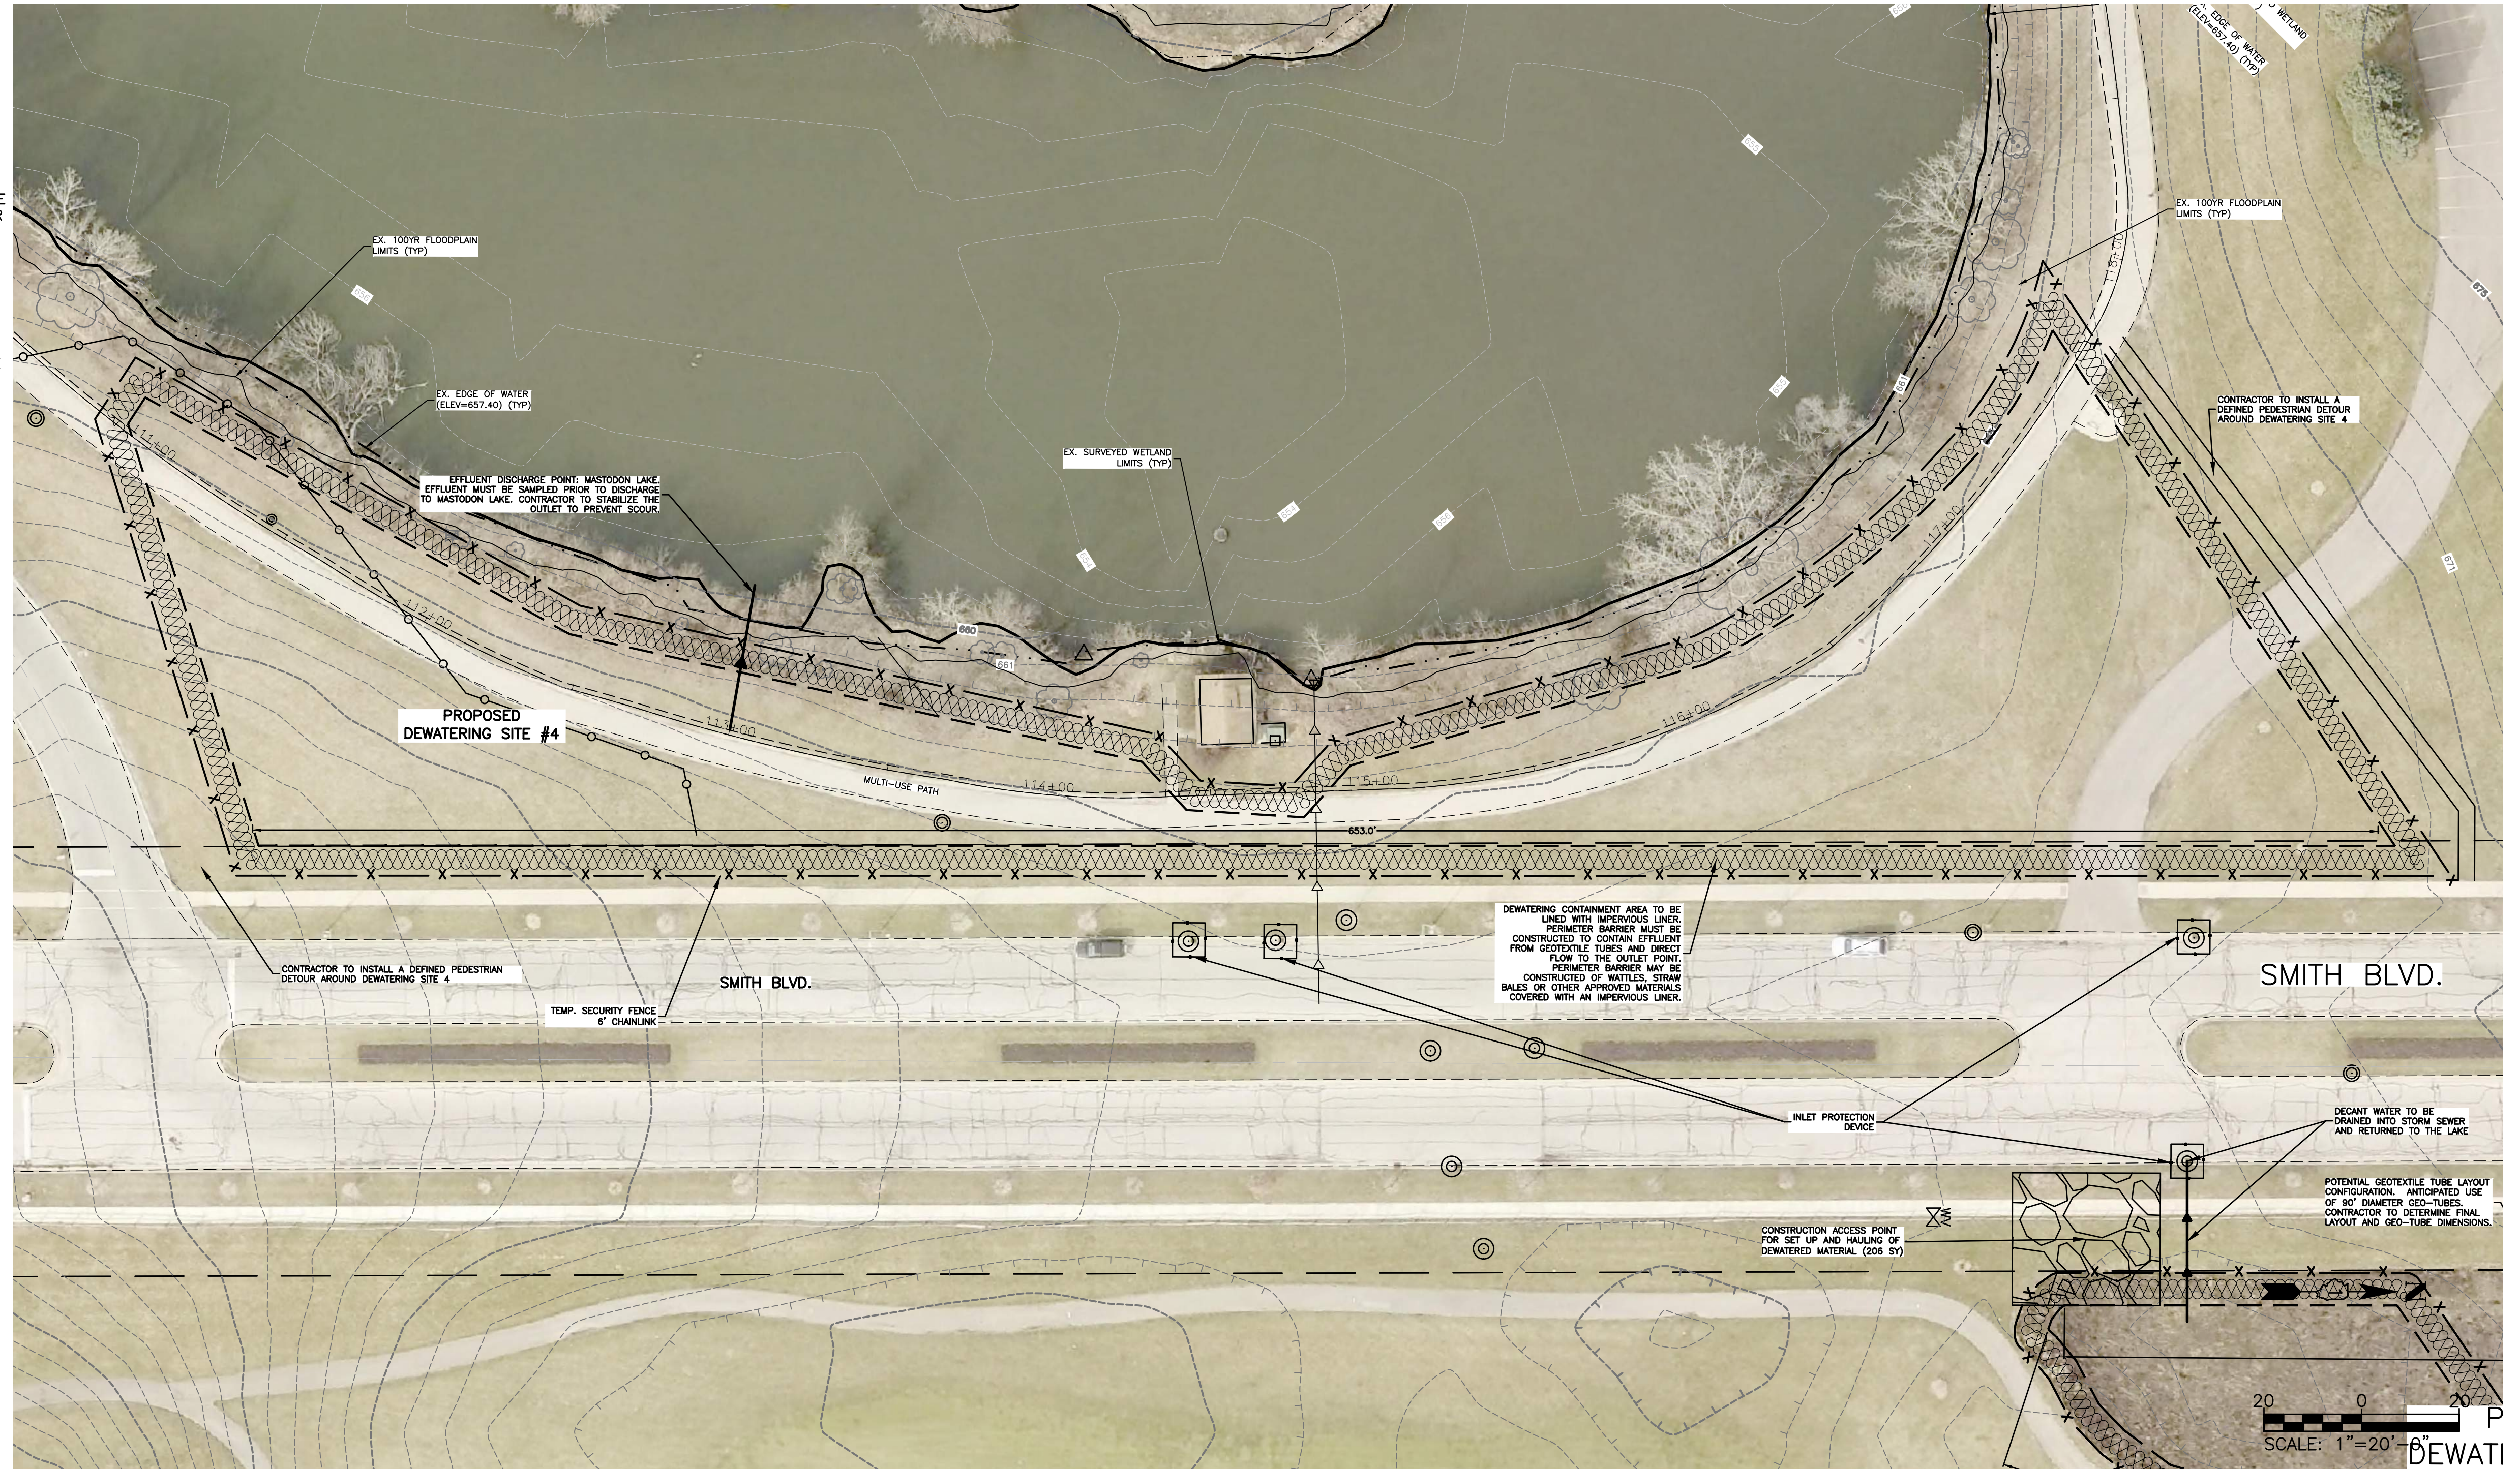

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:22 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -


CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT

PROPOSED DEWATERING SITE LOCATION 4

SCALE: 1"=20' SHEET NO. 01 OF 01 SHEETS STA. TO STA.


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	13
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				



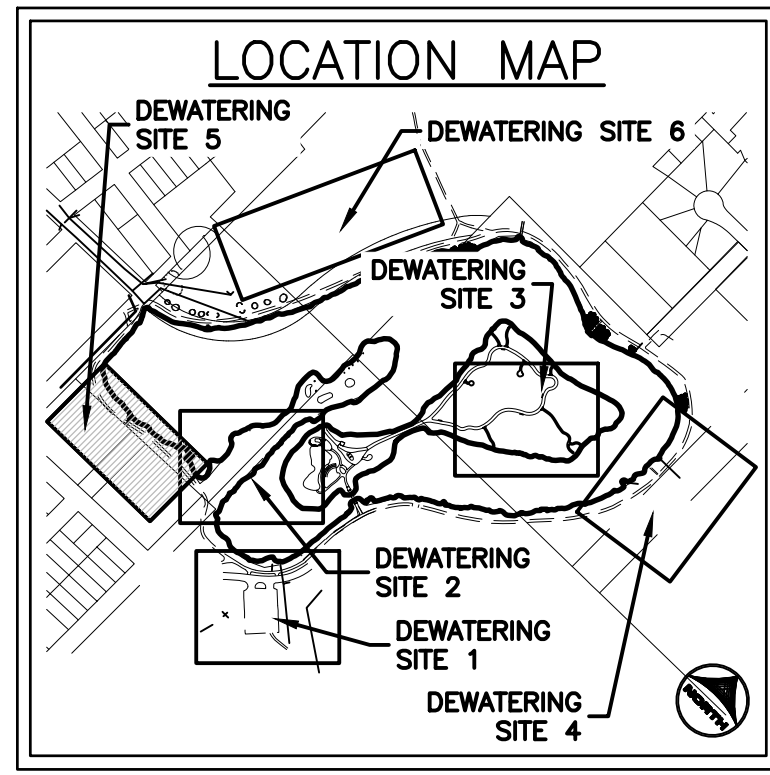

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- FILL AREAS ON THE ISLAND SHALL BE APPROVED BY THE CITY OR THE ENGINEER. RESTORATION OF FILL AREAS SHALL BE INCIDENTAL AND BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONSIST OF TURF GRASS SEED AND DS75 EROSION CONTROL BLANKET.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS

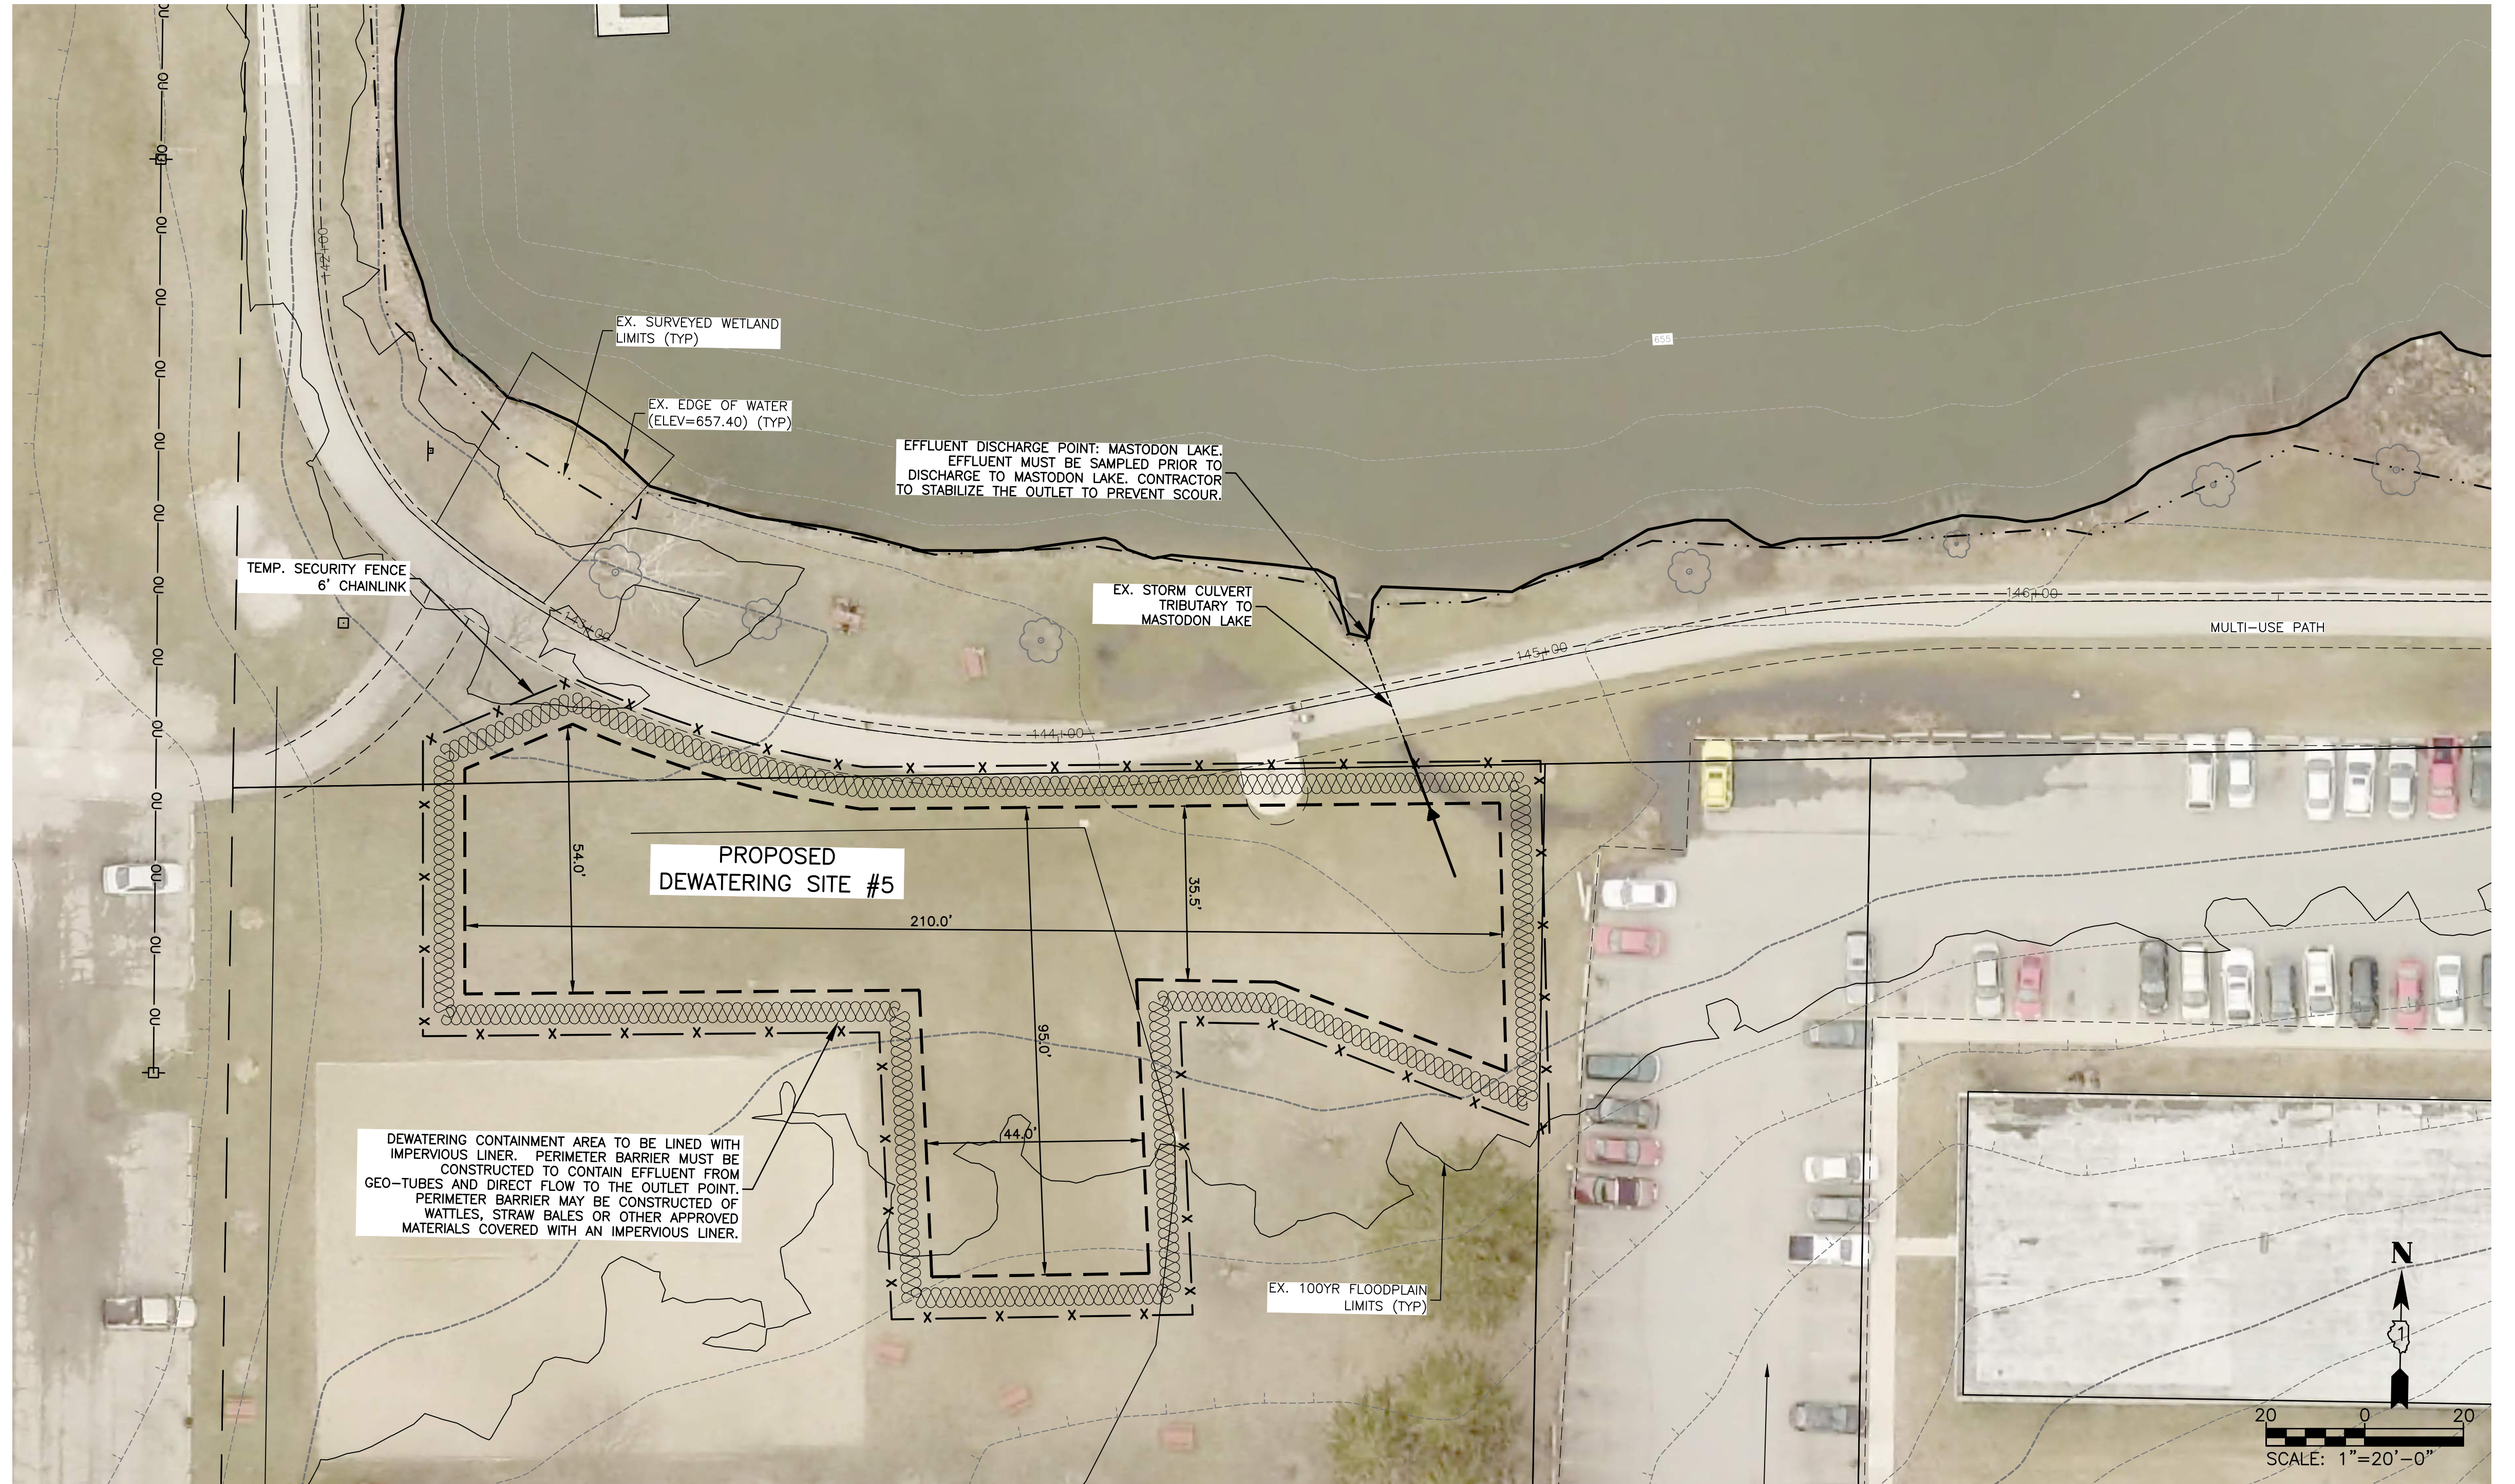

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: Robert Yerushalmi
 DATE PLOTTED: 2/6/2026 3:23 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
MASTODON LAKE DREDGING PROJECT**

PROPOSED DEWATERING SITE LOCATION 5

SCALE: 1"=20' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	14
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

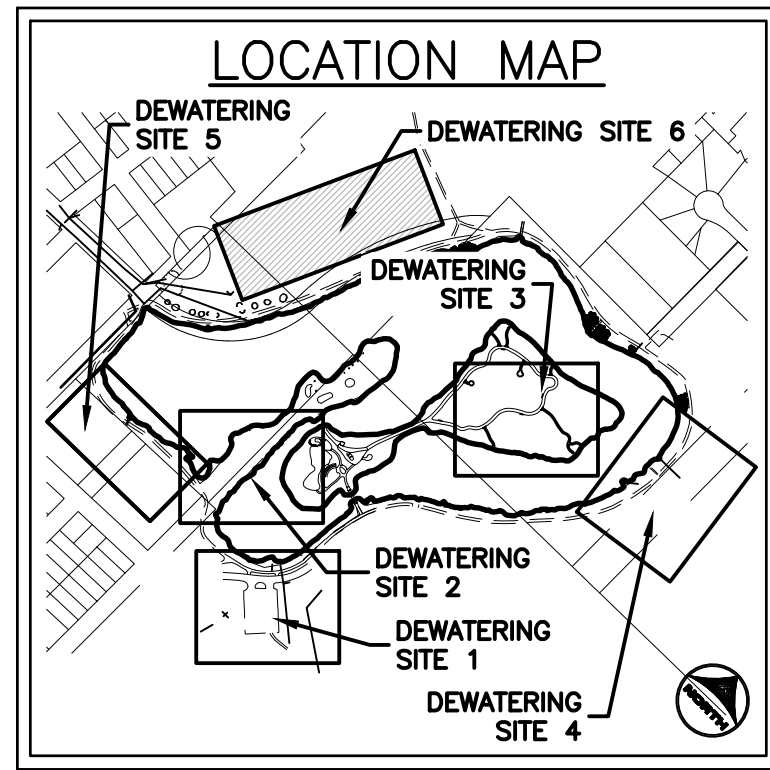


NOTES:


- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- FILL AREAS ON THE ISLAND SHALL BE APPROVED BY THE CITY OR THE ENGINEER. RESTORATION OF FILL AREAS SHALL BE INCIDENTAL AND BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONSIST OF TURF GRASS SEED AND DS75 EROSION CONTROL BLANKET.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS
- CONTRACTOR MUST MAINTAIN A 15' SEPARATION FROM THE SIDELINE OF THE EXISTING PRACTICE FIELD. NO MATERIALS OR MACHINERY MAY ENTER THE 15' BUFFER OF THE FIELD.

DEWATERING SITE #6 NOTES:

- THE CITY WILL COORDINATE WITH THE ADJACENT PROPERTY OWNER FOR USE OF DEWATERING SITE #6. THE USE OF SITE #6 IS CONTINGENT UPON APPROVAL FROM THE PROPERTY OWNER. THE USE OF THIS PROPERTY IS CURRENTLY NOT GUARANTEED TO THE CONTRACTOR.

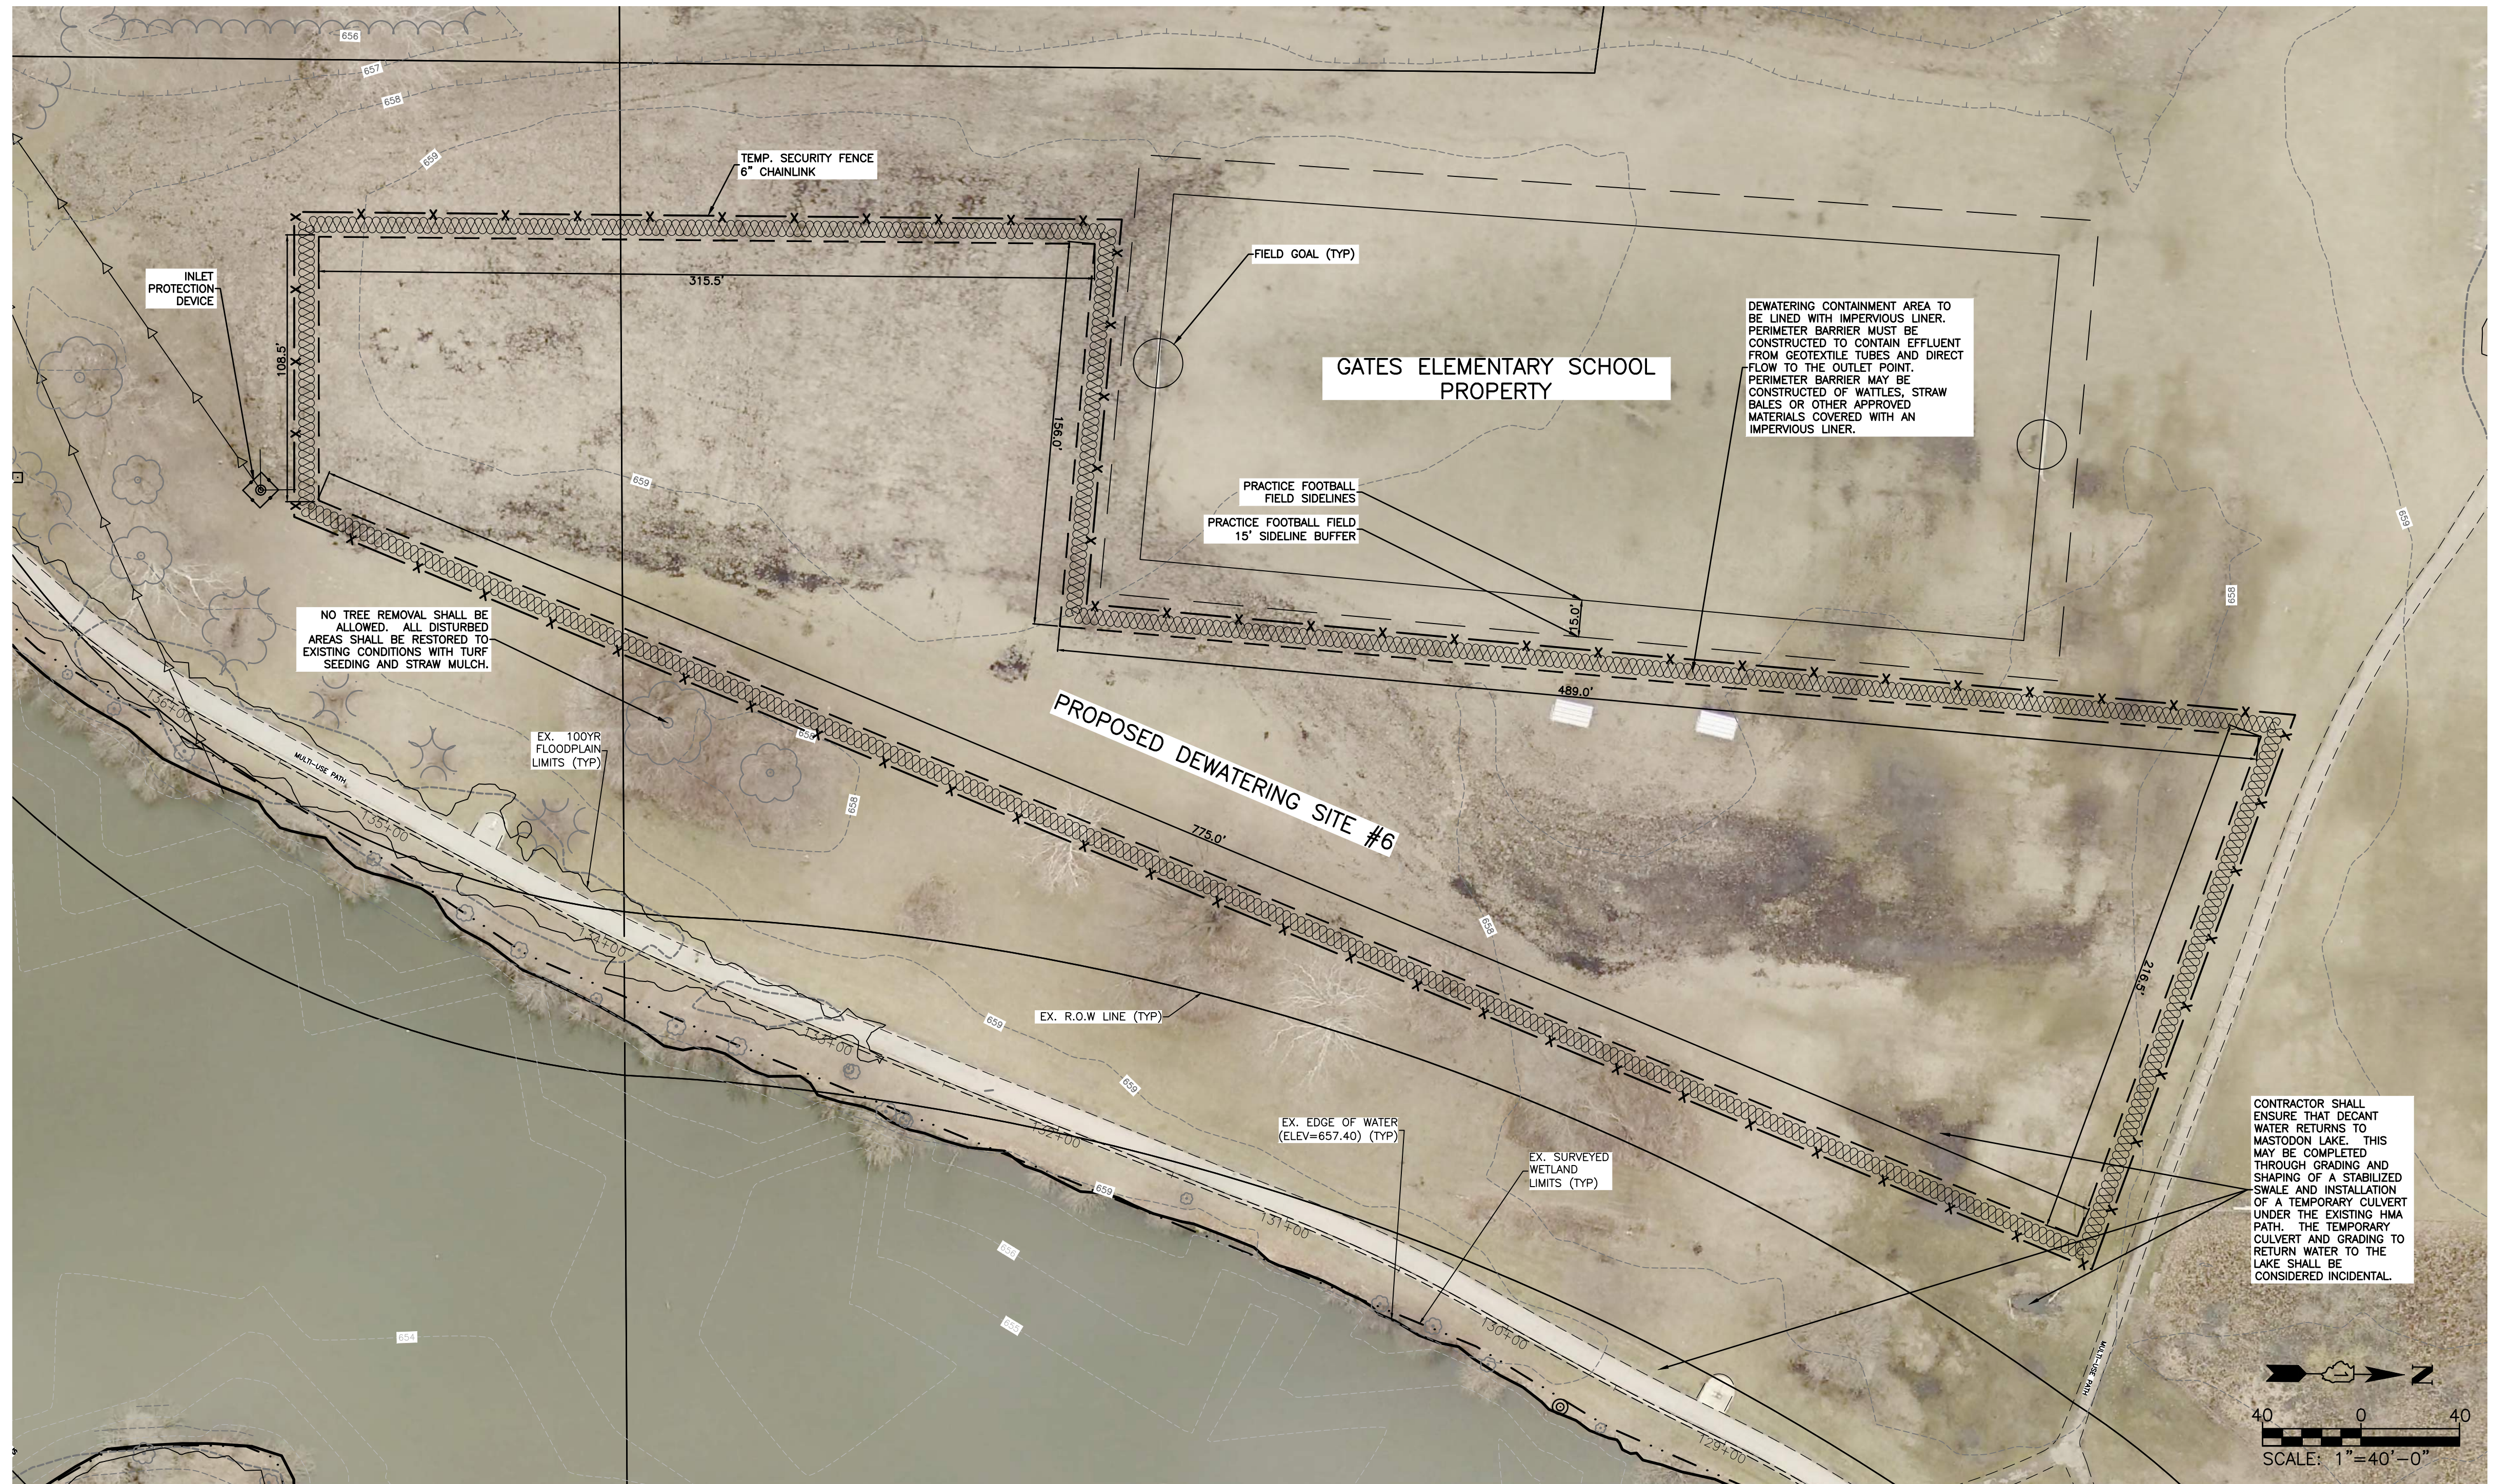

CONTRACTOR SHALL ENSURE THAT DECANT WATER RETURNS TO MASTODON LAKE. THIS MAY BE COMPLETED THROUGH GRADING AND SHAPING OF A STABILIZED SWALE AND INSTALLATION OF A TEMPORARY CULVERT UNDER THE EXISTING HMA PATH. THE TEMPORARY CULVERT AND GRADING TO RETURN WATER TO THE LAKE SHALL BE CONSIDERED INCIDENTAL.



COMPANY NAME: HRGreen.com
 PROJECT CONTACT: Robert Yerushalmi
 DATE PLOTTED: 2/6/2026 3:23 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=20'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT**

PROPOSED DEWATERING SITE LOCATION 6		
SCALE: 1"=20'	SHEET NO. 01 OF 01 SHEETS	STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	15
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

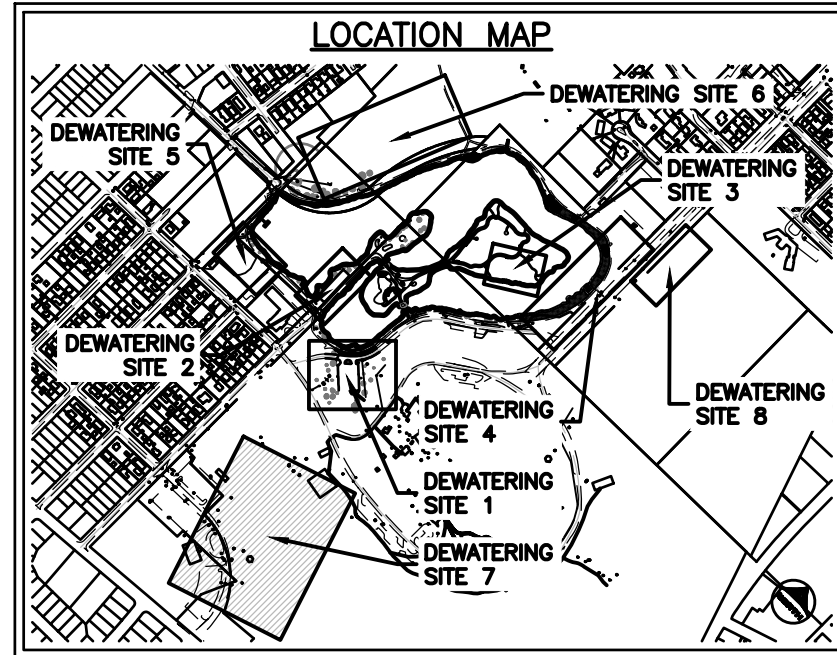

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- DEWATERING AREA TO ALSO BE A PROPOSED STOCKPILE LOCATION. COMPLETE RESTORATION OF STOCKPILE FILL IS OUTLINED IN THE DETAILED STOCKPILE LOCATION MAP FOR THIS RESPECTIVE AREA.
- ALL TREES ARE TO REMAIN. NO EQUIPMENT MAY OPERATE WITHIN THE DRIP LINE OF THE EXISTING TREES.
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND THE DEWATERING LOCATION IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS.
- DEWATERING SITE #7 MUST BE UTILIZED AS THE PRIMARY DEWATERING SITE AND USED TO THE MAXIMUM EXTENT PRACTICABLE BY THE CONTRACTOR. THIS SITE MUST BE PRIORITIZED TO MAXIMIZE THE USE OF THE SPACE AVAILABLE FOR DEWATERING AND REDUCE HAULING OF DEWATERED MATERIALS.



COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 CLIENT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:24 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=60'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT**

PROPOSED DEWATERING SITE LOCATION 7


SCALE: 1"=60' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	16
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

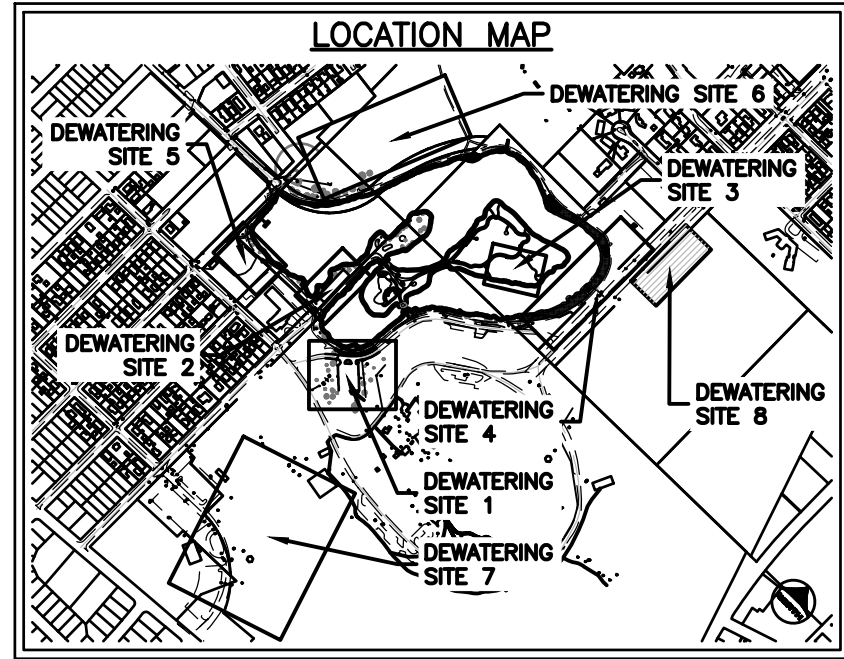

NOTES:

- CONTRACTOR TO COMPLETE BENCH TESTING WITH THE SUPERNATE SAMPLES TO DEMONSTRATE THAT A 15MG/L TSS IS BEING MET FOR THE CHOSEN FLOCCULANT AND GEOTEXTILE BAG MATERIAL. DATA MUST BE SUBMITTED TO THE IEPA PRIOR TO USE.
- CONTRACTOR TO PROVIDE MSDS DATA FOR PROPOSED FLOCCULANTS TO THE IEPA AND CITY FOR APPROVAL PRIOR TO USE.
- CONTRACTOR TO REVIEW GROUND CONDITIONS FOR SLOPE AND OBSTACLES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE GEOTEXTILE TUBES ARE SECURE AND NOT SUSCEPTIBLE TO ROLLING OR RUPTURE. CONTRACTOR SHALL DETERMINE IF SHIMS OR OTHER MEASURES OF SECURING THE GEOTEXTILE TUBES IS WARRANTED.
- FILL AREAS ON THE ISLAND SHALL BE APPROVED BY THE CITY OR THE ENGINEER. RESTORATION OF FILL AREAS SHALL BE INCIDENTAL AND BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONSIST OF TURF GRASS SEED AND DS75 EROSION CONTROL BLANKET.
- ALL TREES ARE TO REMAIN
- TEMPORARY STABILIZED CONSTRUCTION ACCESS FOR HAULING WILL BE NECESSARY IF TRUCKING OVER UNPAVED AREAS.
- TEMPORARY DITCH CHECKS SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AND/OR SWCD AROUND MASTODON LAKE IN AREAS OF CONCENTRATED RUNOFF FROM STABILIZED AREAS AND CONSTRUCTION ACCESS POINTS

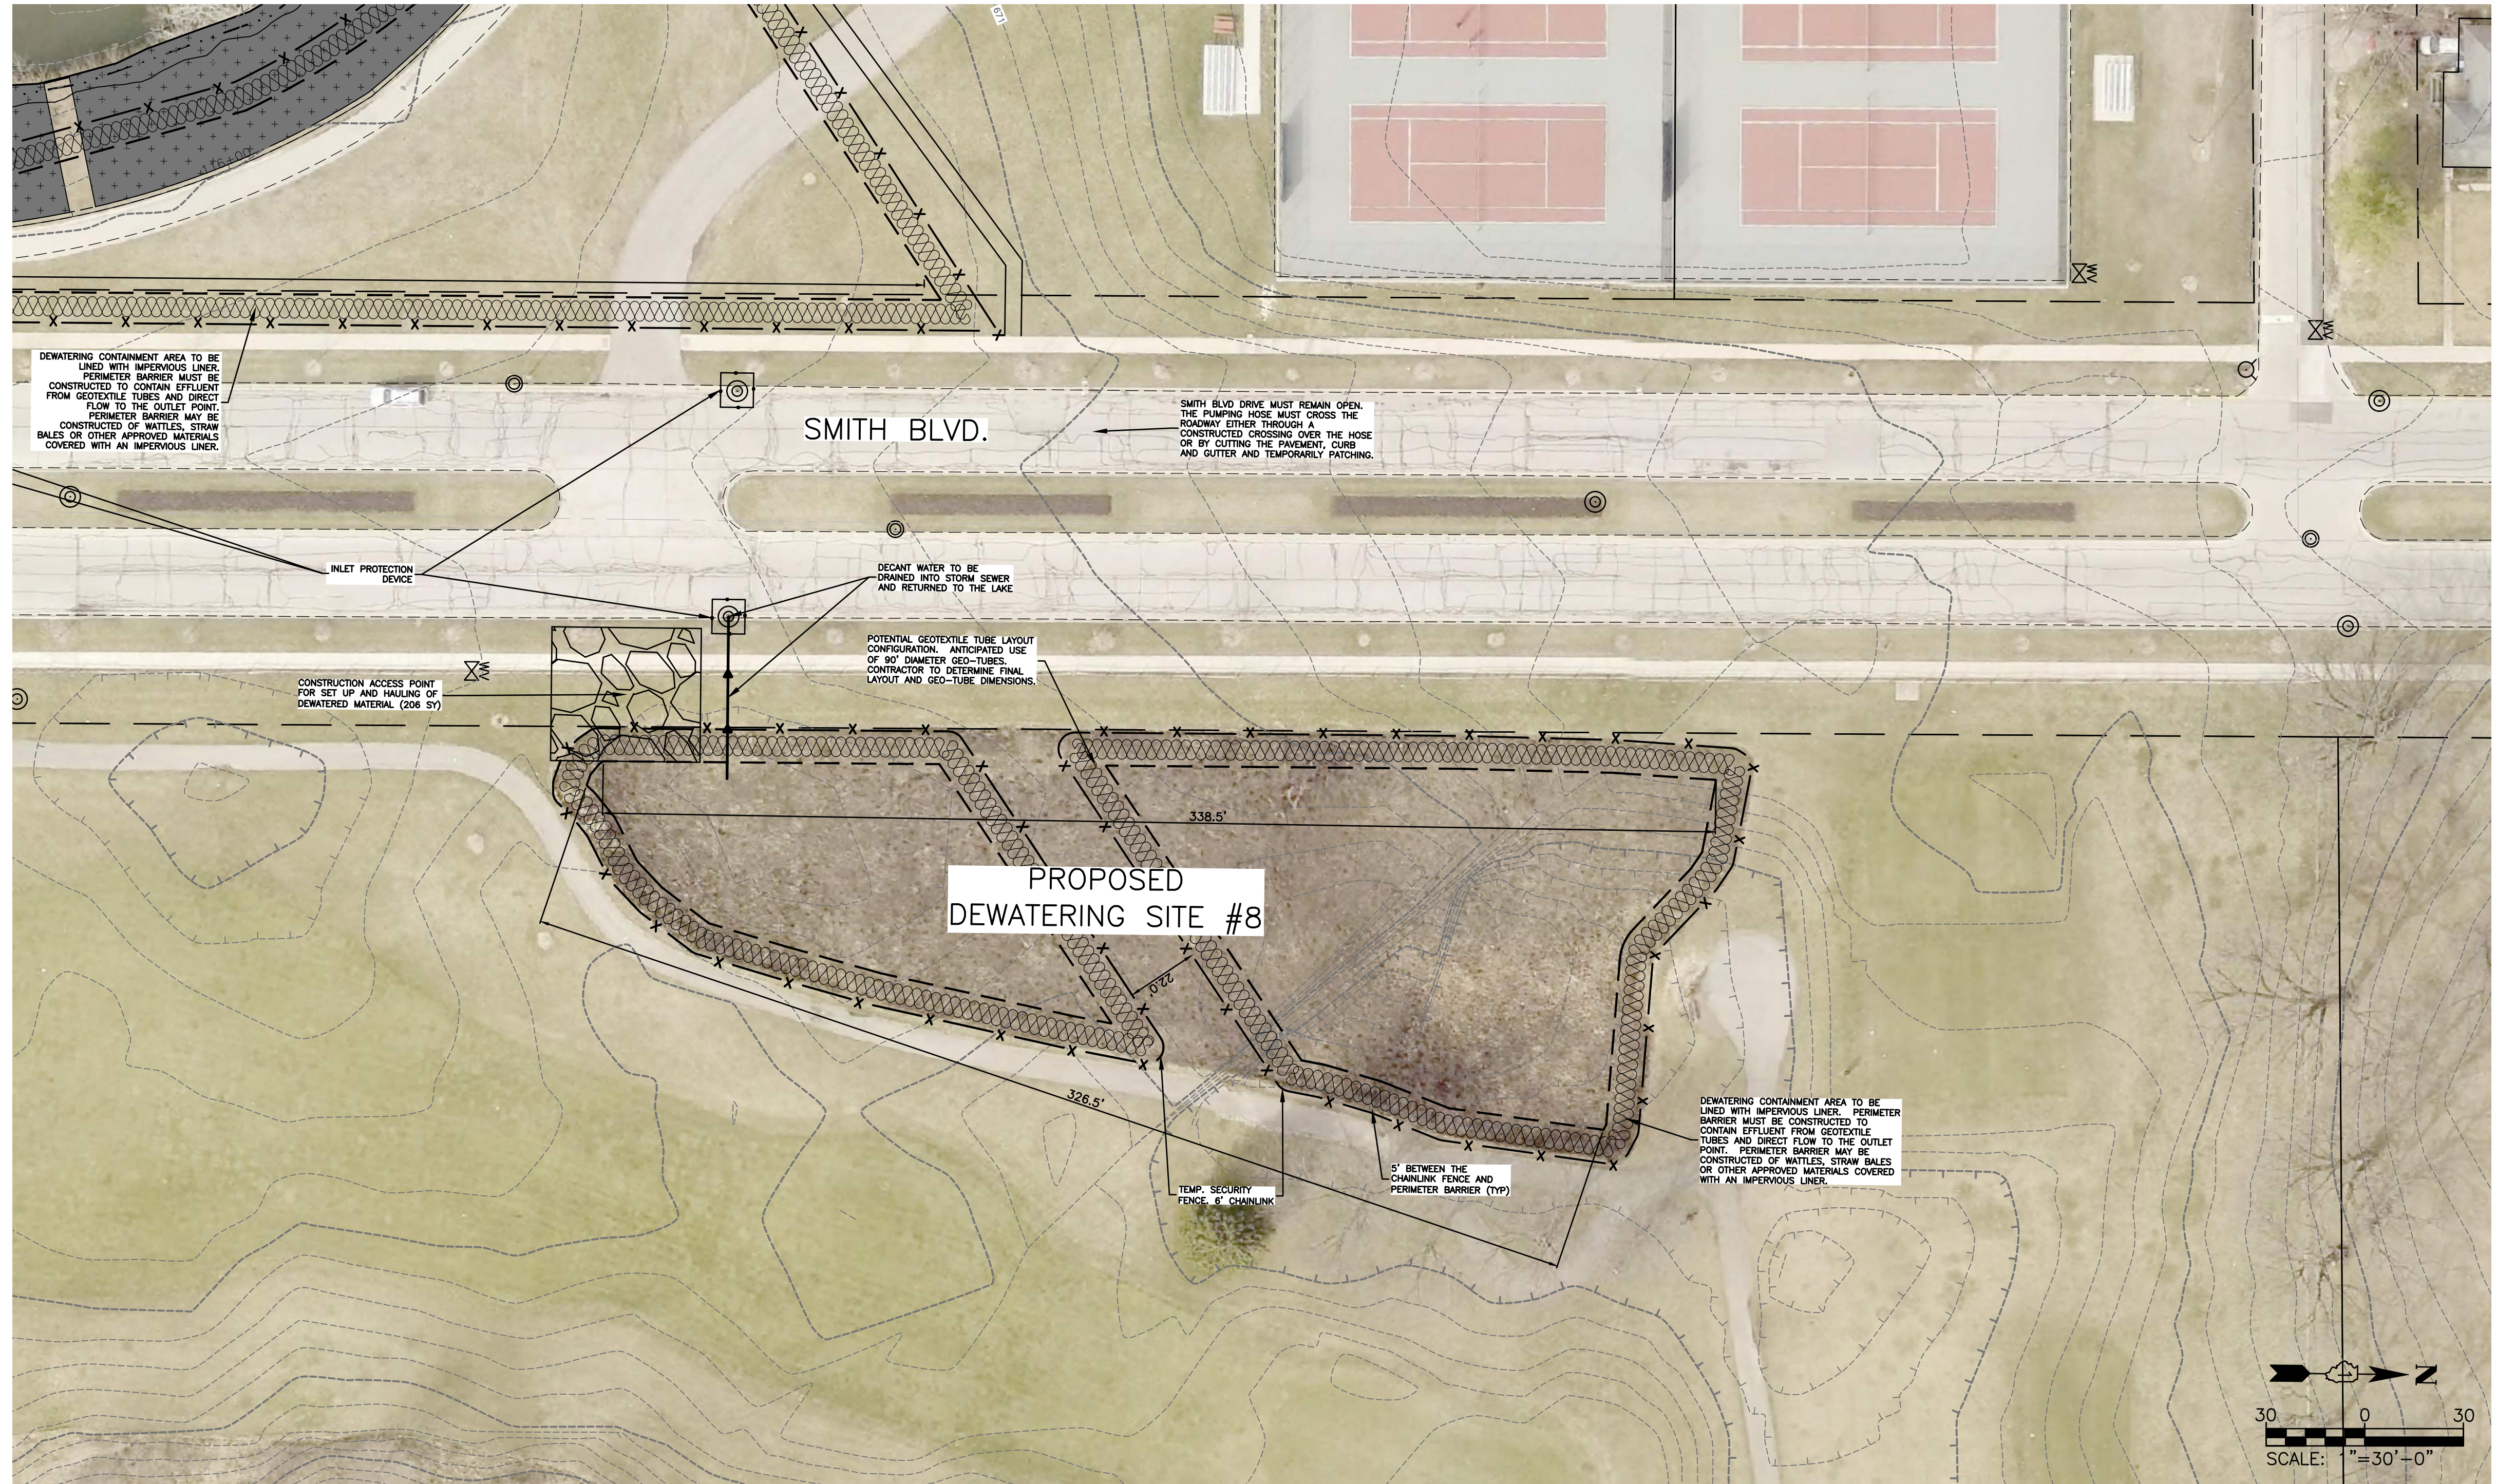

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:24 PM
 FILE NAME: 191806-Detailed-Dewatering-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Dewatering-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=30'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT**

PROPOSED DEWATERING SITE LOCATION 8

SCALE: 1"=30' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	17
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

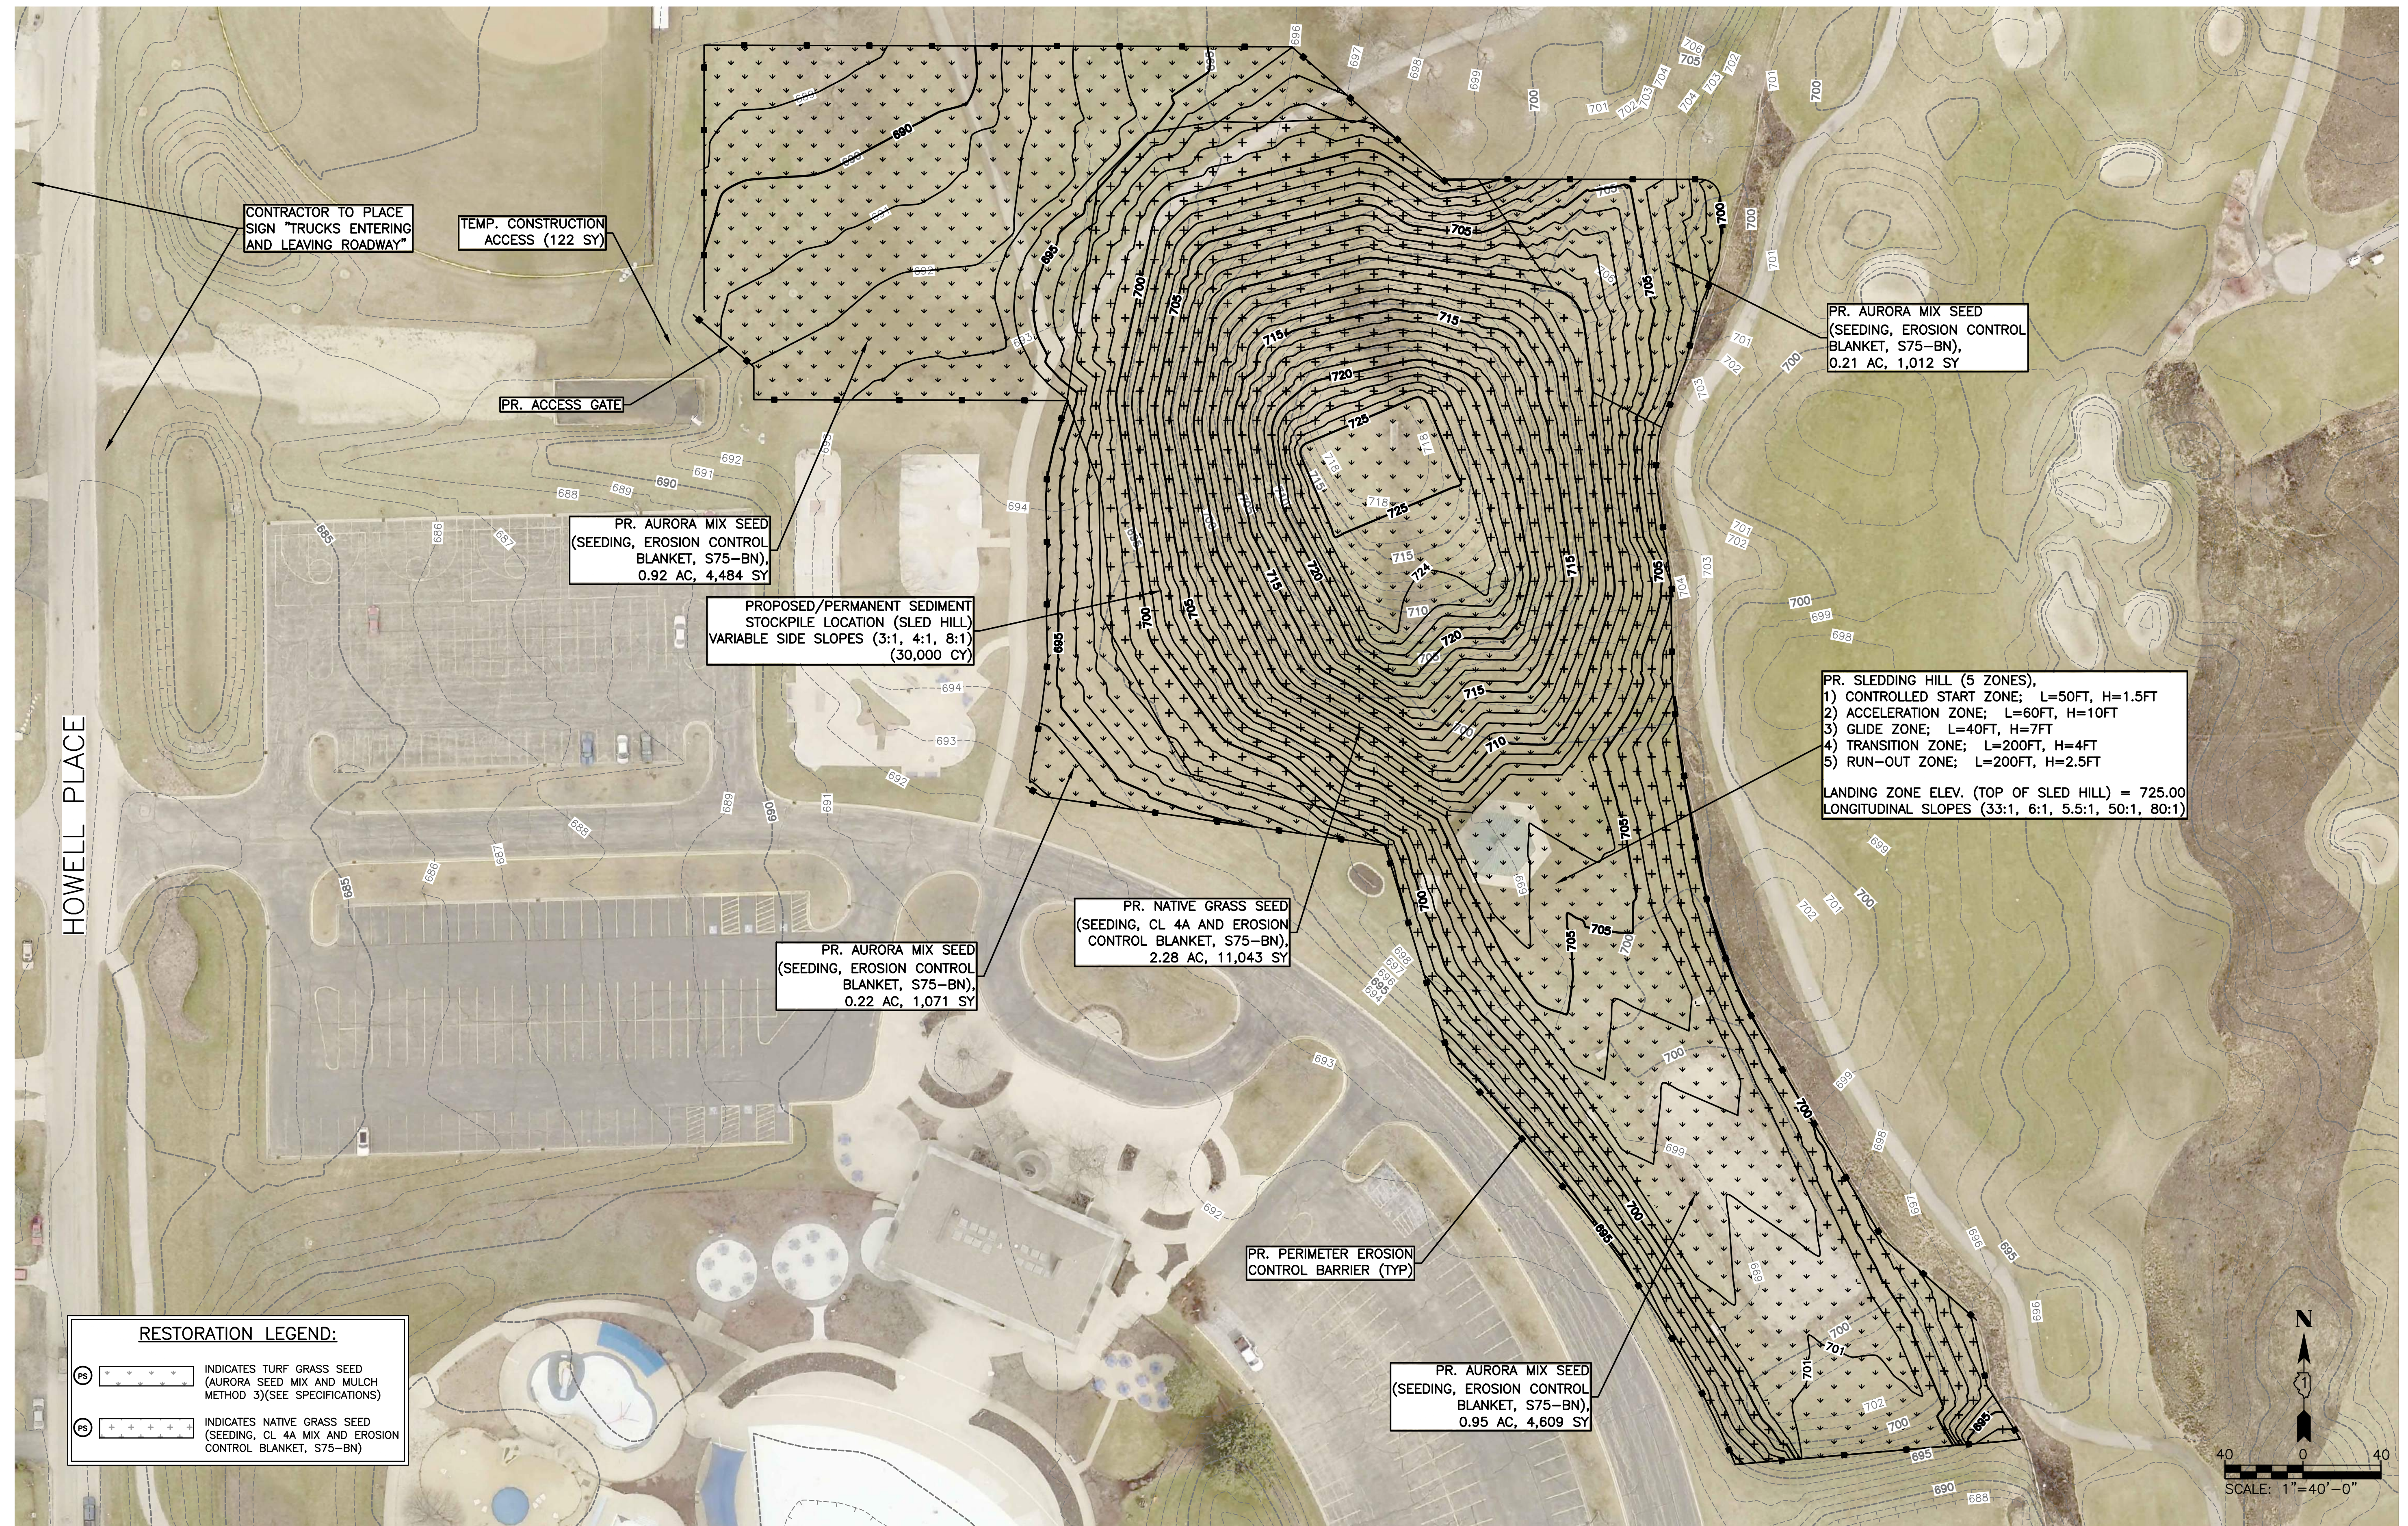

CONTRACTOR TO PLACE SIGN "TRUCKS ENTERING AND LEAVING ROADWAY"

TEMP. CONSTRUCTION ACCESS (122 SY)

PR. ACCESS GATE

PR. AURORA MIX SEED (SEEDING, EROSION CONTROL BLANKET, S75-BN), 0.92 AC, 4,484 SY

PROPOSED/PERMANENT SEDIMENT STOCKPILE LOCATION (SLED HILL) VARIABLE SIDE SLOPES (3:1, 4:1, 8:1) (30,000 CY)

PR. AURORA MIX SEED (SEEDING, EROSION CONTROL BLANKET, S75-BN), 0.22 AC, 1,071 SY

PR. NATIVE GRASS SEED (SEEDING, CL 4A AND EROSION CONTROL BLANKET, S75-BN), 2.28 AC, 11,043 SY

PR. PERIMETER EROSION CONTROL BARRIER (TYP)

PR. AURORA MIX SEED (SEEDING, EROSION CONTROL BLANKET, S75-BN), 0.95 AC, 4,609 SY

PR. AURORA MIX SEED (SEEDING, EROSION CONTROL BLANKET, S75-BN), 0.21 AC, 1,012 SY

PR. SLEDDING HILL (5 ZONES),
 1) CONTROLLED START ZONE; L=50FT, H=1.5FT
 2) ACCELERATION ZONE; L=60FT, H=10FT
 3) GLIDE ZONE; L=40FT, H=7FT
 4) TRANSITION ZONE; L=200FT, H=4FT
 5) RUN-OUT ZONE; L=200FT, H=2.5FT
 LANDING ZONE ELEV. (TOP OF SLED HILL) = 725.00
 LONGITUDINAL SLOPES (33:1, 6:1, 5.5:1, 50:1, 80:1)

RESTORATION LEGEND:

(S)	INDICATES TURF GRASS SEED (AURORA SEED MIX AND MULCH METHOD 3)(SEE SPECIFICATIONS)
(N)	INDICATES NATIVE GRASS SEED (SEEDING, CL 4A MIX AND EROSION CONTROL BLANKET, S75-BN)

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: Robert Yerushalmi
 DATE PLOTTED: 2/6/2026 3:24 PM
 CLIENT: City of Aurora
 FILE NAME: 191806-Detailed-Stockpile-Grading-Sled-Hill-Golf-Course
 DWG TO PDF: pc3
 PLOT DRIVER: ILDOT-Standard.ctb
 PEN TABLE:




USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Stockpile-Grading-Sled-Hill-Golf-Course	CHECKED - LRG	REVISED -
PLOT SCALE = 1"=40'	DATE -	REVISED -
PLOT DATE = 2/6/2026		

**CITY OF AURORA
 MASTODON LAKE DREDGING PROJECT**

DETAILED STOCKPILE LOCATION PLAN - SLED HILL


SCALE: 1"=40' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	18
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

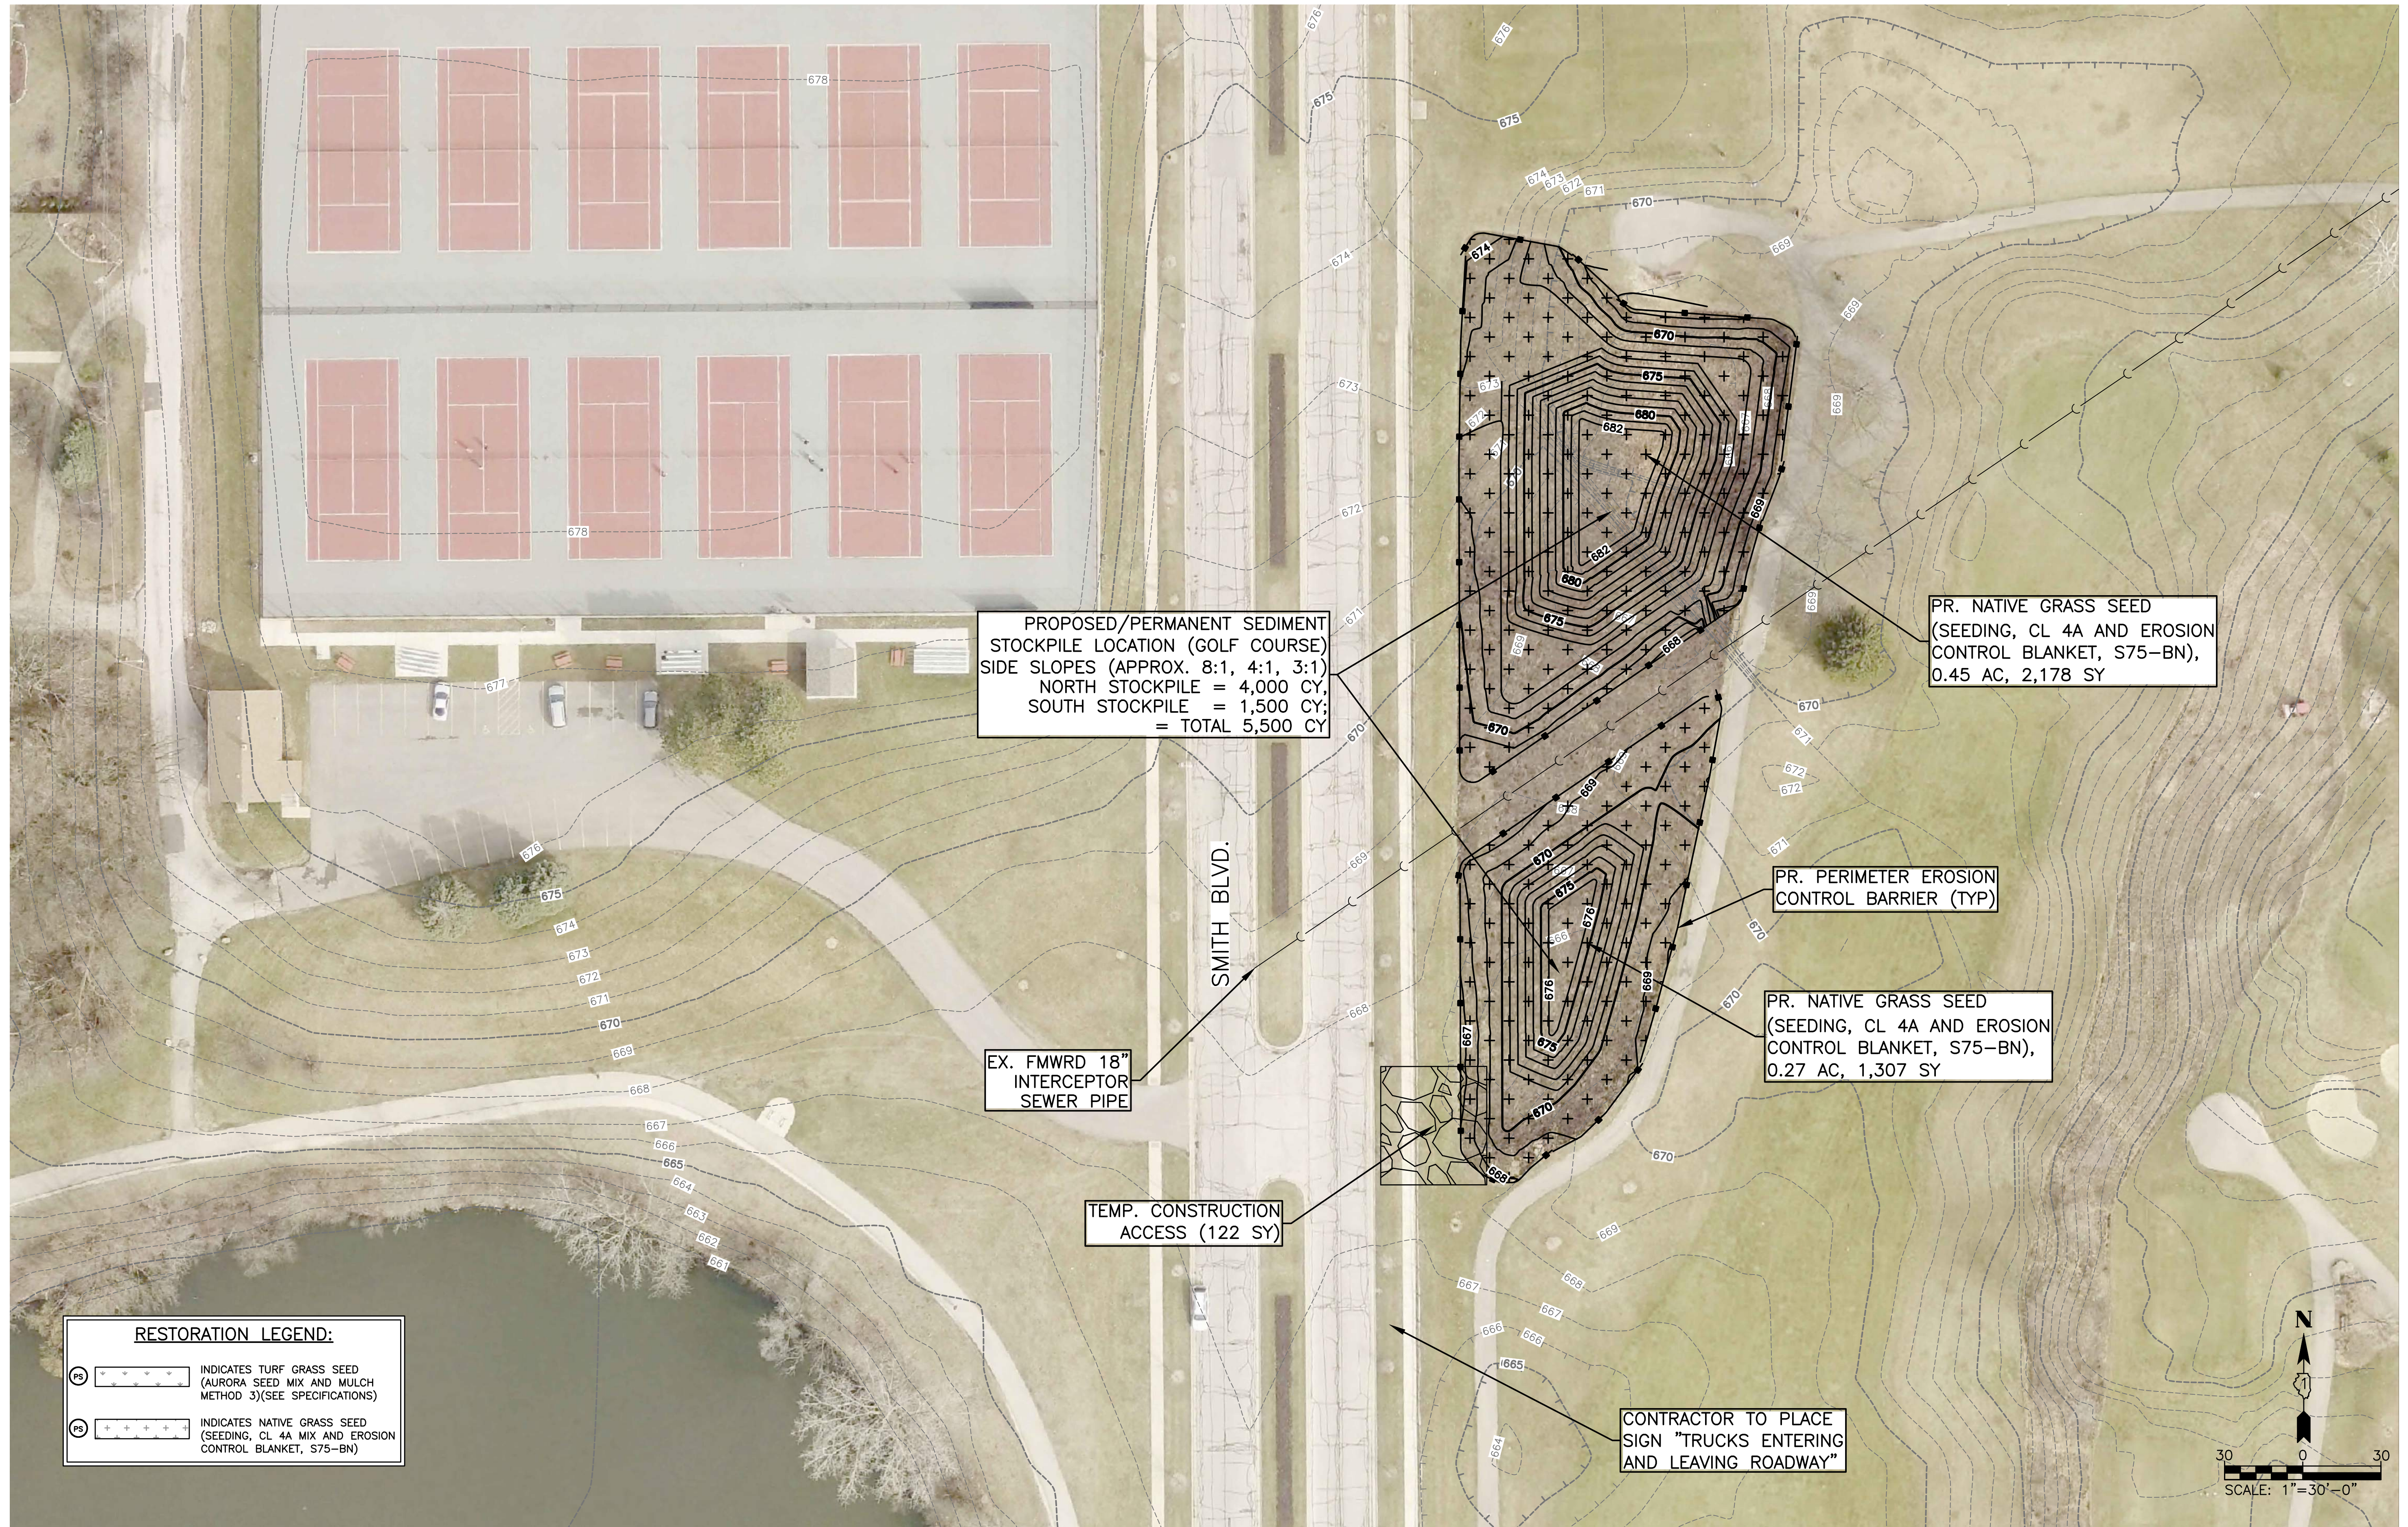

RESTORATION LEGEND:

	INDICATES TURF GRASS SEED (AURORA SEED MIX AND MULCH METHOD 3)(SEE SPECIFICATIONS)
	INDICATES NATIVE GRASS SEED (SEEDING, CL 4A MIX AND EROSION CONTROL BLANKET, S75-BN)

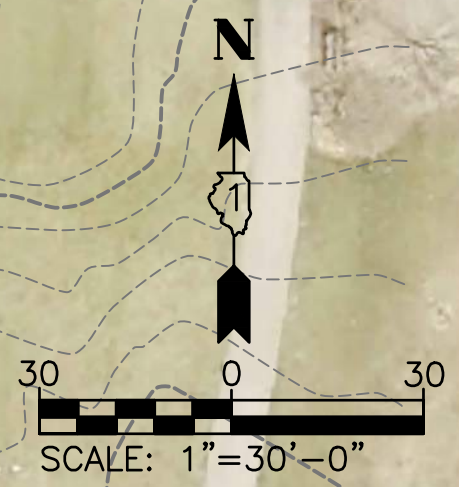

COMPANY NAME: HRGreen
 PROJECT CONTACT: HRGreen
 DATE PLOTTED: 2/6/2026 3:24 PM
 CLIENT: 191806-Detailed-Stockpile-Grading-Sited-Hill-Golf-Course
 FILE NAME: 191806-Detailed-Stockpile-Grading-Sited-Hill-Golf-Course
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Stockpile-Grading-Sited-Hill-Golf-Course	DRAWN - MURPHY	REVISED -
PLOT SCALE = 1"=30'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

DETAILED STOCKPILE LOCATION PLAN - GOLF COURSE
 SCALE: 1"=30' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	19
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				



COMPANY NAME: HRGreen.com
 PROJECT CONTACT: Robert Yerushalmi
 DATE PLOTTED: 2/6/2026 3:25 PM
 FILE NAME: 191806-Detailed-Stockpile-Truck-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Detailed-Stockpile-Truck-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=200'	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

OVERALL PROPOSED TRUCK ROUTING PLAN



SCALE: 1"=200' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	20
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

**PRECAST BLOCK REVETMENT
MAT DETAIL**

BLOCKS SHALL BE INSTALLED PER MANUFACTURERS RECOMMENDATIONS

- AREAS FOR MAT TO BE INSTALLED
 1. PROPOSED CANOE LAUNCH
 2. CAUSEWAY

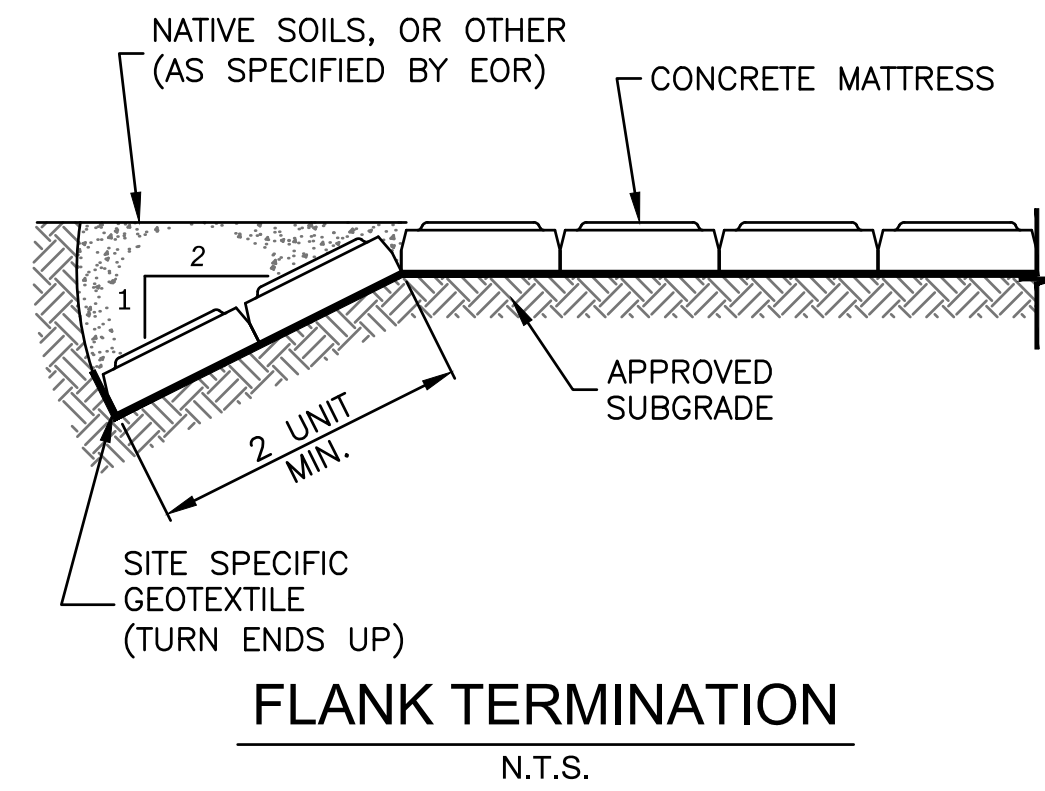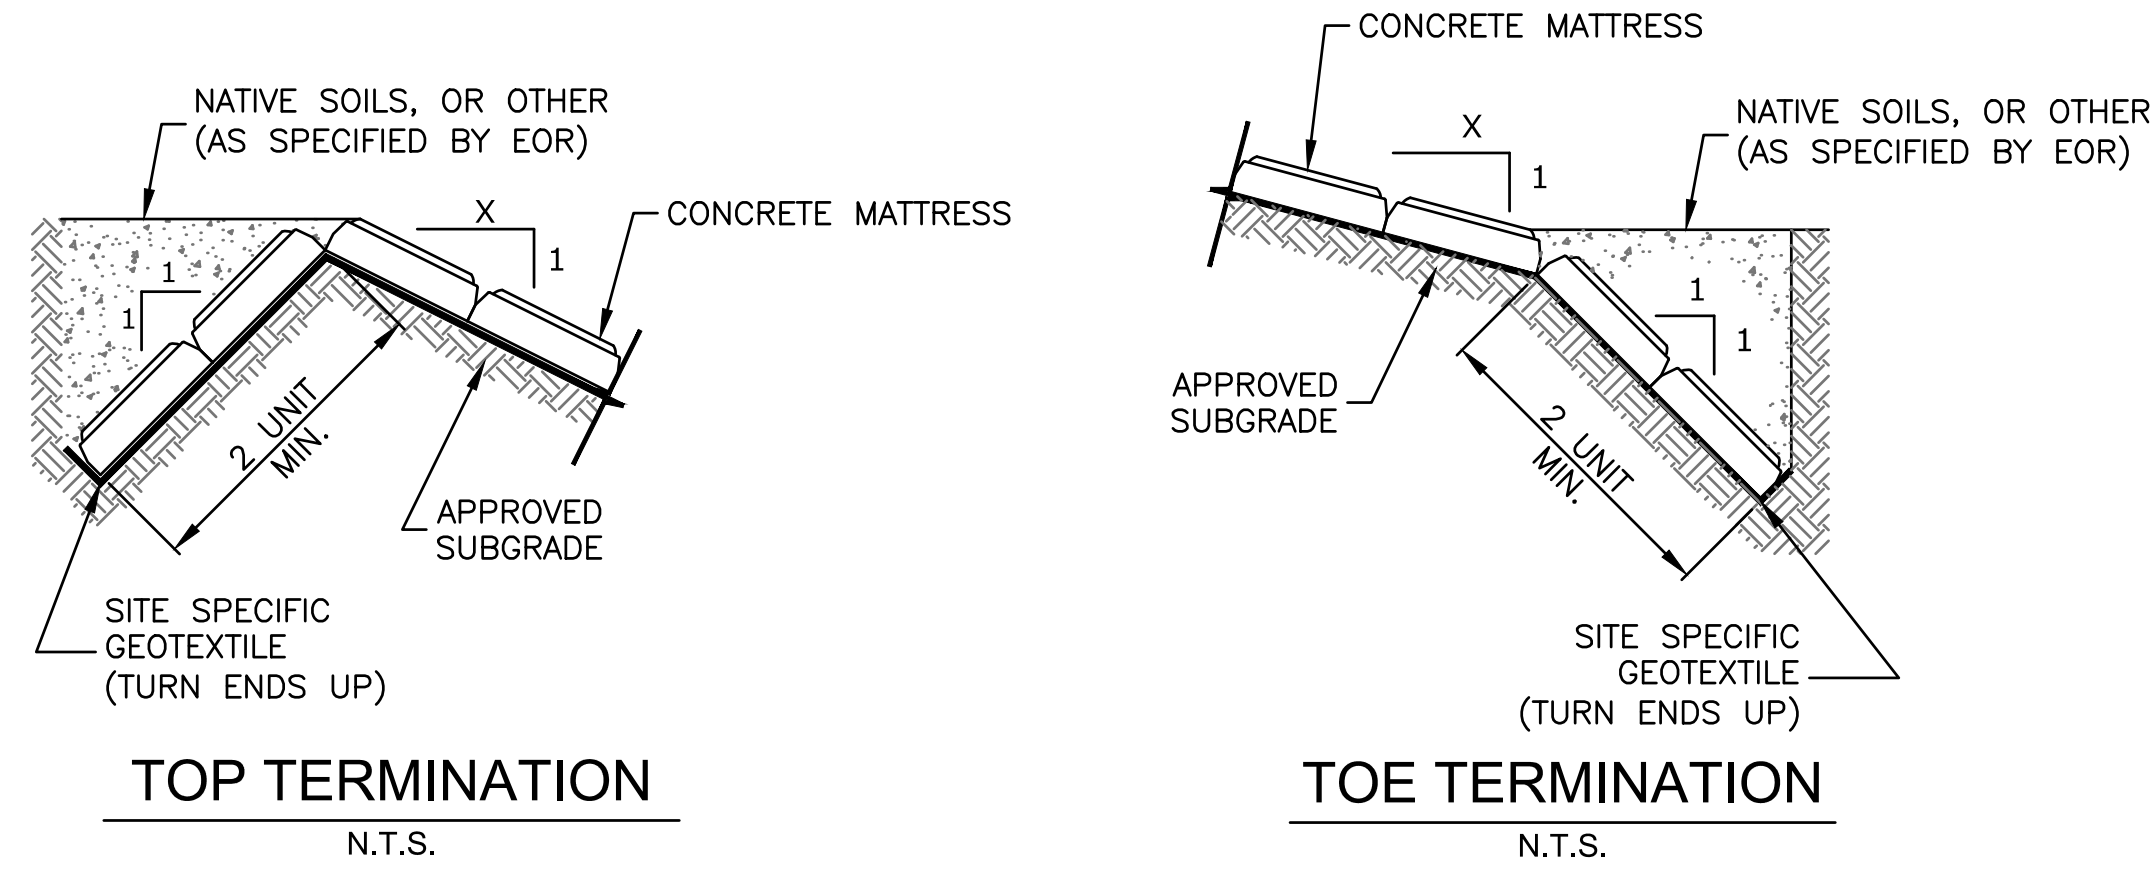

EXAMPLE PHOTO - FLEXAMAT

COMPANY NAME: HRGreen.com
PROJECT CONTACT: HRGreen.com
DATE PLOTTED: 2/6/2026 3:25 PM
FILE NAME: 191806-Typical_Sections
PLOT DRIVER: DWG To PDF.pc3
PEN TABLE: SEC-Standard.ctb



USER NAME = ROBERT.YERUSHALMI	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Typical_Sections	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -



**CITY OF AURORA
MASTODON LAKE DREDGING PROJECT**

PRECAST BLOCK REVETMENT MAT PLAN


SCALE: N.T.S. SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	21
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

1 - CANOE LAUNCH DETAILED PLAN

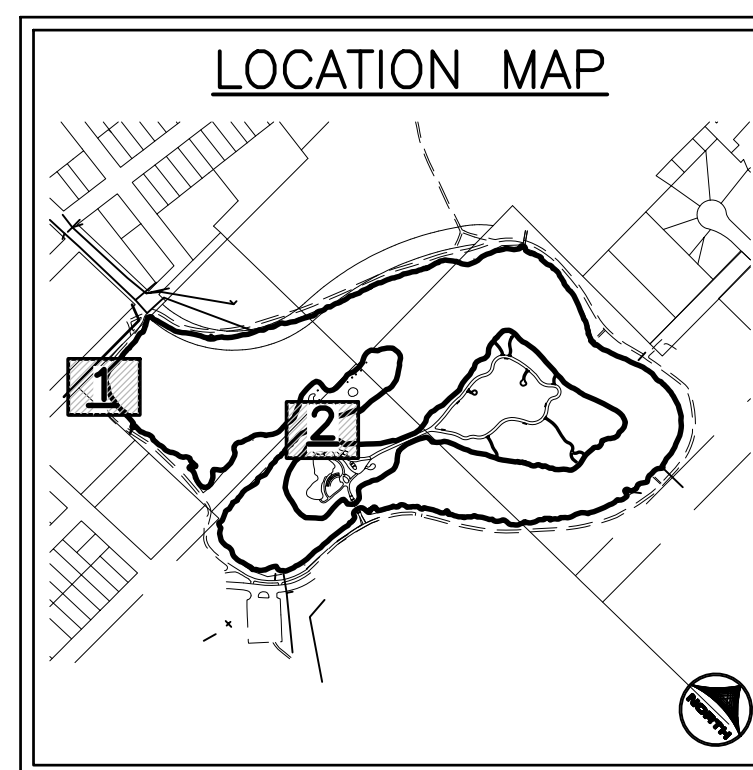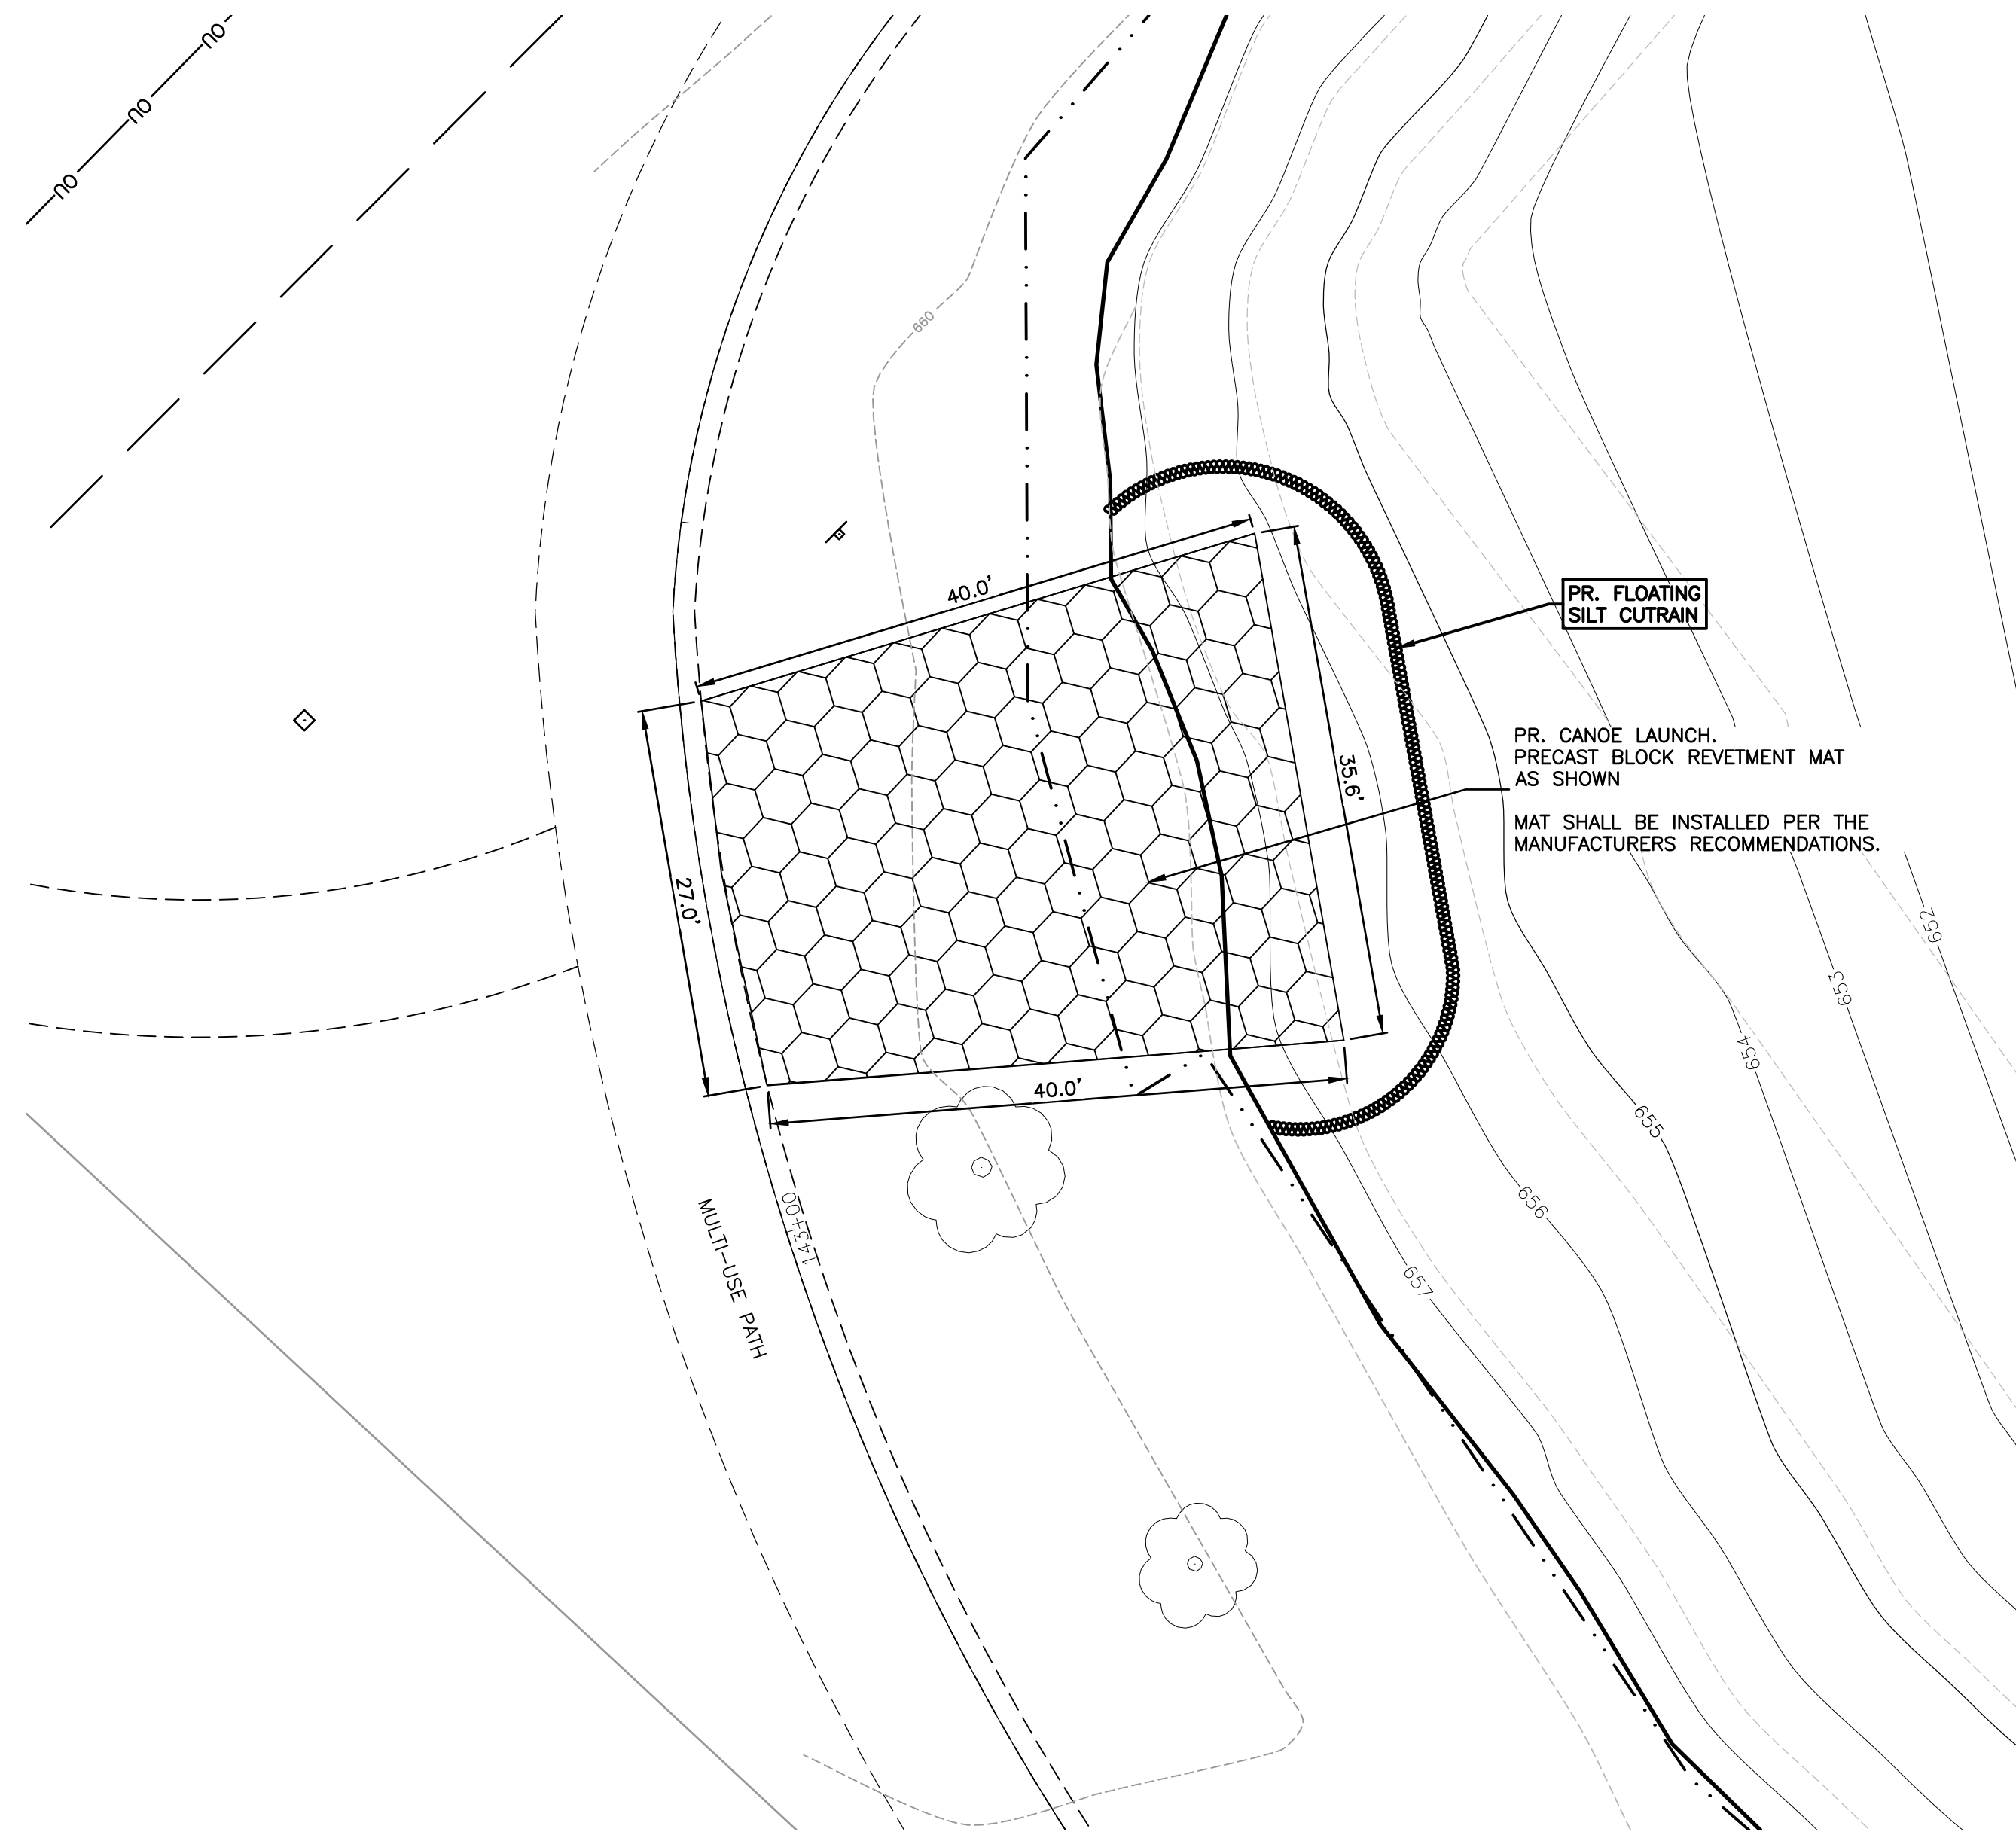

2 - CAUSEWAY DETAILED PLAN

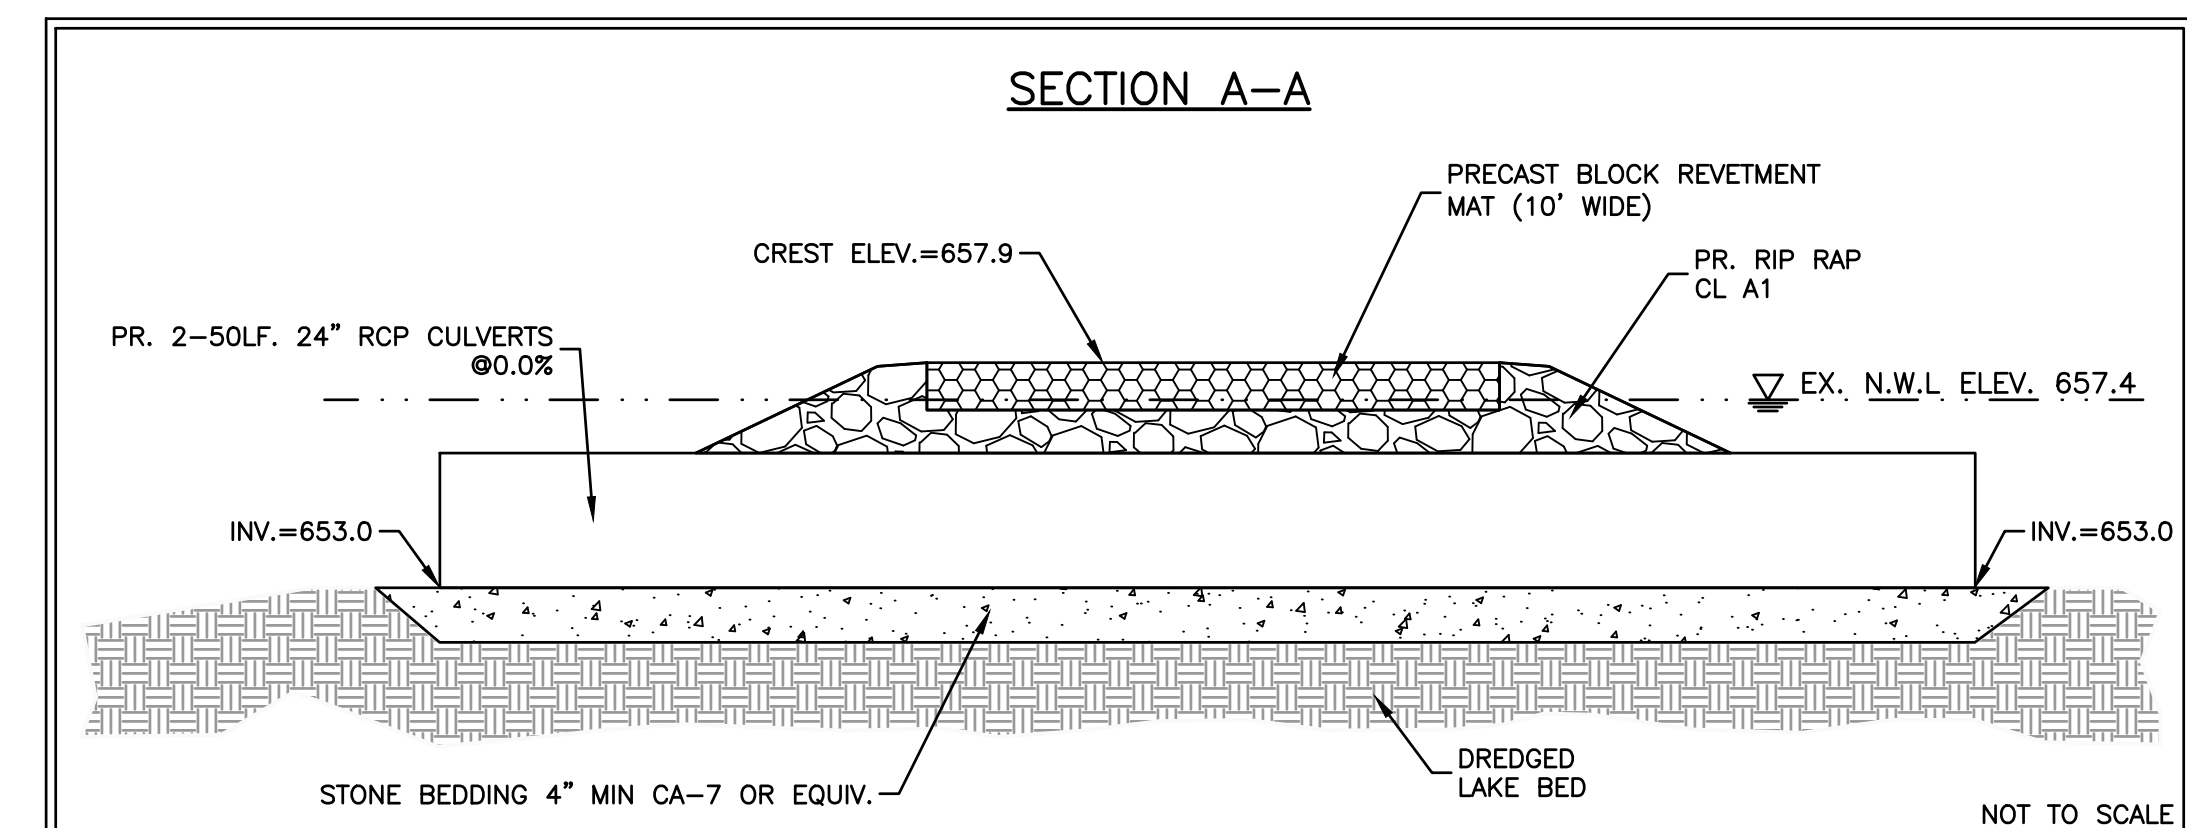

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:25 PM
 FILE NAME: 191806-Detailed-Canoe-Plan
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: ILDOT-Standard.ctb



USER NAME = KJENKINS	DESIGNED - LG	REVISED -
FILE NAME = 191806-Detailed-Canoe-Plan	DRAWN - MPL	REVISED -
PLOT SCALE = 1"=40'	CHECKED - AJ/LG	REVISED -
PLOT DATE = 2/6/2026	DATE - 10/05/2021	REVISED -

CITY OF AURORA
 MASTODON LAKE DREDGING AND
 SHORELINE RESTORATION PROJECT

CANOE LAUNCH AND CAUSEWAY DETAIL

SCALE: 1"=40' SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	32	22
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

CONTROL MEASURE GROUP	CONTROL MEASURE	KEY	APPL.	CONTROL MEASURE CHARACTERISTICS	TEMP.	PERMIT
VEGETATIVE SOIL COVER	TEMPORARY SEEDING	(TS)	X	PROVIDES QUICK TEMPORARY COVER TO CONTROL EROSION WHEN PERMANENT SEEDING IS NOT DESIRED OR TIME OF YEAR IS INAPPROPRIATE.	X	
	PERMANENT SEEDING	(PS)	X	PROVIDES PERMANENT VEGETATIVE COVER TO CONTROL EROSION, FILTERS SEDIMENT FROM WATER, MAY BE PART OF FINAL LANDSCAPE PLAN.		X
	DORMANT SEEDING	(DS)	X	SAME AS PERMANENT SEEDING EXCEPT IS DONE DURING DORMANT SEASON. HIGHER RATES OF SEED APPLICATION ARE REQUIRED.	X	
	SODDING	(SO)		QUICK PERMANENT COVER TO CONTROL EROSION. QUICK WAY TO ESTABLISH VEGETATION FILTER STRIP. CAN BE USED ON STEEP SLOPES OR IN DRAINAGEWAYS WHERE SEEDING MAY BE DIFFICULT.		
	GROUND COVER	(GC)	X	PROVIDES GROUND COVER, SHRUBS AND TREES IN ADDITION TO PERMANENT VEGETATION. MAY BE USED AS PART OF A FINAL LANDSCAPE PLAN ALONG WITH SHRUBS AND TREES.		X
NON VEGETATIVE SOIL COVER	RAIN GARDEN	(RG)		PROVIDES A TYPE OF FUNCTIONAL LANDSCAPING FEATURE DESIGNED TO CONTROL STORMWATER RUNOFF. SEE LANDSCAPING PLANS FOR DETAILS.		
	MULCHING	(M)	X	ADDED INSURANCE OF A SUCCESSFUL TEMPORARY OR PERMANENT SEEDING. CONTROLS UNWANTED VEGETATION AND PRESERVES MOISTURE. PROVIDES COVER WHERE VEGETATION CANNOT BE ESTABLISHED.	X	
	AGGREGATE COVER	(AG)		PROVIDES SOIL COVER ON ROADS AND PARKING LOTS AND AREAS WHERE VEGETATION CANNOT BE ESTABLISHED. PREVENTS MUD FROM BEING PICKED UP AND TRANSPORTED OFF-SITE.		
DIVERSIONS	PAVING	(P)	X	PROVIDES PERMANENT COVER ON PARKING LOTS AND ROADS OR OTHER AREAS WHERE VEGETATION CANNOT BE ESTABLISHED.		X
	EROSION BLANKET	(EB)	X	PROVIDES QUICK TEMPORARY COVER TO CONTROL EROSION WHEN PERMANENT SEEDING TIME OF YEAR IS INAPPROPRIATE AND IN SLOPED AREAS.	X	
	RIDGE DIVERSION	(RD)		TYPICALLY USED ABOVE SLOPES. USED WHERE AN EXCESS OF SOIL IS AVAILABLE.		
WATERWAYS	CHANNEL DIVERSION	(CD)		TYPICALLY USED AT TOP OR BASE OF SLOPES. USED WHEN EXCESS SOIL IS NOT AVAILABLE.		
	COMBINATION DIVERSION	(CBD)		TYPICALLY USED ANYWHERE ON A SLOPE. SOIL TAKEN OUT OF CHANNEL IS USED TO BUILD THE RIDGE.		
	CURB AND GUTTER	(CG)		SPECIAL CASE OF DIVERSION USED IN CONJUNCTION WITH A STREET TO DIVERT WATER FROM AN AREA NEEDING PROTECTION.		
	BENCHES	(B)		SPECIAL CASE OF DIVERSION CONSTRUCTED WHEN WORKING ON OUT SLOPES TO SHORTEN LENGTH OF SLOPE AND ADD SOIL STABILITY.		
	BARE CHANNEL	(BC)	X	PROVIDES MEANS OF CONVEYING RUNOFF TO DESIRED LOCATION. MAY BE USED TO DRAIN DEPRESSIONAL AREAS. ONLY APPLICABLE WHEN VELOCITY OF FLOW IS VERY LOW.	X	
ENCLOSED DRAINAGE	VEGETATIVE CHANNEL	(VC)	X	PROVIDES ADDED STABILITY TO CHANNEL USED WHEN VELOCITY OF FLOW IS NOT EXTREMELY FAST.	X	
	LINED CHANNEL	(LC)	X	USED WHEN VEGETATION WILL NOT PROTECT THE CHANNEL AGAINST HIGH VELOCITIES OF FLOW OR WHERE VEGETATION CANNOT BE ESTABLISHED.	X	
	DITCH CHECKS	(DC)	X	PROVIDES AN ENERGY DISSIPATOR ALONG A LENGTHY CHANNEL TO REDUCE VELOCITY OF STORMWATER.	X	
SPILLWAYS	STORM SEWER	(ST)	X	CAN BE USED TO CONVEY SEDIMENT LADEN WATER TO SEDIMENT BASIN OR IN CONJUNCTION WITH A WATERWAY.	X	
	UNDERDRAIN	(UD)		USED TO LOWER WATER TABLE AND INTERCEPT GROUNDWATER FOR BETTER VEGETATION GROWTH AND SOIL STABILITY. USED TO CARRY BASE FLOW IN WATERWAYS AND TO DRAIN SEDIMENT BASINS.		
OUTLETS	STRAIGHT PIPE SPILLWAY	(SS)		USED FOR RELATIVELY SMALL VERTICAL DROPS AND SMALL FLOWS OF WATER.		
	DROP INLET PIPE SPILLWAY	(DIS)		SAME AS PIPE SPILLWAY EXCEPT LARGER FLOWS AND LARGE VERTICAL DROPS CAN BE ACCOMMODATED.		
	WEIR SPILLWAY	(W)		USED FOR RELATIVELY SMALL VERTICAL DROPS AND FLOWS MUCH GREATER THAN PIPE STRUCTURES.		
SEDIMENT BASINS	BOX INLET WEIR SPILLWAY	(BS)		SAME AS WEIR SPILLWAY EXCEPT LARGER FLOWS CAN BE ACCOMMODATED BECAUSE OF LOWER WEIR LENGTH.		
	LINED APRON	(LA)		PROTECTS DOWNSTREAM CHANNEL FROM HIGH VELOCITY OF FLOW DISCHARGING FROM STRUCTURES.		
SEDIMENT FILTERS	STONE RIP RAP	(RR)	X	USED AS AN ENERGY DISSIPATOR AT OUTLET STRUCTURES TO REDUCE VELOCITIES.	X	
	EMBANKMENT SEDIMENT BASIN	(ES)		USED WHERE TOPOGRAPHY LENDS ITSELF TO CONSTRUCTING A DAM AND EARTH FILL IS AVAILABLE.		
	EXCAVATED SEDIMENT BASIN	(XS)		USED WHERE EMBANKMENT COULD CAUSE A HAZARD DOWNSTREAM IN CASE OF FAILURE AND WHEN EXCESS EARTH FILL IS NOT AVAILABLE.		
MUD AND	COMBINATION SEDIMENT BASIN	(SB)	X	USED WHEN TOPOGRAPHY IS SUITABLE BUT ADDITIONAL CAPACITY IS NEEDED.	X	
	BARRIER FILTER (SILT FENCE)	(BF)	X	A TEMPORARY BARRIER OF ENTRENCHED GEOTEXTILE FABRIC (FILTER FABRIC) STRETCHED ACROSS AND ATTACHED TO SUPPORTING POSTS USED TO INTERCEPT SEDIMENT LADEN RUNOFF FROM SMALL DRAINAGE AREAS OF DISTURBED SOIL.	X	
	VEGETATIVE FILTER	(VF)		USED ALONG DRAINAGEWAYS OR PROPERTY LINES TO FILTER SEDIMENT FROM RUNOFF. SIZE MUST BE INCREASED IN PROPORTION TO DRAINAGE AREA.		
	INLET PROTECTION	(IP)	X	USED FOR FILTERING SEDIMENT WITHIN GRASS AREAS BEFORE WATER ENTERS THE STORM SEWER.	X	
DUST CONTROL	FILTER BASKET	(FB)	X	USED FOR FILTERING SEDIMENT WITHIN THE ROADWAY BEFORE ENTERING THE STORM SEWER.	X	
	STABILIZED CONST. ENTRANCE	(SE)	X	A STABILIZED PAD OF AGGREGATE UNDERLAIN WITH FILTER FABRIC LOCATED AT ANY POINT WHERE TRAFFIC WILL BE ENTERING OR LEAVING A CONSTRUCTION SITE TO OR FROM A PUBLIC RIGHT-OF-WAY, STREET, ALLEY, SIDEWALK, OR PARKING AREA TO PREVENT MUD FROM BEING PICKED UP AND CARRIED OFF-SITE.	X	
MISC.	CONSTRUCTION ROAD STABILIZATION	(CRS)		THE STABILIZATION OF TEMPORARY CONSTRUCTION ACCESS ROUTES, SUBDIVISION ROADS, ON-SITE VEHICLE TRANSPORTATION ROUTES, AND CONSTRUCTION PARKING AREAS WITH STONE IMMEDIATELY AFTER GRADING TO PREVENT MUD FROM BEING PICKED UP AND CARRIED OFF-SITE.		
	DUST AND TRAFFIC CONTROL	(DT)	X	CONTROL OF DUST BLOWING AND MOVEMENT ON CONSTRUCTION SITES AND ROADS.	X	
MISC.	EXPLORATORY TRENCH	(ET)		EXPLORATORY TRENCH EXCAVATION FOR EXISTING UTILITIES.		
	CONCRETE WASHOUT	(WO)		PREVENTS THE DISCHARGE OF POLLUTANTS TO STORMWATER FROM CONCRETE WASTE IN A DESIGNATED WASHOUT AREA (CONCRETE WASHOUT BMP)		

SEEDING / SODDING CHART

STABILIZATION TYPE	CONTRACTOR RESPONSIBILITY			PER I.D.O.T. SPECIFICATIONS APR. 1 - JUNE 15				CONTRACTOR RESPONSIBILITY			PER I.D.O.T. SPECIFICATIONS AUG. 1 - NOV. 1			CONTRACTOR RESPONSIBILITY	
	JAN.	FEB.	MAR.	APR.	MAY	JUNE	JULY	AUG.	SEPT.	OCT.	NOV.	DEC.			
* DORMANT SEEDING (135lb/Ac)															
* TEMPORARY SEEDING (100lb/Ac)															
* PERMANENT SEEDING (See IDOT Specs.)															
* MULCHING (2 Tons/Ac)	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
* SODDING (See IDOT Specs.)															

* SEE I.D.O.T. SPECIFICATIONS FOR INSTALLATION AND APPLICATION REQUIREMENTS
 ** SUPPLEMENTAL WATERING MAYBE REQUIRED. (SEE I.D.O.T. SPECIFICATIONS FOR REQUIREMENTS)

EROSION CONTROL NOTES:

- No land disturbing activities shall not commence until approval to do so has been received by governing authorities, in addition to, no land clearing or grading shall begin until all perimeter erosion and sediment control measures have been installed. (Including storm water pollution prevention plan per the development criteria.)
- The general contractor shall strictly adhere to the storm water pollution prevention plan (SWPPP) during construction operations.
- All topsoil shall be stripped prior to filling.
- All exposed areas shall be seeded as specified within 14 days of final grading.
- Should construction stop for longer than 14 days, the site shall be temp. seeded.
- Sediment and erosion control measures shall be inspected at least once every seven (7) days and within 24 hours of a rain exceeding 0.5 inches during a 24-hour period or more frequently if required by governing NPDES general permit. All maintenance required by inspection shall commence within 24 hours and be completed within 48 hours of report.
- This plan shall not be considered all inclusive as the general contractor shall take all necessary precautions to prevent soil sediment from leaving the site.
- General contractor shall comply with all state and local ordinances that apply.
- Additional erosion and sediment control measures will be installed if deemed necessary by an on site inspection.
- If installation of storm drainage system should be interrupted by weather or nightfall, the pipe ends shall be covered with filter fabric.
- General contractor shall be responsible to take whatever means necessary to establish permanent soil stabilization.
- All sedimentation and erosion control regulations shall be adhered to per the City of Aurora's requirements
- All erosion and sediment control practices shall be maintained and repaired as needed to ensure effective performance of the required erosion control measures.
- All erosion and sediment control work shall conform to the I.D.O.T. Manual for standards and procedures for erosion control.
- All construction will adhere to the requirements set forth in the IEPA's new construction site activities national pollutant discharge elimination system (npdes) storm water permit.
- All roadways shall be cleaned at the end of each construction day.
- All disturbed areas shall be stabilized within 7 days of active disturbance.
- All erosion control measures shall be disposed of within 30 days of final stabilization of the site.
- Ground cover for 5:1 slopes or greater shall be established as soon as possible.
- All disturbed areas to be restored w/ 4" topsoil respread & seeding/sodding unless otherwise noted on plans
- Silt filter fabric shall be placed between frame and grate until vegetation is established. (see detail)
- Utilize excelsior blanket on all slopes of 5:1 or greater.
- *Seeding per I.D.O.T. Manual, section 251, standard specifications for road and bridge construction, (latest edition) see plans for seed and blanket requirements.
- *Mulch/hydrused per I.D.O.T. Manual, section 251, standard specifications for road and bridge construction, (latest edition)
- *Mulch/hydrused method 3 shall be used in all turf grass areas.
- No dimensions shall be assumed by scaling.
- No known drain tiles are present on the proposed development, if tiles are encountered during construction please notify the engineer immediately.
- Part of the proposed project is located within a flood hazard 10-100yr area a flood hazard area
- Excess material shall be placed at specified location unless otherwise specified by owner and approved by engineer for use of lot grading. Stockpiles shall be surrounded with filter fence and shall be seeded per I.D.O.T. Manual (latest edition) (temporary) if left more than 14 working days.
- General contractor shall notify all utility companies having underground utilities on site or in right-of-way prior to excavation. Contractor shall contact utility locating company and locate all utilities prior to grading start.
- Stockpiles of soil and other fill areas to remain in place for more than three days shall be furnished with erosion and sediment control measures (i.e. perimeter silt fence).
- Temporary erosion control may be required during hauling and shall be installed per the direction of the engineer and/or SWCD.

PHASING NOTES:

SEQUENCE OF MAJOR ACTIVITIES - AS APPLICABLE TO PROJECT

The Contractor will be responsible for implementing the following erosion control and storm water management control measures. The Contractor may designate these tasks to certain subcontractors as he or she sees fit, but the ultimate responsibility for implementing these controls and ensuring their proper functioning remains with the Contractor. The order of activities will be as follows (refer to the Erosion and Sediment Control Plan Sheet contained in this SWPPP for details and refer to the Suggested Phasing Plan in the design drawings for construction sequencing):

- A pre-construction meeting shall be held by the Site Project Manager, and the Operator's Engineer prior to land disturbing activities.
- Prior to disturbing the site install temporary ditch checks, perimeter silt fences and inlet protection to existing storm infrastructure in the locations shown on the Plan sheets.
- Implement erosion control measures around the culverts and channels to prevent sedimentation from infiltrating into the storm water system.
- Begin clearing and grubbing operations if applicable. Clearing and grubbing shall be done only in areas where grading and shaping or riprap placement will be performed.
- Commence work shown on the plans.
- Disturbed areas of the site where Construction Activity has ceased for more than 7 days shall be temporarily seeded and watered.
- Install inlet / outlet protection around the constructed culverts and riprap aprons to prevent sedimentation from infiltrating into the culverts and aprons as shown on the Plan sheets.
- Temporary seed all fill slopes around perimeter of project. (if applicable).
- Carry out final final grading bank stabilization measures with seeding and rolled erosion control products where shown on the Plan sheets.
- Remove inlet protection around culverts, inlets and manholes when surfaces are stabilized.
- Remove temporary construction exits

FAILURE TO COMPLY:

In the event a notice of violation is issued on this project, any and all fines will be the sole responsibility of the contractor. The owner, owner's representative, or other owner's agents will not participate in any payment or reimbursement for fines and will not authorize time extensions due to delays in project progress for work stoppage required to remedy the violations.

NOTES:

This plan has been prepared to comply with the provisions of the NPDES Permit Number issued by the Illinois Environmental Protection Agency for Stormwater Discharges from Construction Site Activities.

- Site Description.
 - The Overall project area is tributary to the Fox River.
 - The following is a description of the construction activity which is the subject of this plan: The proposed improvements consists of construction of hydraulic dredging, dewatering of dredged materials, shoreline stabilization, earthwork, HMA patching, installation of electrical services for aquatic mixing and landscaping with native vegetation. The construction activities for site improvements will include: site clearing, grubbing, mass grading, pavement construction, installation of utilities including storm sewers, soil erosion and sedimentation control measures, as a minimum.
 - The following is a description of the intended sequence of major activities which will disturb soils for major portions of the construction site such as grubbing, excavation, and grading:
 - The sequence of the construction activities may be as follows: See Sequence of major activities on this sheet.
 - The total area of the construction site is estimated to be 2.1± acres.
 - The total area if the site that is estimated to be disturbed by excavation, grading, or other activities, is 2.1± acres.
- Controls.

This section of the plan addresses the various controls that will be implemented for each of the major construction activities described in 1.b. above. For each measure discussed, the contractor will be responsible for its implementation as indicated. Each such contractor has signed the required certification on forms which are attached to, and are a part of, this plan.

 - Erosion and Sediment Controls.
 - STABILIZATION PRACTICES. Provided below is a description of interim and permanent stabilization practices, including site-specific scheduling of the implementation of the practices. Site plans will ensure that existing vegetation is preserved where attainable and disturbed portions of the site will be stabilized. Except as provided in 2.a. (i) (A) and 2.b. stabilization measures shall be initiated as soon as practicable in portions of the site where construction activities have temporarily or permanently ceased, but in no case more than 7 days after the construction activity in that portions of the site where construction activity will not occur for a period of 21 or more calendar days.
 - (A) Where the initiation of stabilization measures by the 14th day after construction activity temporarily or permanently ceases is precluded by snow cover, stabilization measures shall be initiated as soon as practicable thereafter.
 - The following interim and permanent stabilization practices, as a minimum will be implemented to stabilize the disturbed area of the site:

1 Temporary Seeding	4 Barrier filter	7 Vegetative filter
2 Permanent seeding	5 Inlet protection	8 Stabilized construction entrance
3 Erosion Blanket	6 Outlet protection	9 Dust & Traffic Control
 - STRUCTURAL PRACTICES. Provided below is a description of structural practices that will be implemented, to the degree attainable, to divert flows from exposed soils, store flows or otherwise limit runoff and the discharge of pollutants from exposed areas of the site. The installation of these devices may be subject to Section 404 of the Clean Water Act.
 - Storm sewer system
 - Vegetated drainage swales
 - Permanent seeding
 - Outlet protection
 - Filter fabric
 - Inlet protection
 - Erosion Control. It shall be the Contractor's responsibility to provide adequate erosion control on the job site. The following erosion control sequence shall be adhered to:
 - See Sequence of major activities on this sheet.

Any siltation of conduits, structures, or ditches shall be cleaned and maintained by the Contractor, on a weekly basis, until the seeding has taken hold. All washouts, gullies, etc. will be regraded and reseeded by the Contractor, at the Contractor's expense.

The Contractor's responsibility for erosion control shall extend throughout the construction process. The Contractor shall be responsible for cleanup of paved surfaces within and adjacent to the project.

All erosion control practices shall be in compliance with the latest revision of the "Standard Specifications for Road and Bridge Construction," by the Illinois Department of Transportation and with "Standards and Specifications for Soil Erosion and Sedimentation Control" as published by the Illinois Environmental Protection Agency.

If a topsoil stockpile location is provided and approved by the County, Contractor shall establish erosion control measures for the stockpile if it is to remain in place for more than three days. In addition, barrier filter fence shall enclose topsoil stockpile location with exception of truck access during construction hours.
 - Stormwater Management.
 - Provided below is a description of measures that will be installed during the construction process to control pollutants in stormwater discharges that will occur after construction operations have been completed. The installation of these devices may be subject to Section 404 of the Clean Water Act.
 - The practices selected for implementation were determined on the basis of the technical guidance contained in IEPA's Standard Specifications for Soil Erosion and Sedimentation Control, and other ordinances listed in the Specifications.
 - The stormwater pollutant control measures shall include:
 - Silt filter fence
 - Drainage swales
 - Storm sewers
 - Rip-rap outlet protection
 - Straw bale inlet protection
 - Retention/Detention ponds
 - Velocity dissipation devices will be placed at discharge locations and along the length of any outfall channel as necessary to provide a non-erosive velocity flow from the structure to a water course so that the natural physical and biological characteristics and functions are maintained and protected (e.g., maintenance of hydrologic conditions, such as the hyporheic and hydrodynamics present prior to the initiation of construction activities).
 - Stormwater Management Control includes
 - Stone Riprap
 - Filter Fabric
 - Vegetative channels.
 - Outlet protection using Gabion mattress.
 - Inlet protection.
- Other Controls.
 - Waste Disposal. The solid waste materials including trash, construction debris, excess construction materials, machinery, tools and other items will be collected and disposed off-site by the contractor. The contractor is responsible to acquire any permit required for such disposal. Burning on the site will not be permitted. No solid materials, including building materials, shall be discharged into Waters of the State, except as authorized by a Section 404 permit.
 - The provisions of this plan shall ensure and demonstrate compliance with applicable State and/or local waste disposal, sanitary sewer or septic system regulations.

The sanitary sewage will be discharged to the proposed sanitary sewer constructed per IEPA and local standards.

 - Approved State or Local Plans.
 - The management practices, controls and other provisions contained in this plan are at least as protective as the requirements contained in the Illinois Environmental Protection Agency's Standards and Specifications for Soil Erosion and Sediment Control (Latest revision), Illinois Procedures and Standards for Urban Soil Erosion and Sedimentation Plan, and the Municipal Subdivision Ordinance. Requirements specified in sediment and erosion control site plans or site permits or stormwater management or site plans or site permits approved by local officials that are applicable to protecting surface water resources are, upon submittal of an NOI to be authorized to discharge under this permit, incorporated by reference and are enforceable under this permit even if they are not specifically included in the plan.
 - Maintenance.
 - The following is a description of procedures that will be used to maintain, in good and effective operating conditions, vegetation, erosion and sediment control measures and other protective measures identified in this plan and Standard Specifications.
 - Stabilized construction entrance: The entrance shall be maintained to prevent tracking of sediment onto public streets. This will be done by top dressing with additional stones, remove and replace top layer of stones or washing the entrance. The sediment washed on the public right-of-way will be removed immediately.

SPECIFICATIONS AND GENERAL NOTES:

- Vegetative erosion control measures: The vegetative growth of temporary and permanent seeding, sodding, vegetative channels, vegetative filter, etc. shall be maintained periodically and supply adequate watering and fertilizer. The vegetative cover shall be removed and reseeded as necessary.
 - Silt filter fence: The damaged silt filter fence shall be restored to meet the standards or removed and replaced as needed.
 - Rip-rap outlet protection: It shall be inspected after high flows for any scour beneath the Rip-rap or for stones that have been dislodged. It shall be repaired immediately.
 - Inlet Protection: Shall be inspected and emptied of silt if filled as required.
- Disturbed areas shall be stabilized with temporary or permanent measures within 7 calendar days following the end of active disturbance, or redistribution, consistent with the following criteria:
 - Appropriate temporary or permanent stabilization measures shall include seeding, mulching, sodding, and/or non-vegetative measures.
 - Areas having slopes greater than 12 percent shall be stabilized with sod, mat, or blanket in combination with seeding or equivalent.
 - Areas to be seeded with turf grass shall be stabilized with Mulch Method 3. No blankets shall be applied within turf grass areas.
- Soil storage piles containing more than 10 cu. yds. of material shall not be located with a downslope drainage length less than 25 feet to a roadway or drainage channel. Filter barriers, including straw bales, filter fence, or equivalent, shall be installed immediately on the down slope of the piles.
- Inspections.

The Owner, or Owner's representative shall provide qualified personnel to inspect disturbed areas of the construction site which have not been finally stabilized, structural control measures and location where vehicles enter or exit the site. Such inspections shall be conducted at least once every seven (7) calendar days within 24 hours of the end of a storm that is 0.5 inches or greater or equivalent snowfall.

 - Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. Erosion and sediment control measures identified in the plan shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Locations where vehicles enter or exit the site shall be inspected for evidence of off-site sediment tracking.
 - Based on the results of the inspection, the description of potential pollutant sources identified in section 1 above and pollution prevention measures identified in section 2 above shall be revised as appropriate as soon as practicable after such inspection. Any changes to this plan resulting from the required inspections shall be implemented within 7 calendar days following the inspection.
 - A report summarizing the scope of the inspection, name(s) and qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of the stormwater pollution prevention plan and actions taken in accordance with section 4.b. shall be made and retained as part of the plan for at least three (3) years after the date of the inspection. The report shall be signed in accordance with Part VI.G of the general permit.
 - If any violation of the provisions of this plan is identified during the conduct of the construction work covered by this plan, the Resident Engineer or Resident Technician shall complete and file an "Incidence of Noncompliance" (ION) report for the identified violation. The Resident Engineer or Resident Technician shall use forms provided by the Illinois Environmental Protection Agency and shall include specific information on the cause of noncompliance, actions which were taken to prevent any further occurrences of noncompliance, and a statement detailing any environmental impact which may have resulted from the noncompliance. All reports of noncompliance shall be signed by a responsible authority in accordance with Part VI. G of the general permit. The report of noncompliance shall be mailed to the following address:

Illinois Environmental Protection Agency
 Division of Water Pollution Control
 Attn: Compliance Assurance Section
 2200 Churchill Road
 Post Office Box 19276
 Springfield, Illinois 62794-9276
- Non-Stormwater Discharges.

Except for flows from fire fighting activities, sources of non-stormwater that may be combined with stormwater discharges associated with the industrial activity addressed in this plan, are described below:

 - Water main flushing
 - Fire hydrant flushing
 - Watering for dust control
 - Irrigation drainage for vegetative growth for seeding, etc..

The pollution prevention measures, as described below, will be implemented for non-stormwater components of the discharge:

The fire hydrant and water main shall not be flushed directly on the exposed area of sub grade of the pavement. Hoses shall be used to direct the flow into the storm sewer system, if available.

The erosion due to irrigation of seeding shall be considered minor.

Contractor to provide the above non-stormwater discharged control to the standard specification required by the City or the approved equal.
- Monitoring and Management Plan

A three-year maintenance and monitoring plan is required after installation of native landscaping. See Project Specifications for details.

CONTRACTOR'S AND SUBCONTRACTOR'S CERTIFICATE

I certify under penalty of law that I understand the terms and conditions of the general National Pollutant Discharge Elimination System (NPDES) permit (ILR10) that authorizes the storm water discharges associated with industrial activity from the construction site identified as part of this certification.

CONTRACTOR'S PRINTED NAME AND SIGNATURE _____ CERTIFICATION DATE _____

CONTRACTOR TITLE _____ TELEPHONE NUMBER _____

CONTRACTOR COMPANY NAME AND ADDRESS _____

SUBCONTRACTOR'S NAME AND SIGNATURE _____ CERTIFICATION DATE _____

SUBCONTRACTOR'S TITLE _____ TELEPHONE NUMBER _____

SUBCONTRACTOR'S COMPANY NAME AND ADDRESS _____

SITE ADDRESS _____

IEPA-ILR10 PERMIT # _____

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: USER NAME = KJENKINS
 CLIENT: FILE NAME = 191806-Details
 DATE PLOTTED: 2/6/2026 3:26 PM
 191806-Details
 DWG TO PDF: pc3
 PLOT DRIVER: SEC-Standard.ctb
 PEN TABLE: SEC-Standard.ctb



HRGreen.com
 Illinois Professional Design Firm
 #184.001322

DESIGNED - LRG
 DRAWN - MPL/RMY
 CHECKED - LRG
 DATE -

REVISED -
 REVISED -
 REVISED -
 REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

EROSION CONTROL SPECIFICATIONS AND NOTES
 SCALE: N.T.S. SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	23
CONTRACT NO.				
		ILLINOIS	FED. AID PROJECT	

UNITED STATES ARMY CORPS OF ENGINEERS NOTES:

- EARTHEN COFFERDAMS OR OTHER PRACTICES THAT WOULD RESULT IN A RELEASE OF SEDIMENT INTO WATERS OF THE U.S. ARE NOT AUTHORIZED FOR USE. COFFERDAMS SHALL BE CONSTRUCTED OF NON-ERODIBLE MATERIALS ONLY. ACCEPTABLE PRACTICES INCLUDE, BUT ARE NOT LIMITED TO: PRE-FABRICATED RIGID COFFERDAMS, SHEET PILING, INFLATABLE BLADDERS, SANDBAGS AND FABRIC-LINED BASINS. 1. WORK IN THE WATERWAY SHOULD BE TIMED TO TAKE PLACE DURING LOW OR NO-FLOW CONDITIONS.
- LOW FLOW CONDITIONS ARE FLOW AT OR BELOW THE NORMAL WATER ELEVATION.
- WATER SHALL BE ISOLATED FROM THE IN-STREAM WORK AREA USING A COFFERDAM CONSTRUCTED OF NON-ERODIBLE MATERIALS (STEEL SHEETS, AQUA BARRIERS, RIP RAP AND GEOTEXTILE FABRIC, ETC.). EARTHEN COFFERDAMS ARE NOT PERMISSIBLE.
- WORK MAY NOT BE PERFORMED IN THE WATER, EXCEPT FOR THE PLACEMENT OF THE MATERIALS NECESSARY FOR THE CONSTRUCTION OF THE COFFERDAM. THE COFFERDAM MUST BE CONSTRUCTED FROM THE UPLAND AREA AND NO EQUIPMENT MAY ENTER THE WATER AT ANY TIME. IF THE INSTALLATION OF THE COFFERDAM CAN NOT BE COMPLETED FROM SHORE AND ACCESS IS NEEDED TO REACH THE AREA TO BE COFFERED, OTHER MEASURES, SUCH AS THE CONSTRUCTION OF A CAUSEWAY, WILL BE NECESSARY TO ENSURE THAT EQUIPMENT DOES NOT ENTER THE WATER. ONCE THE COFFERDAM IS IN PLACE AND THE ISOLATED AREA IS DEWATERED, EQUIPMENT MAY ENTER THE COFFERED AREA TO PERFORM THE REQUIRED WORK.
- IF BYPASS PUMPING IS NECESSARY, THE INTAKE HOSE SHALL BE PLACED ON A STABLE SURFACE OR FLOATED TO PREVENT SEDIMENT FROM ENTERING THE HOSE. THE BYPASS DISCHARGE SHALL BE PLACED ON A NON-ERODIBLE, ENERGY DISSIPATING SURFACE PRIOR TO REJOINING THE STREAM FLOW AND SHALL NOT CAUSE EROSION. FILTERING OF BYPASS WATER IS NOT NECESSARY UNLESS THE BYPASS WATER HAS BECOME SEDIMENT-LADEN AS A RESULT OF THE CURRENT CONSTRUCTION ACTIVITIES.
- DURING DEWATERING OF THE COFFERED AREA, ALL WATER MUST BE FILTERED TO REMOVE SEDIMENT. POSSIBLE OPTIONS FOR SEDIMENT REMOVAL INCLUDE BAFFLE SYSTEMS, ANIONIC POLYMERS, DEWATERING BAGS, OR OTHER APPROPRIATE METHODS. WATER SHALL HAVE SEDIMENT REMOVED PRIOR TO BEING RE-INTRODUCED TO THE DOWNSTREAM WATERWAY. A STABILIZED CONVEYANCE FROM THE DEWATERING DEVICE TO THE WATERWAY MUST BE IDENTIFIED. DISCHARGE WATER IS CONSIDERED CLEAN IF IT DOES NOT RESULT IN A VISUALLY IDENTIFIABLE DEGRADATION OF WATER CLARITY.
- THE PORTION OF THE SIDE SLOPE THAT IS ABOVE THE OBSERVED WATER ELEVATION SHALL BE STABILIZED AS SPECIFIED IN THE PLANS PRIOR TO ACCEPTING FLOWS. THE SUBSTRATE AND TOE OF SLOPE THAT HAS BEEN DISTURBED DUE TO CONSTRUCTION ACTIVITIES SHALL BE RESTORED TO PRE-CONSTRUCTION CONDITIONS AND FULLY STABILIZED PRIOR TO ACCEPTING FLOWS.

CITY STORMWATER PERMIT REQUIREMENTS:

- SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. AREAS OF THE DEVELOPMENT SITE THAT ARE NOT TO BE GRADED SHALL BE PROTECTED FROM CONSTRUCTION TRAFFIC OR OTHER DISTURBANCE UNTIL FINAL SEEDING IS PREFORMED.
- SOIL STABILIZATION MEASURES SHALL CONSIDER THE TIME OF YEAR, DEVELOPMENT SITE CONDITIONS AND THE USE OF TEMPORARY OR PERMANENT MEASURES.
- STABILIZATION BY SEEDING SHALL INCLUDE TOPSOIL PLACEMENT AND FERTILIZATION, AS NECESSARY.
- NATIVE SEED MIXTURES SHALL INCLUDE RAPID-GROWING ANNUAL GRASSES OR SMALL GRAINS TO PROVIDE INITIAL, TEMPORARY SOIL STABILIZATION.
- OFFSITE PROPERTY SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION. VELOCITY DISSIPATION DEVICES SHALL BE PLACED AT CONCENTRATED DISCHARGE LOCATIONS ALONG THE LENGTH OF ANY OUTFALL CHANNEL, AS NECESSARY TO PREVENT EROSION.
- SEDIMENT CONTROL MEASURES SHALL BE INSTALLED PRIOR TO THE DISTURBANCE OF TRIBUTARY AREAS.
- STABILIZATION OF DISTURBED AREAS SHALL BE INITIATED IMMEDIATELY WHENEVER ANY CLEARING, GRADING, EXCAVATING OR OTHER EARTH DISTURBING ACTIVITIES HAVE PERMANENTLY CEASED ON ANY PORTION OF THE DEVELOPMENT SITE, OR TEMPORARY CEASED ON ANY PORTION OF THE DEVELOPMENT SITE AND WILL NOT RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS. STABILIZATION OF DISTURBED AREAS SHALL BE INITIATED WITHIN 1 WORKING DAY OF PERMANENT OR TEMPORARY CESSATION OF EARTH DISTURBING ACTIVITIES AND SHALL BE COMPLETED AS SOON AS POSSIBLE, BUT NO LATER THAN 14 CALENDAR DAYS FROM THE INITIATION OF STABILIZATION WORK IN THE AREA. EXCEPTIONS TO THESE TIME FRAMES ARE SPECIFIED AS INSTANCES WHEN THE INITIATION OF STABILIZATION MEASURES IS PRECLUDED BY SNOW COVER, STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE AND IN AREAS WHERE CONSTRUCTION ACTIVITY HAS TEMPORARILY CEASED AND WILL RESUME AFTER 14 DAYS, A TEMPORARY STABILIZATION METHOD MAY BE USED.
- DISTURBANCE OF STEEPS SLOPES SHALL BE MINIMIZED. AREAS OR EMBANKMENTS HAVING SLOPES STEEPER THAN 3:1 SHALL BE STABILIZED WITH STAKING IN PLACE SOD, EROSION CONTROL BLANKET IN COMBINATION WITH SEEDING, OR EQUIVALENT CONTROL MEASURE.
- PERIMETER CONTROL MEASURES SHALL BE PROVIDED DOWNSLOPE AND PERPENDICULAR TO THE FLOW OF RUNOFF FROM DISTURBED AREAS, WHERE THE TRIBUTARY AREA IS GREATER THAN 5,000 SQUARE FEET, AND WHERE RUNOFF WILL FLOW IN A SHEET FLOW MANNER. PERIMETER EROSION CONTROL SHALL ALSO BE PROVIDED AT THE BASE OF SOIL STOCKPILES.
- THE DRAINAGE SYSTEM SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION DOWNSLOPE FROM DISTURBED AREAS. INLET PROTECTION THAT REDUCES SEDIMENT LOADING, WHILE ALLOWING RUNOFF TO ENTER THE INLET SHALL BE REQUIRED FOR ALL STORM SEWERS. CHECK DAMS, OR AN EQUIVALENT CONTROL MEASURE, SHALL BE REQUIRED FOR ALL CHANNELS. FILTER FABRIC INLET PROTECTION AND STRAW BALE DITCH CHECKS ARE NOT ACCEPTABLE CONTROL MEASURES.
- IF DEWATERING SERVICES ARE USED, ADJOINING PROPERTIES AND DISCHARGE LOCATIONS SHALL BE PROTECTED FROM EROSION. DISCHARGES SHALL BE ROUTED THROUGH AN EFFECTIVE SEDIMENT CONTROL MEASURE (E.G., SEDIMENT TRAP, SEDIMENT BASIN, OR OTHER APPROPRIATE MEASURES). THE ENGINEER SHALL BE NOTIFIED PRIOR TO THE COMMENCEMENT OF DEWATERING ACTIVITIES.
- ALL TEMPORARY SOIL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN THIRTY (30) DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED. TRAPPED SEDIMENT AND OTHER DISTURBED SOIL AREAS SHALL BE PERMANENTLY STABILIZED.

- STOCKPILED SOIL AND MATERIALS SHALL BE REMOVED FROM FLOOD HAZARD AREAS AT THE END OF EACH WORK DAY.
- EFFECTIVE CONTROL MEASURES SHALL BE UTILIZED TO MINIMIZE THE DISCHARGE OF POLLUTANTS FROM THE DEVELOPMENT SITE. AT A MINIMUM, CONTROL MEASURES SHALL BE IMPLEMENTED IN ORDER TO:
 - MINIMIZE THE DISCHARGE OF POLLUTANTS FROM EQUIPMENT AND VEHICLE WASHING, WHEEL WASH WATER, AND OTHER WASH WATER.
- MINIMIZE THE EXPOSURE OF BUILDING MATERIALS, BUILDING PRODUCTS, CONSTRUCTION WASTES, TRASH, LANDSCAPE MATERIALS, FERTILIZERS, PESTICIDES, HERBICIDES, DETERGENTS, VEHICLE FLUIDS, SANITARY WASTE, AND OTHER MATERIALS PRESENT ON THE DEVELOPMENT SITE TO PRECIPITATION AND TO STORM WATER.
- ADEQUATE RECEPTACLES SHALL BE PROVIDED FOR THE DEPOSITION OF ALL
 - CONSTRUCTION MATERIAL DEBRIS GENERATED DURING THE DEVELOPMENT PROCESS. THE CONTRACTOR SHALL NOT CAUSE OR PERMIT THE DUMPING, DEPOSITING, DROPPING, THROWING, DISCARDING OR LEAVING OF CONSTRUCTION MATERIAL DEBRIS UPON OR INTO ANY DEVELOPMENT SITE. THE DEVELOPMENT SITE SHALL BE MAINTAINED FREE OF CONSTRUCTION MATERIAL DEBRIS.
- A STABILIZED MAT OF AGGREGATE UNDERLAIN WITH FILTER CLOTH (OR OTHER APPROPRIATE MEASURES) SHALL BE LOCATED AT ANY POINT WHERE TRAFFIC WILL BE ENTERING OR LEAVING A CONSTRUCTION-SITE OF A MAJOR DEVELOPMENT TO OR FROM A PUBLIC RIGHT-OF-WAY, STREET ALLEY, OR PARKING AREA. ANY SEDIMENT OR SOIL REACHING AN IMPROVED PUBLIC RIGHT OF WAY, STREET, ALLEY OR PARKING AREA SHALL BE SCRAPED OR STREET CLEANED AS ACCUMULATIONS WARRANT AND TRANSPORTED TO A CONTROLLED SEDIMENT DISPOSAL AREA.
- ALL TEMPORARY AND PERMANENT EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED IN AN EFFECTIVE WORKING CONDITION.
- DRAIN TILE SYSTEMS DISTURBED DURING DEVELOPMENT MUST BE RECONNECTED BY THOSE RESPONSIBLE FOR THEIR DISTURBANCE UNLESS THE APPROVED ENGINEERING PLANS INDICATE HOW THE DRAIN TILE SYSTEM IS TO BE CONNECTED TO THE PROPOSED STORM WATER MANAGEMENT SYSTEM.
- ALL ABANDONED DRAIN TILES SHALL BE REMOVED IN THEIR ENTIRETY.
- DRAIN TILES WITHIN THE DISTURBED AREA OF THE DEVELOPMENT SHALL BE REPLACED, BYPASSED AROUND THE DEVELOPMENT OR INTERCEPTED AND CONNECTED TO THE DRAINAGE SYSTEM FOR THE DEVELOPMENT. THE SIZE OF THE REPLACED OR BYPASSED DRAIN TILE SHALL BE EQUIVALENT TO THE EXISTING DRAIN TILE.
- IN BUFFERS AND WETLANDS, THE EXCAVATED AREAS SHALL BE BACKFILLED WITH NATIVE SOIL IN THE SAME STRATIFICATION IN WHICH THE SOIL WAS REMOVED.
- THE CONDITION OF THE CONSTRUCTION SITE FOR WINTER SHUTDOWN SHALL BE ADDRESSED EARLY IN THE FALL GROWING SEASON SO THAT SLOPES AND OTHER BARE EARTH AREAS MAY BE STABILIZED WITH TEMPORARY AND/OR PERMANENT VEGETATIVE COVER FOR PROPER EROSION AND SEDIMENTATION CONTROL. ALL OPEN AREAS THAT ARE TO REMAIN IDLE THROUGHOUT THE WINTER SHALL RECEIVE TEMPORARY EROSION CONTROL PRACTICES INCLUDING TEMPORARY SEEDING, MULCHING AND/OR EROSION CONTROL BLANKET PRIOR TO THE END OF THE FALL GROWING SEASON. THE AREAS TO BE WORKED BEYOND THE END OF THE GROWING SEASON MUST INCORPORATE SOIL STABILIZATION PRACTICES THAT DO NOT RELY ON VEGETATIVE COVER SUCH AS EROSION CONTROL BLANKET AND HEAVY MULCHING.

STANDARD NOTES:

- UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CONSTRUCTED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS IN THE ILLINOIS URBAN MANUAL LATEST EDITION.
- A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.
- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION.
- ALL DEWATERING OPERATIONS MUST FOLLOW THE ILLINOIS URBAN MANUAL PRACTICE STANDARD 813. DURING DEWATERING OPERATIONS, WATER WILL BE FILTERED OR PUMPED INTO SEDIMENT BASINS OR SILT TRAPS. DEWATERING DIRECTLY INTO FIELD TILES OR STORM WATER STRUCTURES IS PROHIBITED.
- IT IS THE RESPONSIBILITY OF THE LANDOWNER AND/OR GENERAL CONTRACTOR TO INFORM ANY SUB-CONTRACTOR(S) WHO MAY PERFORM WORK ON THIS PROJECT, OF THE REQUIREMENTS IN IMPLEMENTING AND MAINTAINING THESE EROSION CONTROL PLANS AND ASSURE COMPLIANCE WITH ALL APPLICABLE LOCAL, STATE AND FEDERAL REGULATIONS.
- BACKUP PRACTICES AND HIGHLIGHTED QUANTITIES OF BEST MANAGEMENT PRACTICES (BMPS) OUTLINED IN THIS PLAN SHALL BE KEPT ON-SITE TO IMPLEMENT IMMEDIATE CORRECTIVE ACTIONS FOLLOWING ANY INSTANCE OF NON-COMPLIANCE.
- THE LOCAL WEATHER PROJECTIONS WILL BE CONSIDERED WHEN IMPLEMENTING THE WEEKLY CONSTRUCTION PLANS.
- ALL TRAFFIC GOING IN AND OUT OF THE CONSTRUCTION SITE SHALL BE RESTRICTED TO STABILIZED CONSTRUCTION ENTRANCES.
- ANY INLET FOUND WITHIN 50' OF A CONSTRUCTION ENTRANCE SHALL HAVE PROTECTION MECHANISMS IN PLACE.
- ALL DISTURBED GROUND DIRECTLY UPLAND OF JURISDICTIONAL AREAS SHALL RECEIVE ADEQUATE PROTECTION MEASURES AT THE CONCLUSION OF EACH WORK DAY.
- ALL DEWATERING OPERATIONS SHALL, AT MINIMUM, FOLLOW ILLINOIS URBAN MANUAL PRACTICE STANDARD 813.

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 CLIENT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:26 PM
 FILE NAME: 191806-Details
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb











USER NAME = KJENKINS	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

**CITY OF AURORA
MASTODON LAKE DREDGING PROJECT**

EROSION CONTROL NOTES

SCALE: N.T.S. SHEET NO. 01 OF 04 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	24
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

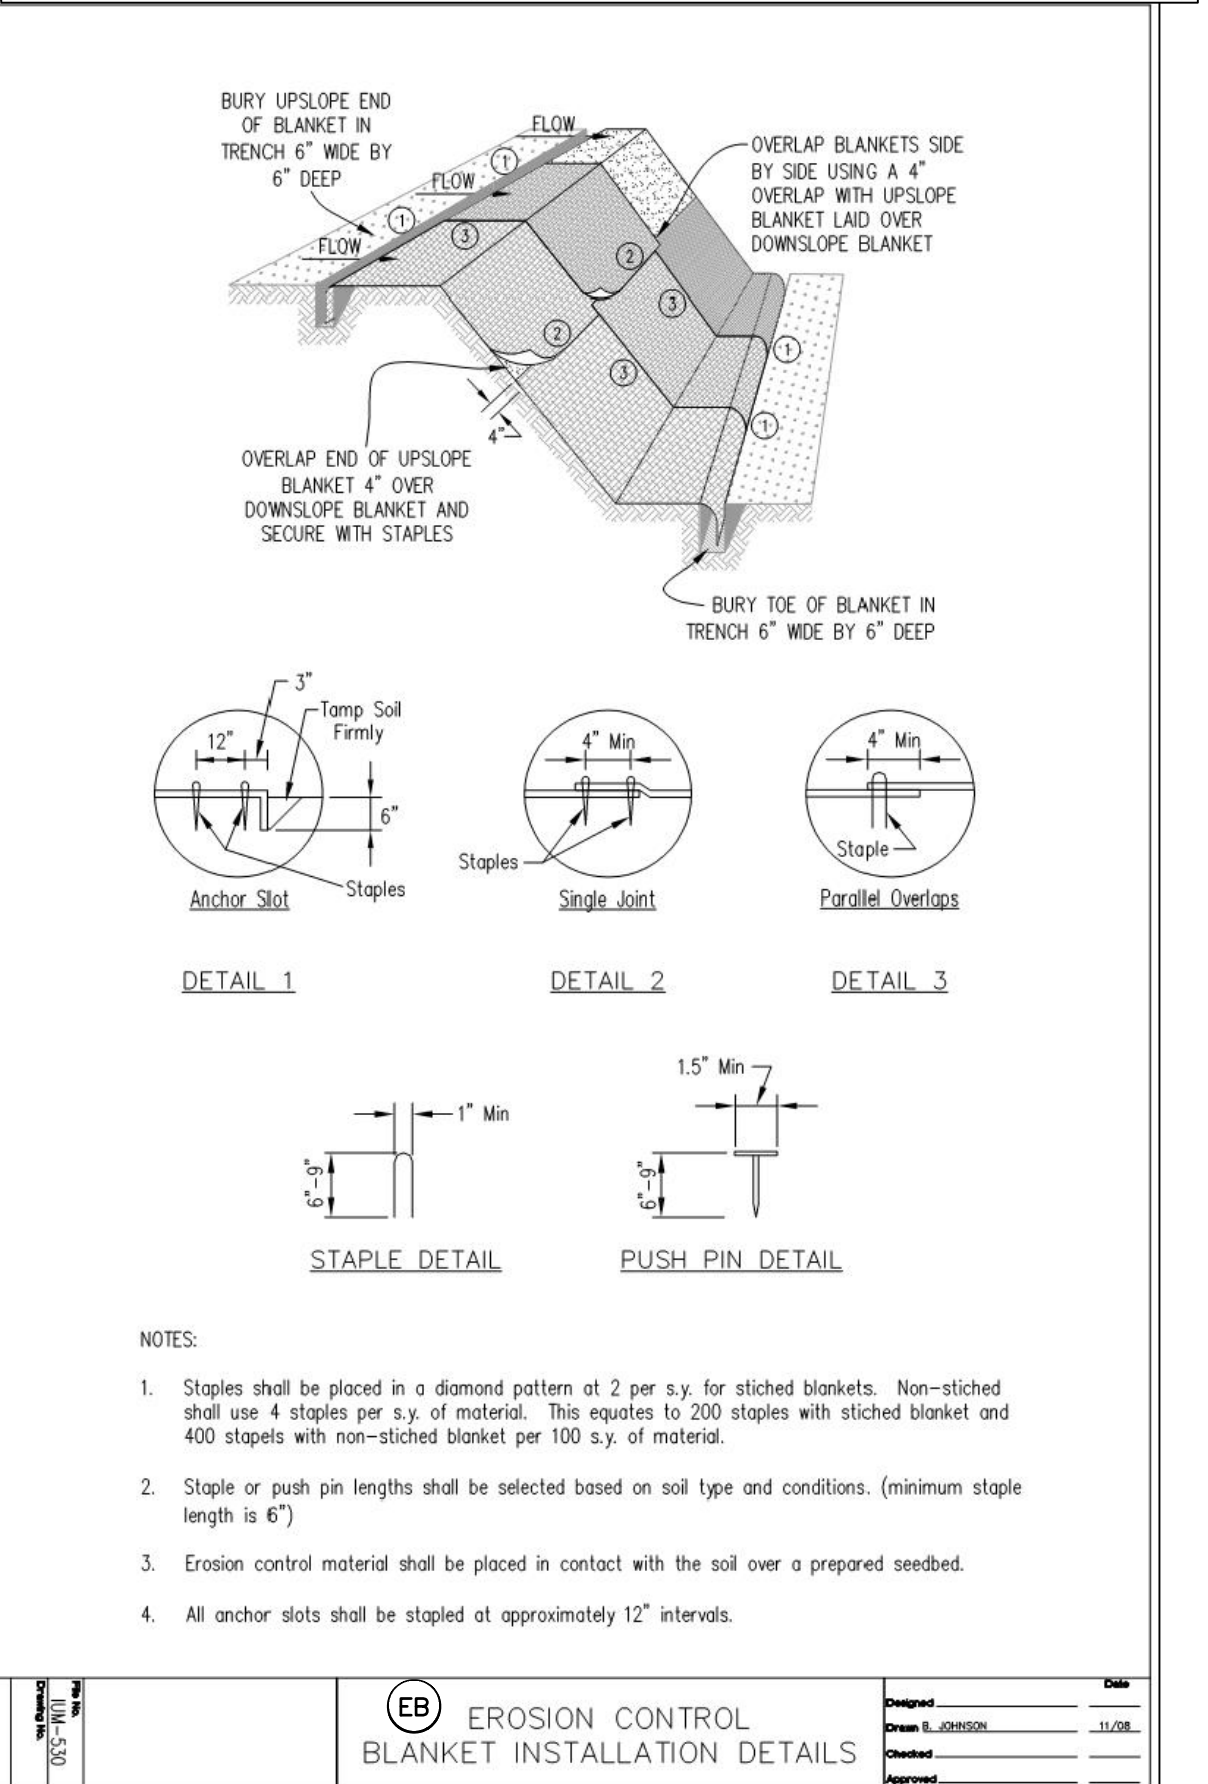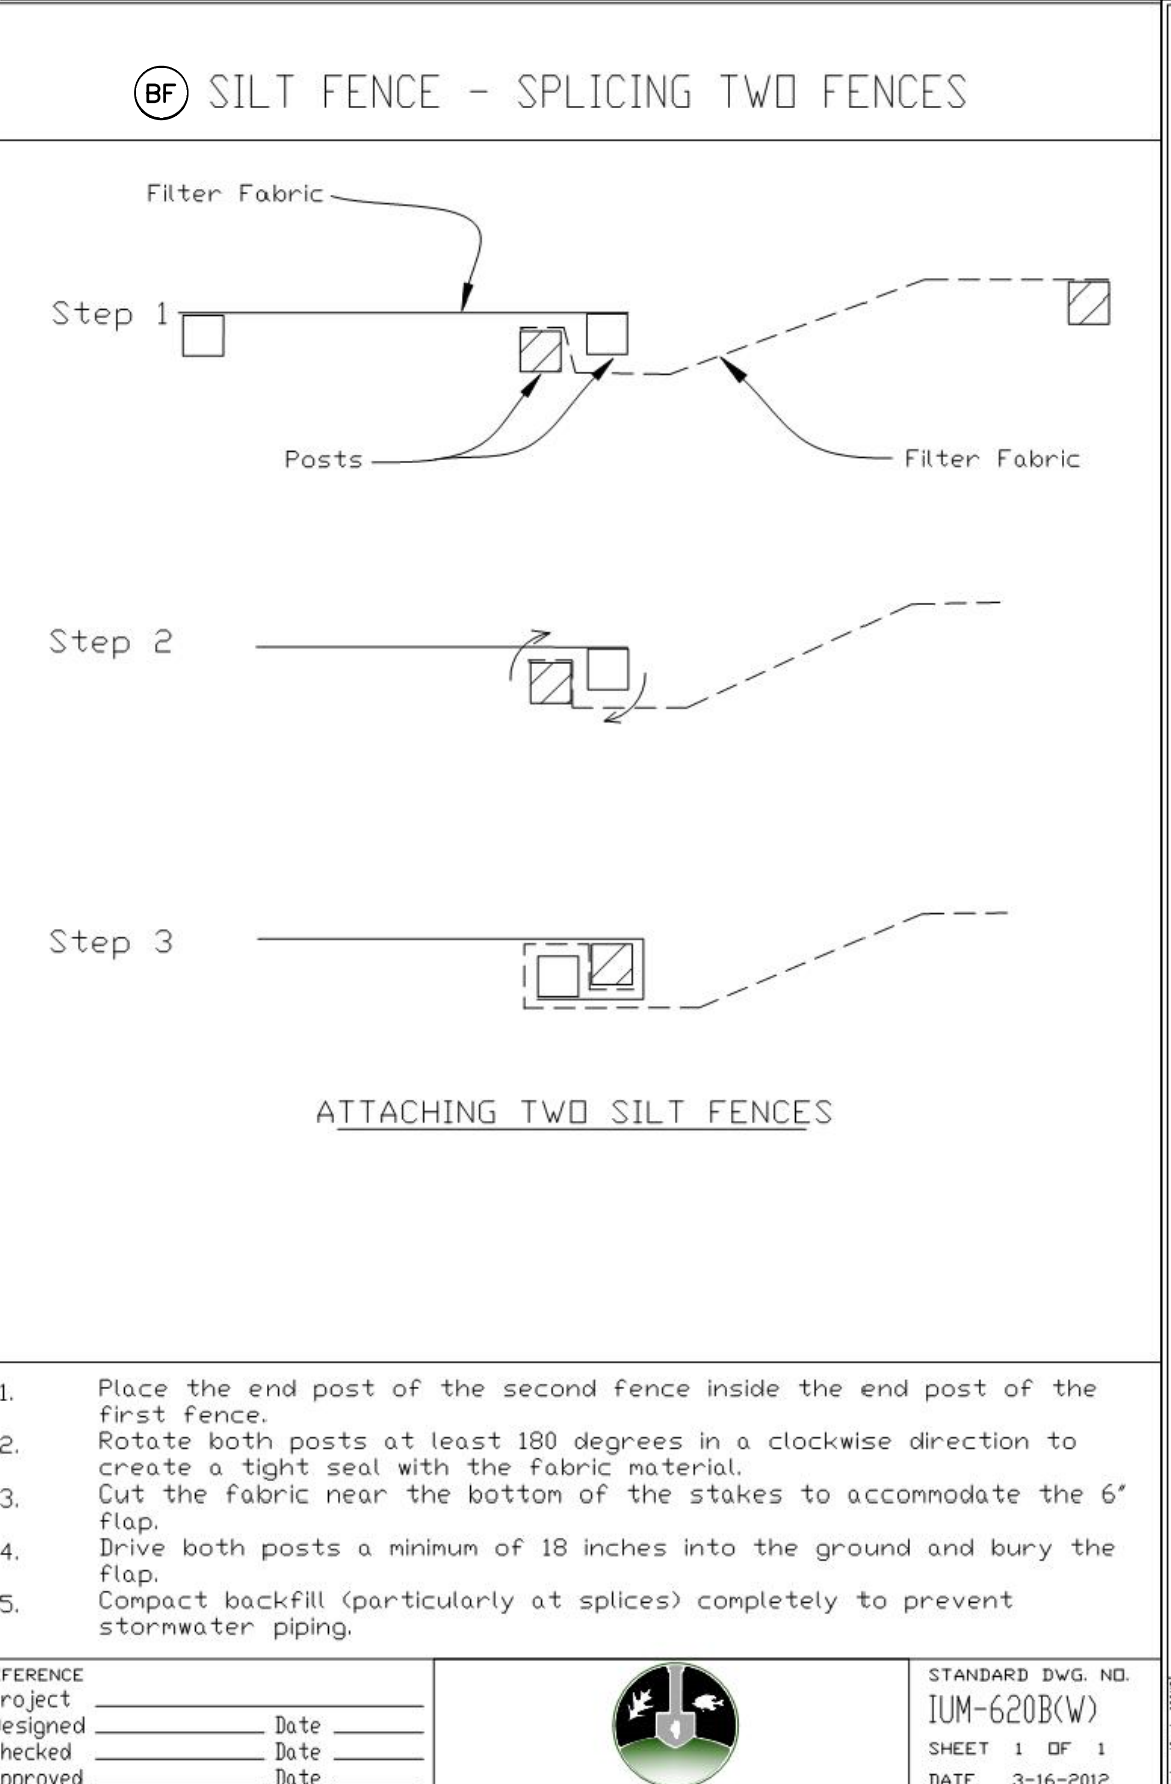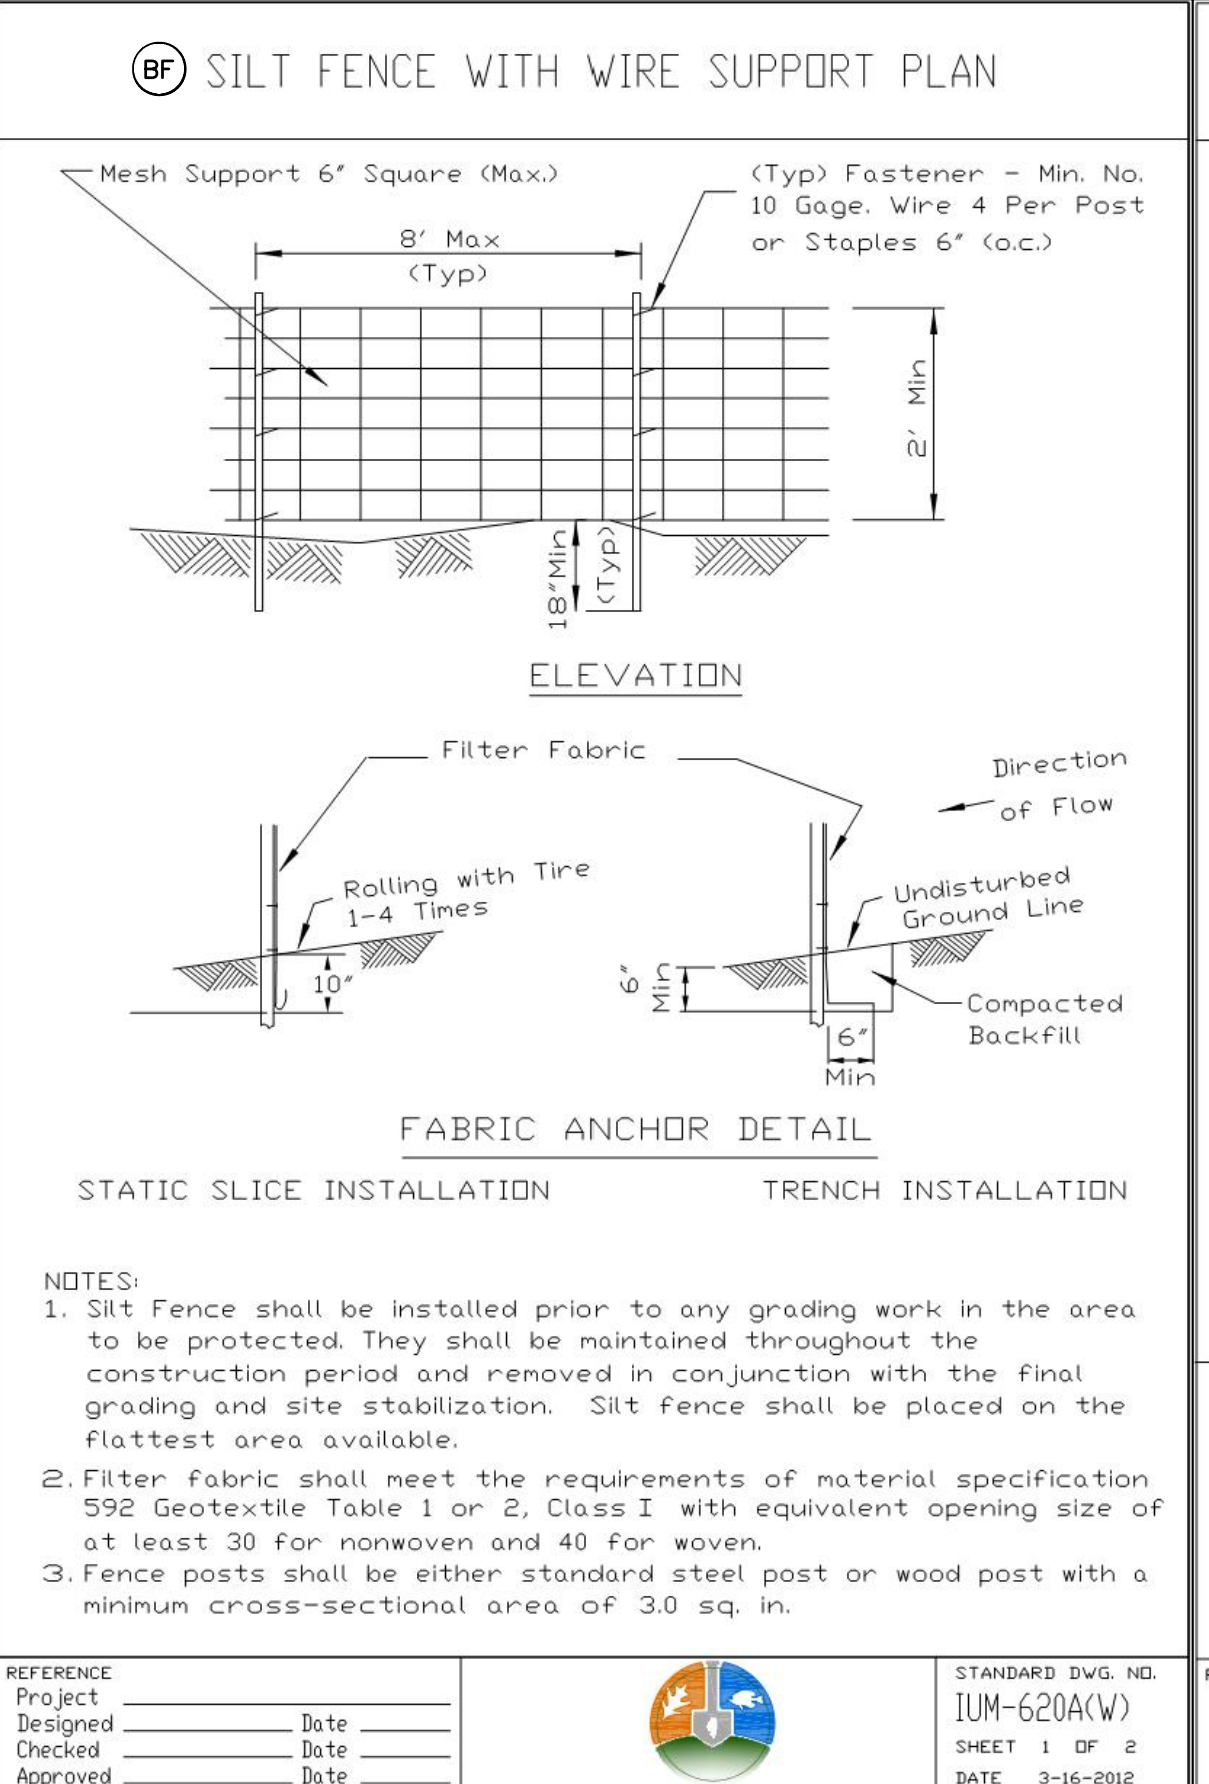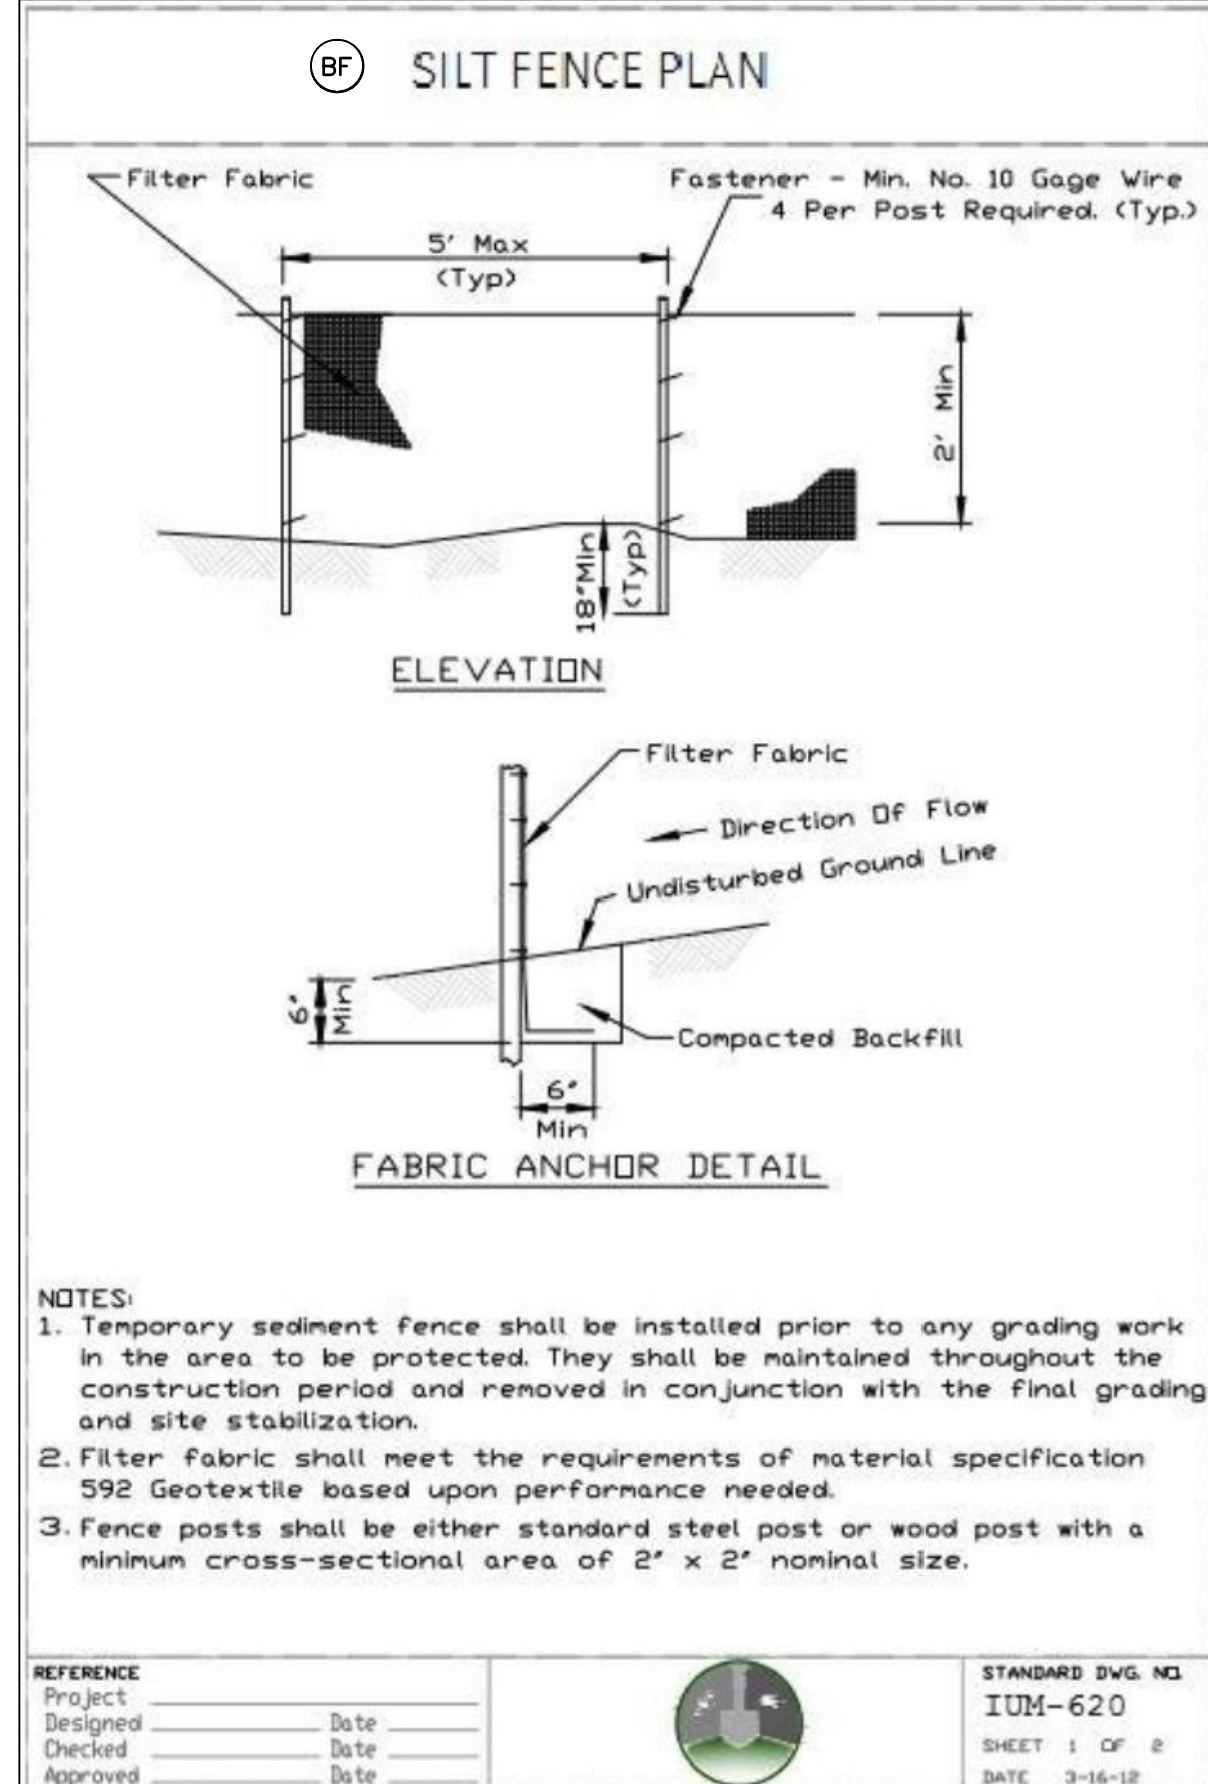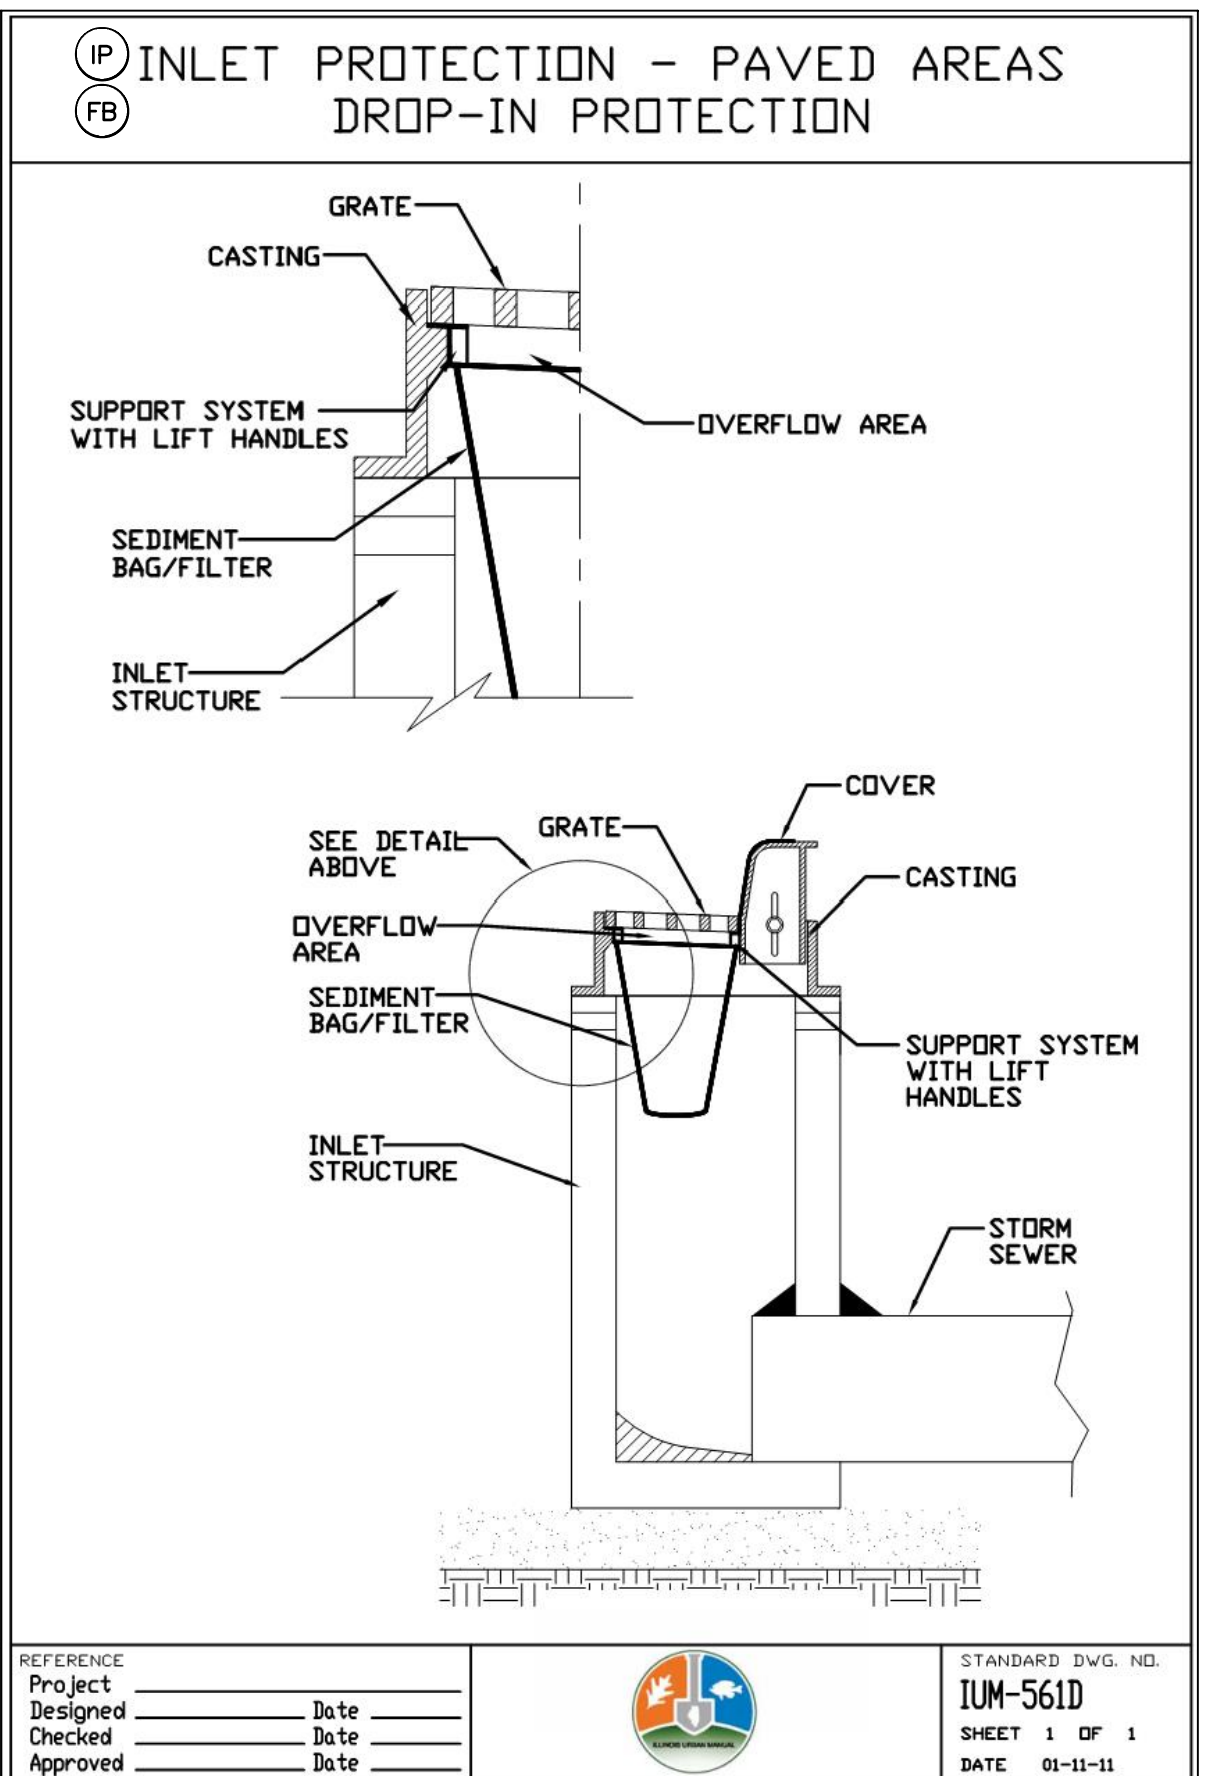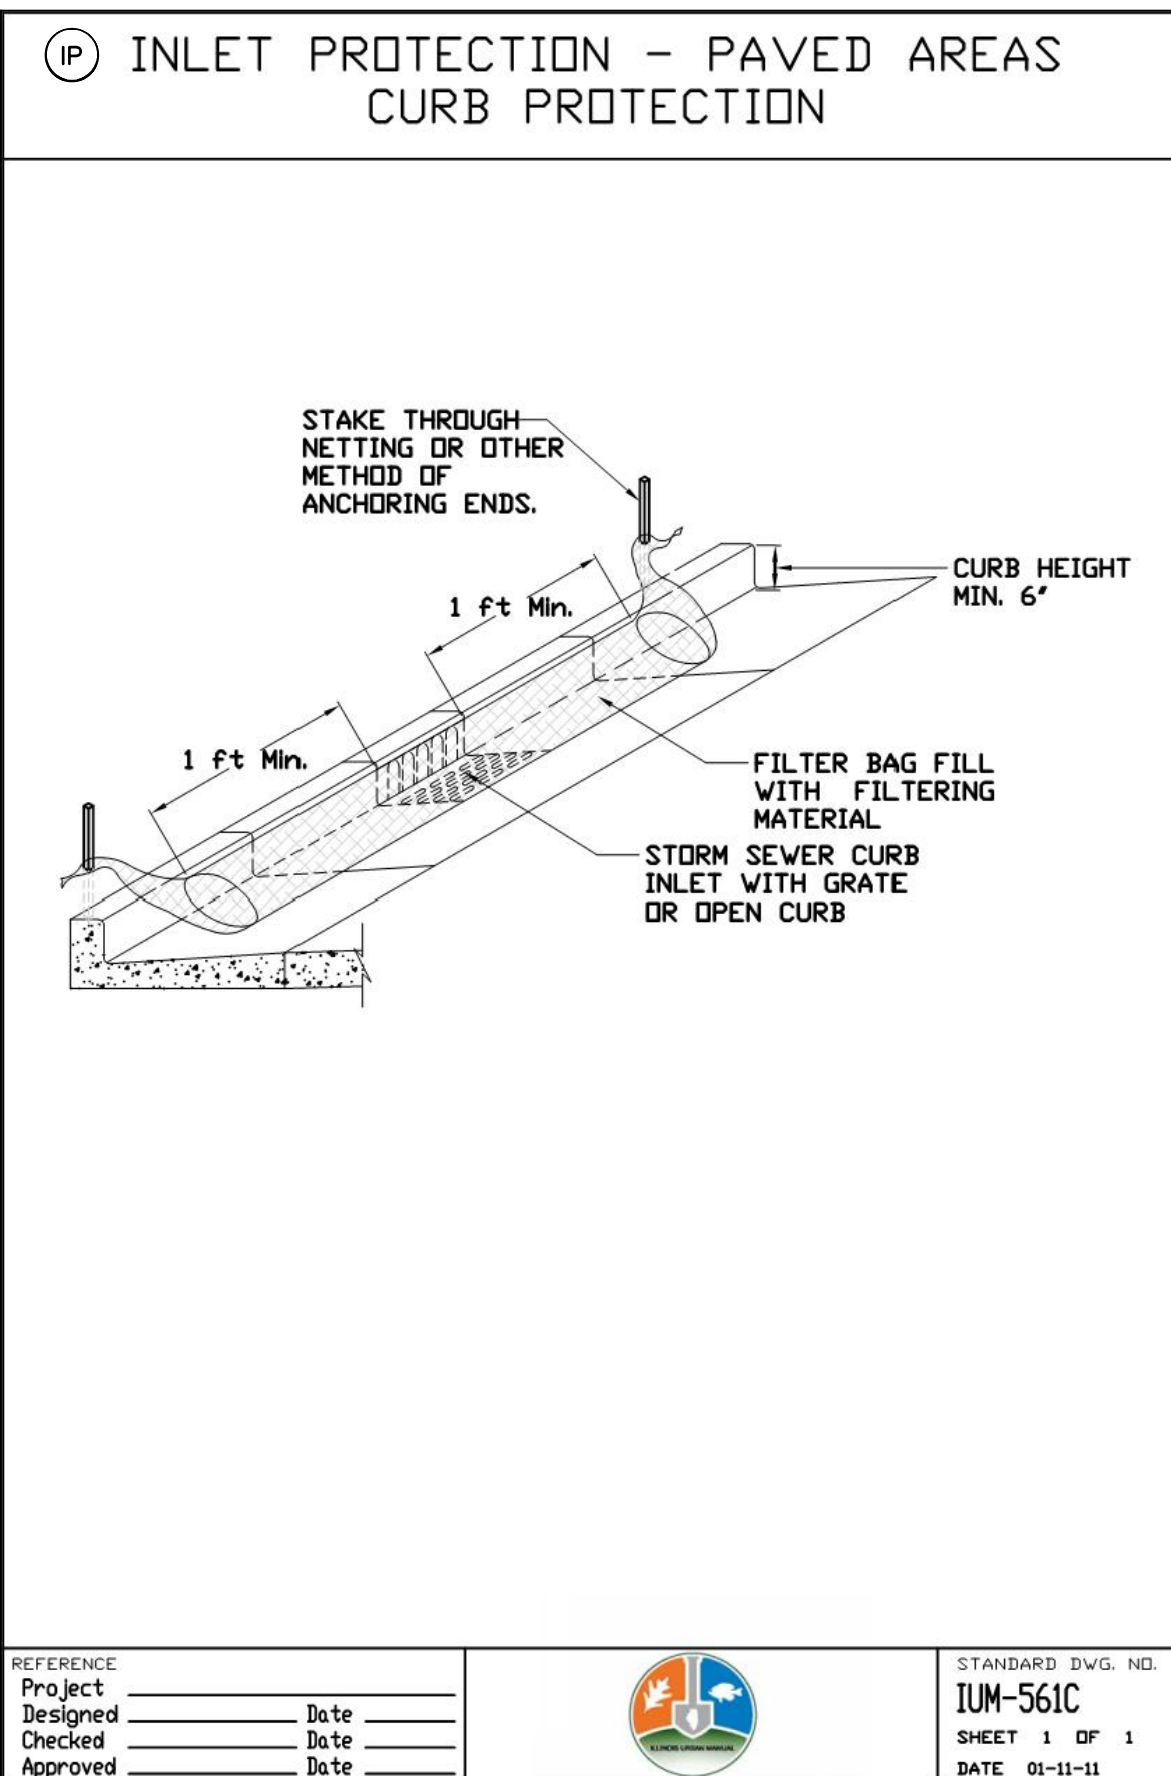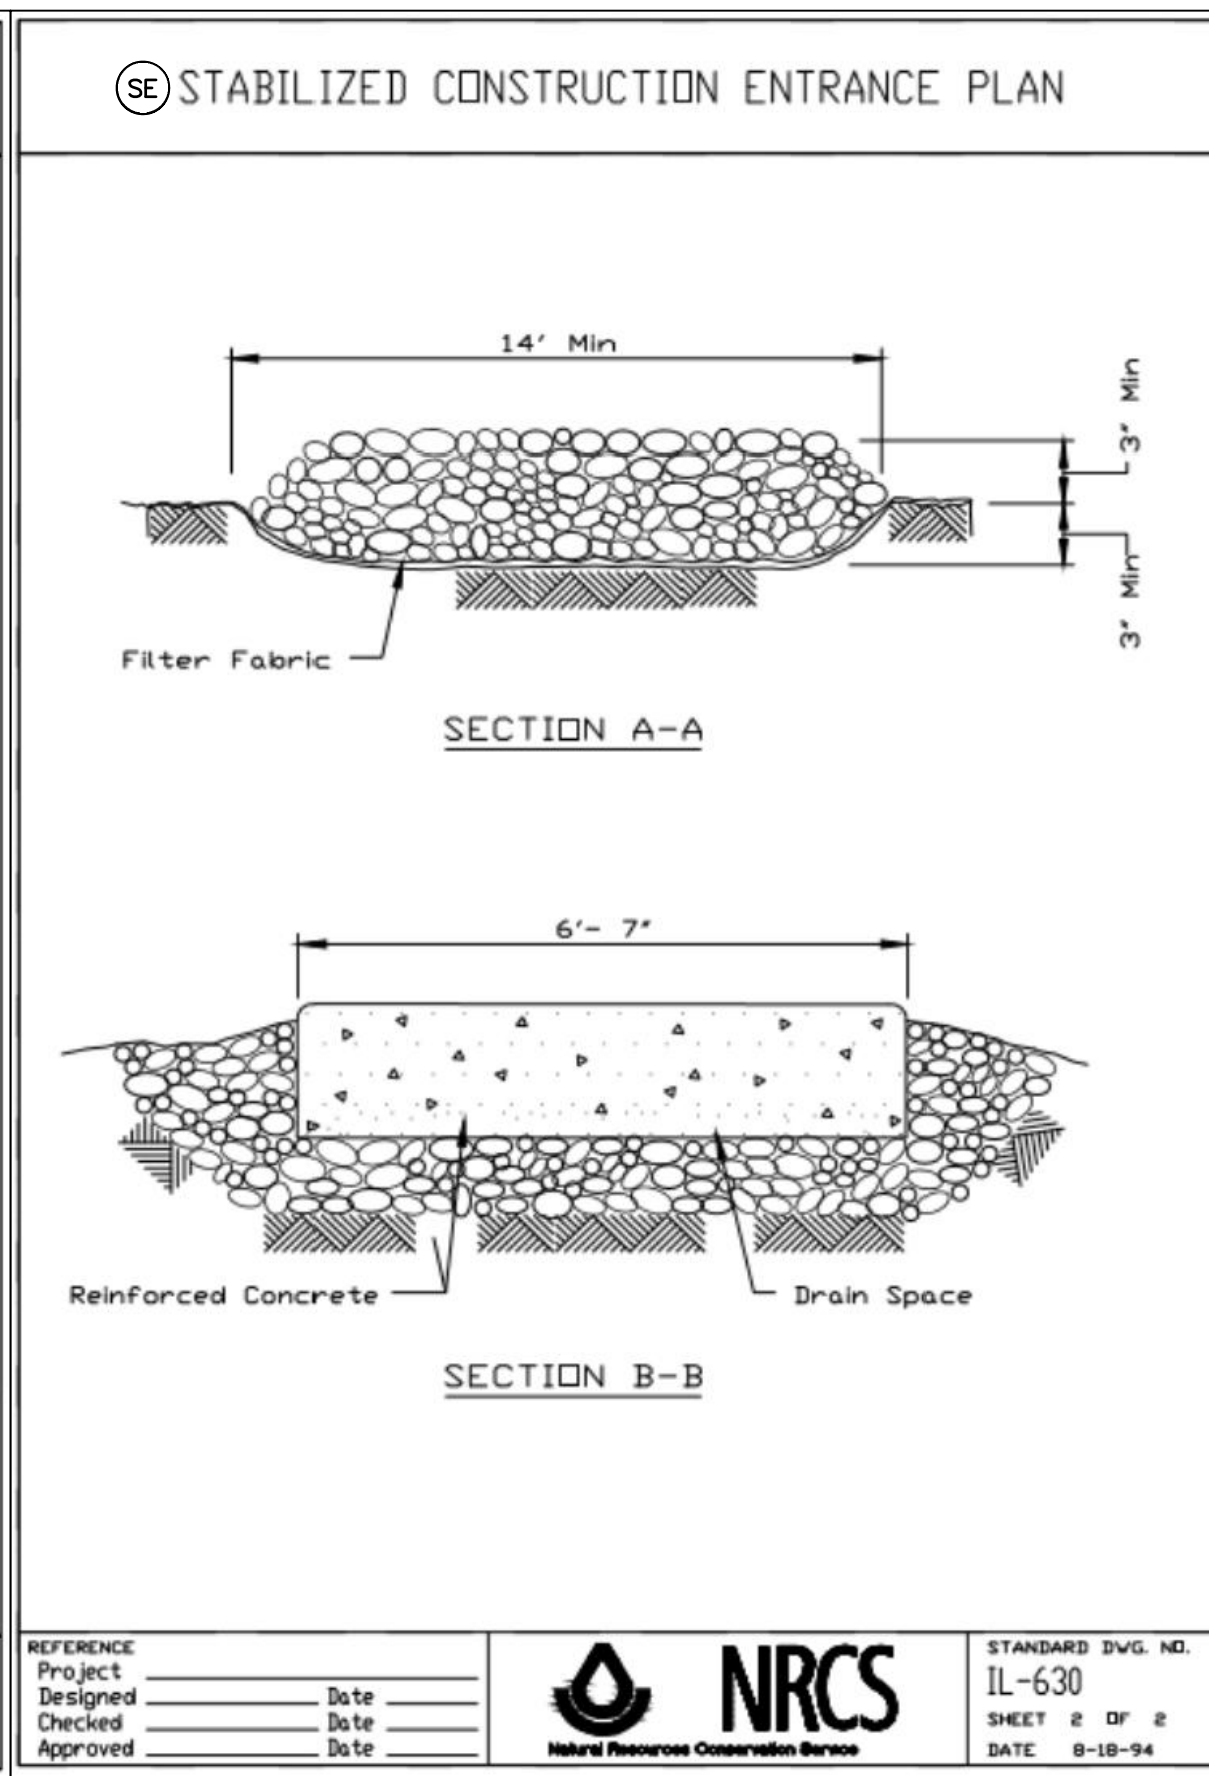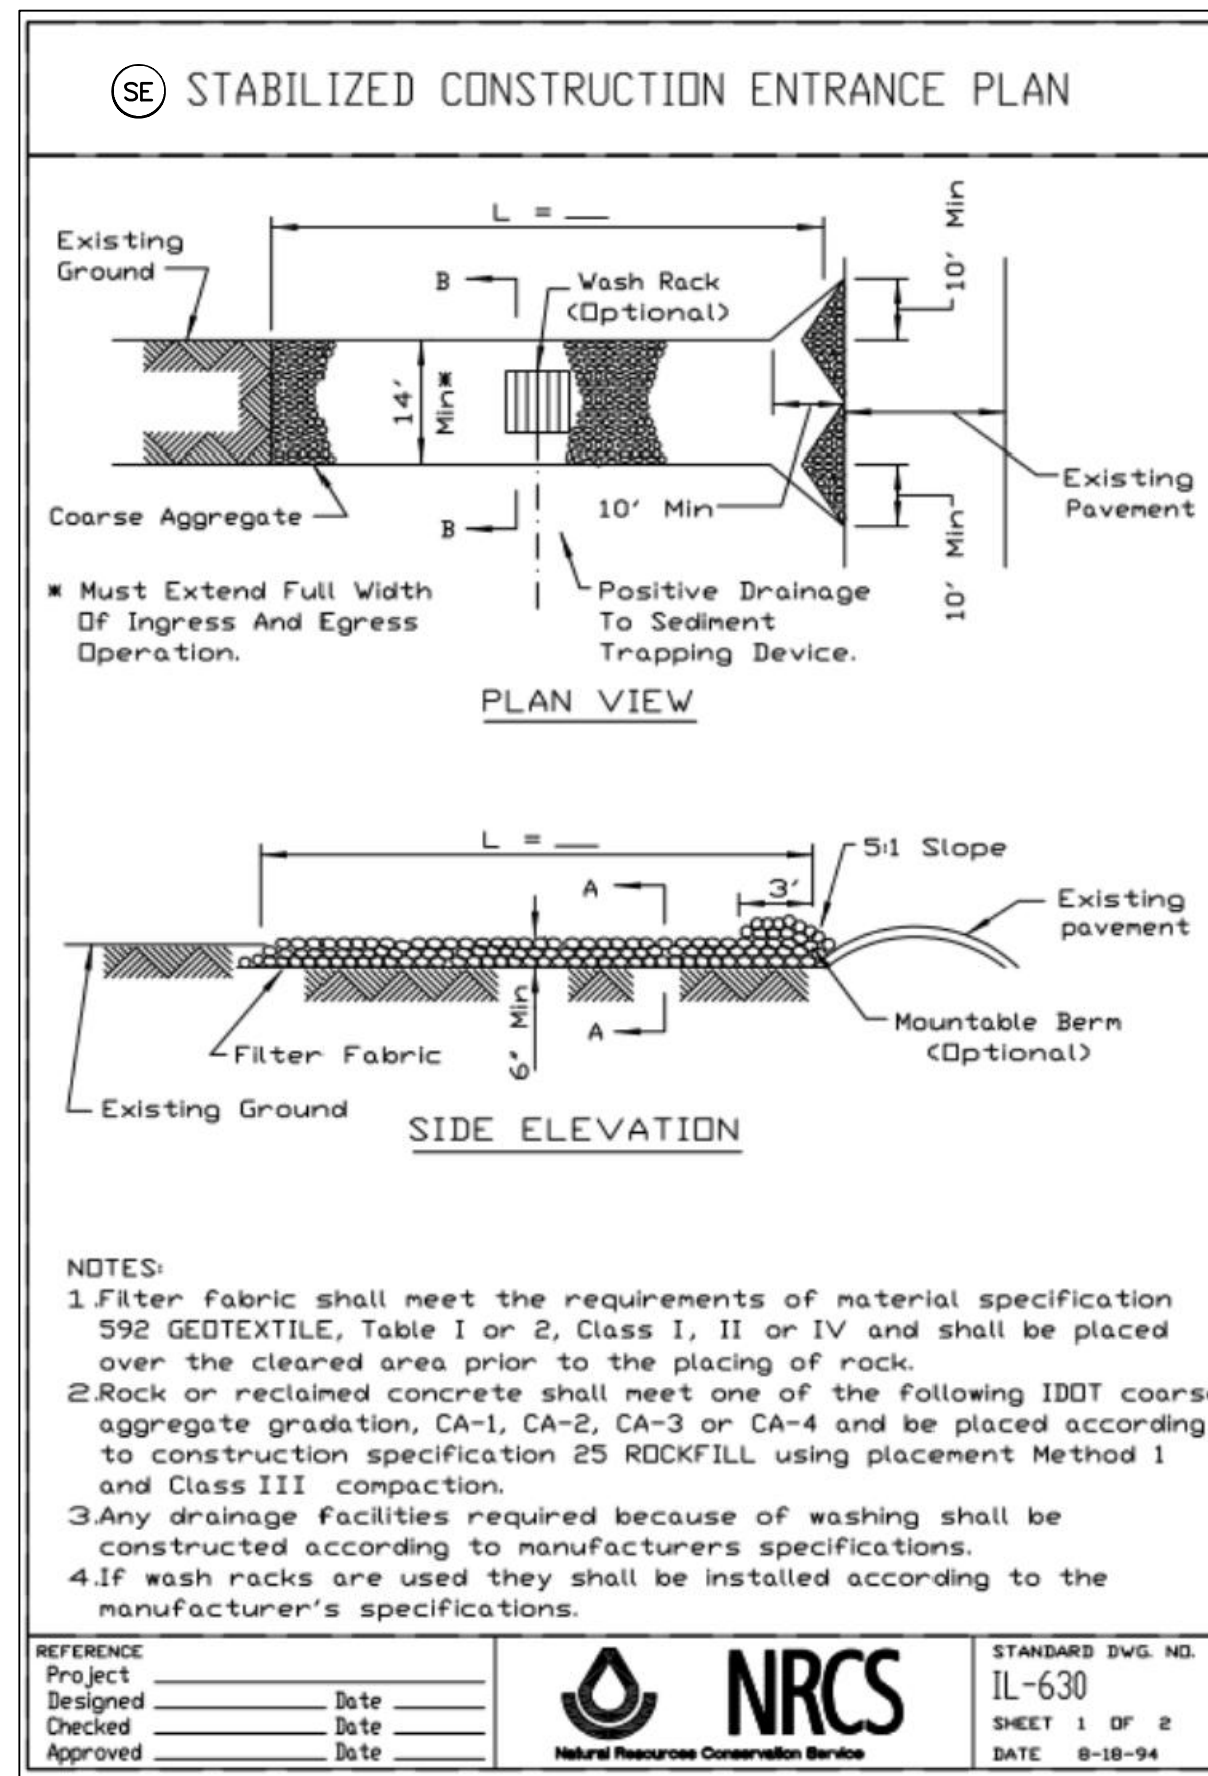

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: _____
 CLIENT: _____
 DATE PLOTTED: 2/6/2026 3:26 PM
 FILE NAME: 191806-Details
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb



USER NAME = KJENKINS	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

EROSION CONTROL DETAILS

SCALE: N.T.S. SHEET NO. 01 OF 01 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	25
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

DC ROLLED EROSION CONTROL PRODUCTS

STAKING PATTERN GUIDE

STAKE WITHIN 2" OF THE END OF WATTLE

STRAW WATTLE OR ROLLED EXCELSIOR IN 3" DEEP TRENCH

WOOD STAKE

2" OR LESS

6" MIN.

3" DEEP TRENCH

NOTES:
 1. OVERLAP MINIMUM IS THE DIAMETER OF THE ROLL.
 2. 4" SPACING FOR WATTLES.
 3. 2" SPACING FOR ROLLED EXCELSIOR.
 4. OR SPACE ACCORDING TO MANUFACTURER'S SPECIFICATIONS.

STAKE DETAIL

ROLLED EROSION CONTROL PRODUCT

WOOD STAKE (TO ONLY PENETRATE NETTING)

CHANNEL BOTTOM

3" DEEP TRENCH

NOTES:
 1. DRAWINGS ARE NOT TO SCALE.
 2. ENDS OF WATTLES OR ROLLED EXCELSIOR SHALL BE TURNED AT LEAST 6" UPSLOPE.
 3. RECOMMENDED STAKES ARE 1 1/8" WIDE x 1 1/8" THICK x 30" LONG.
 4. STAKES SHALL NOT EXTEND ABOVE THE STRAW WATTLE MORE THAN 2".
 5. SPACING: THE TOE OF THE UPSTREAM DITCH CHECK SHALL CREATE A HORIZONTAL LINE WITH THE TOP OF THE DOWNSTREAM DITCH CHECK.

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

DC SYNTHETIC POROUS RUNOFF CONTROL STRUCTURES

Front View

Road

Sideslope

Overlap

6" Min.

Toe

Ditch

Toe

Backslope

Bottom Outside Corner of Backslope Panels

4" min.

Top of Channel Panel

Overflow Spacing on Slope

Side View

Flow

Panel

Erosion Matting

Erosion Staples

Backfill

Typical Runoff Structure Spacing

Flow

Slope

Spacings: 131' / Slope %

Slope	Spacings
2:1	1
2.5:1	1.5
3:1	2
3.5:1	2
4:1	2
5:1	2.5
6:1	2.5

Minimum Installation Length up Slopes

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

TREE TRUNK PROTECTION

Side View

Protective cloth (burlap or better)

Outer bands

Banding material stapled to back of boards

2" x 8" boards (height varies)

1" maximum

8"

8'-9" (min.)

8'

6"

* Protective Cloth extension

Notes

- The contractor shall provide 2" x 8" boards banded continuously around each trunk with a protective cloth (such as burlap or better) placed between the boards and the tree to prevent scarring of the tree being protected. The height of the boards is variable due to height of tree being protected. Trees to be protected shall be shown in the plans or designated by the Professional Forester or Certified Arborist.
- The protective cloth shall extend past both the top and bottom of the boards as shown in the detail. Width of wrap material varies. For fabric that does not meet the required height, fabric shall overlap a minimum of 6" and shall be spliced to avoid slippage.

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

TREE PROTECTION - FENCING

Side View

Drip Line

1' Min.

6' Max.

40" Min.

18" Min.

Fence

Ground Surface

Post

POST AND FENCE DETAIL

NOTES:
 1. The fence shall be located a minimum of 1 foot outside the drip line of the tree to be saved and in no case closer than 5 feet to the trunk of any tree.
 2. Fence posts shall be either standard steel posts or wood posts with a minimum cross sectional area of 3.0 sq. in.
 3. The fence may be either 40" high snow fence, 40" plastic web fencing or any other material as approved by the engineer/inspector.

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

RR STONE RIP RAP DETAIL FOR ANY TAILWATER CONDITION

PIPE

STONE RIP RAP (SEE CLASS LOCATED ON PLANS)

FLARED END SECTION

TOE BLOCK

GEOFABRIC

Approx. stone size based on IDOT Std.

Class	Min. (in.)	Max. (in.)
A1	10	12
A2	12	15
A3	15	18
A4	18	24
A5	24	30
A6	30	36

LOW VELOCITY (<5fps)

D	T	L	B	Quantity SY.
10"	A2 (6")	10'	8"	8
12"	A3 (15")	12'	11"	11
15"	A3 (15")	13'	13"	13
18"	A3 (15")	14'	16"	16
21"	A3 (15")	15'	18"	18
24"	A3 (15")	16'	21"	21
27"	A3 (15")	17'	25"	25
30"	A3 (15")	18'	30"	30
33"	A4 (16")	19'	A1 (6")	32
36"	A4 (16")	20'	A1 (6")	36
42"	A4 (16")	22'	A1 (6")	44
48"	A4 (16")	24'	A1 (6")	53

HIGH VELOCITY (5-10fps)

D	T	L	B	Quantity SY.
10"	A2 (6")	10'	8"	8
12"	A3 (15")	15'	11"	16
15"	A3 (15")	15'	13"	17
18"	A4 (16")	16'	A1 (6")	20
21"	A4 (16")	16'	A1 (6")	25
24"	A4 (16")	20'	A1 (6")	31
27"	A4 (16")	21'	A1 (6")	35
30"	A4 (16")	22'	A1 (6")	39
33"	A5 (22")	23'	A1 (8")	44
36"	A5 (22")	24'	A1 (8")	48
42"	A6 (28")	26'	A2 (10")	58
48"	A6 (28")	28'	A2 (10")	68

NOTE: WHEN OUTLETING TO A DEFINED CHANNEL, WIDTH AND AREA OF APRON SHALL CONFORM TO TOP OF CHANNEL BANK

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

RR PIPE OUTLET TO CHANNEL

Pipe Outlet To Well-Defined Channel

PLAN

SECTION A-A

Filter Fabric

Bury End of Fabric 12" Min.

NOTE: 1. The filter fabric shall meet the requirements in material specification 592 GEOTEXTILE Table I or 2, Class I, II or III.
 2. The rock riprap shall meet the IDOT requirements for the following gradation.
 3. The riprap shall be placed according to construction specification 61 LOOSE ROCK RIPRAP. The rock may be equipment placed.

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

FLOATING SILT CURTAIN - TYPICAL LAYOUT

FLDAT

LOAD LINE

MOORING CABLE - ATTACHED TO LOADLINE BETWEEN PANELS

CROWN BODY

ISOLATED WORK AREA

FLOATING SILT CURTAIN

ANCHOR LINE

ANCHOR

BALLAST CHAIN

CHAIN

TYPICAL COMPONENTS / ANCHORAGE SYSTEM

TYPICAL PLAN VIEW

HIGH WATER LEVEL

NORMAL WATER LEVEL

WORK AREA

ANCHOR FLOATING SILT CURTAIN, AS REQUIRED

SECURE SILT CURTAIN BEYOND HIGH WATER LINE

LESS THAN 1/3 OF WATERCOURSE WIDTH

Maximum flow for waterbody shall be less than 5fps.
 Isolated work area shall not exceed more than 1/3 stream width.
 Silt curtain shall be placed parallel to stream flow.

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

FLOATING SILT CURTAIN - PANEL CONNECTORS

FLDAT

LOAD LINE

MOORING CABLE - ATTACHED TO LOADLINE BETWEEN PANELS

MIN. TWO LINES OF STITCHING

SEWN SEAM

BARRIER FABRIC

BALLAST CHAIN

SEWN SEAM BALLAST CHAIN SLEEVE

SEWN SEAM

ROPE LACING

FLDATION

DEPTH ACCORDING TO NEED

ALL SEAMS SEWN

BARRIER FABRIC

BALLAST CHAIN

GROMMETED HOLES WITH ROPE LACING

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen
 DATE PLOTTED: 2/6/2026 3:26 PM
 CLIENT: 191806-Details
 FILE NAME: DWG To PDF.pc3
 PLOT DRIVER: SEC-Standard.ctb
 PEN TABLE:

HRGreen.com
 Illinois Professional Design Firm
 #184.001322

USER NAME = KJENKINS	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -





CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

SCALE: N.T.S. SHEET NO. 03 OF 04 SHEETS STA. TO STA.

EROSION CONTROL DETAILS

REFERENCE: Project _____ Date _____
 Designed _____ Date _____
 Checked _____ Date _____
 Approved _____ Date _____

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	26
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

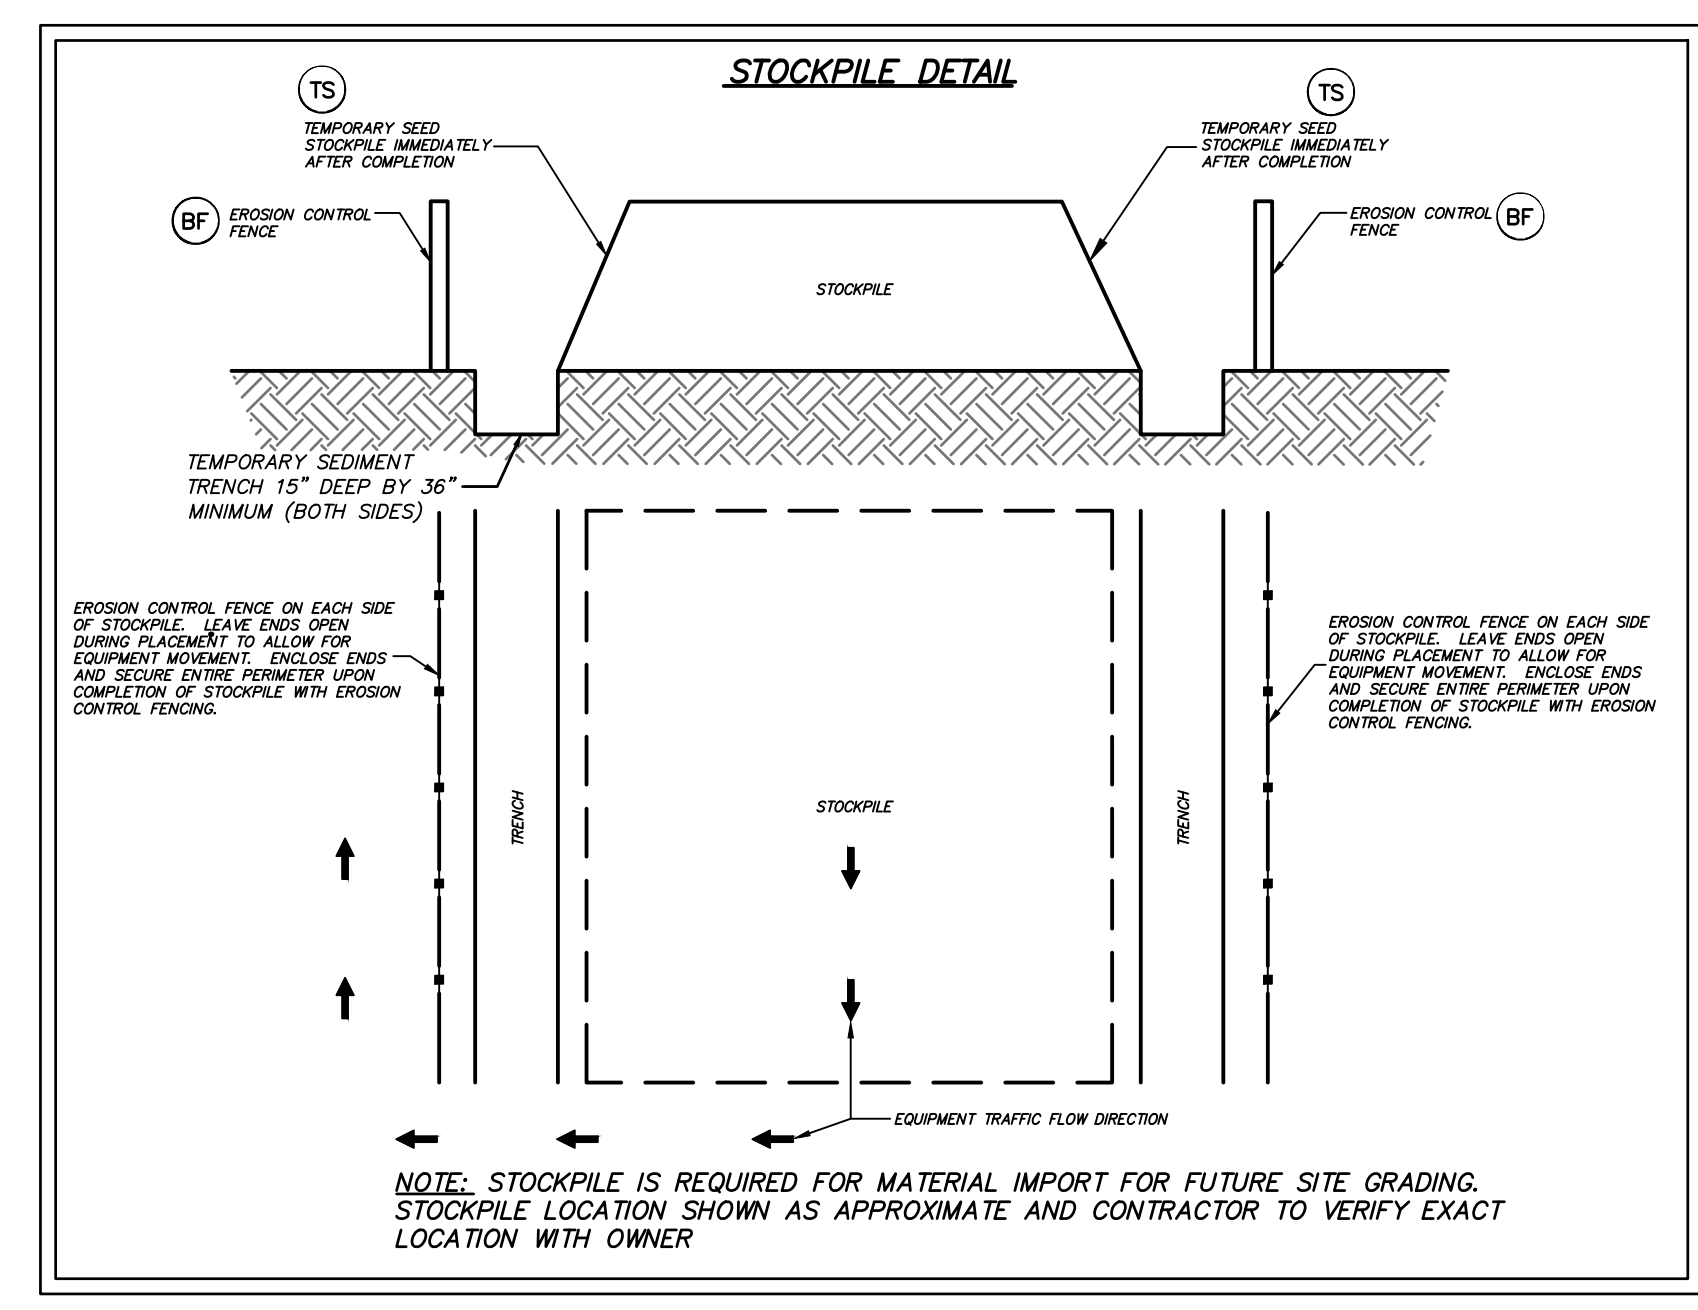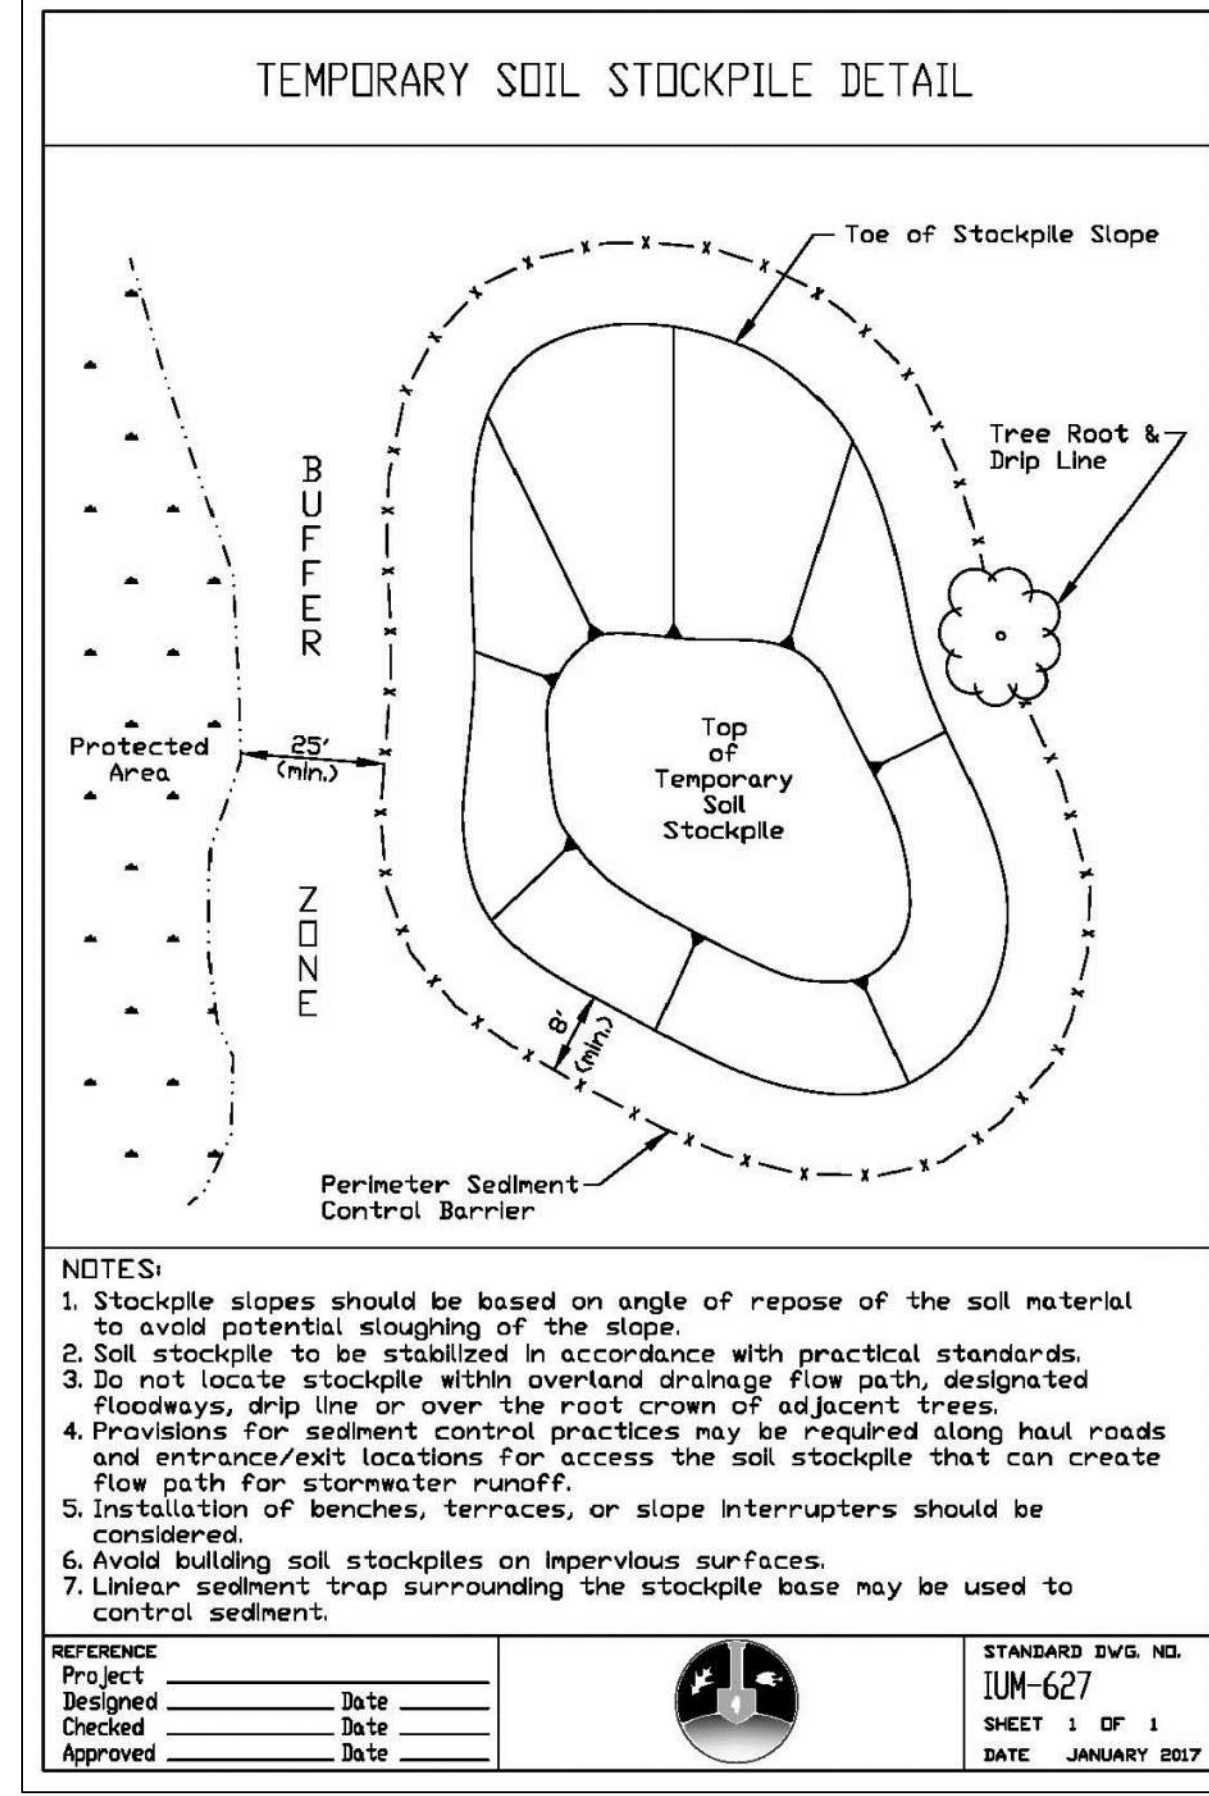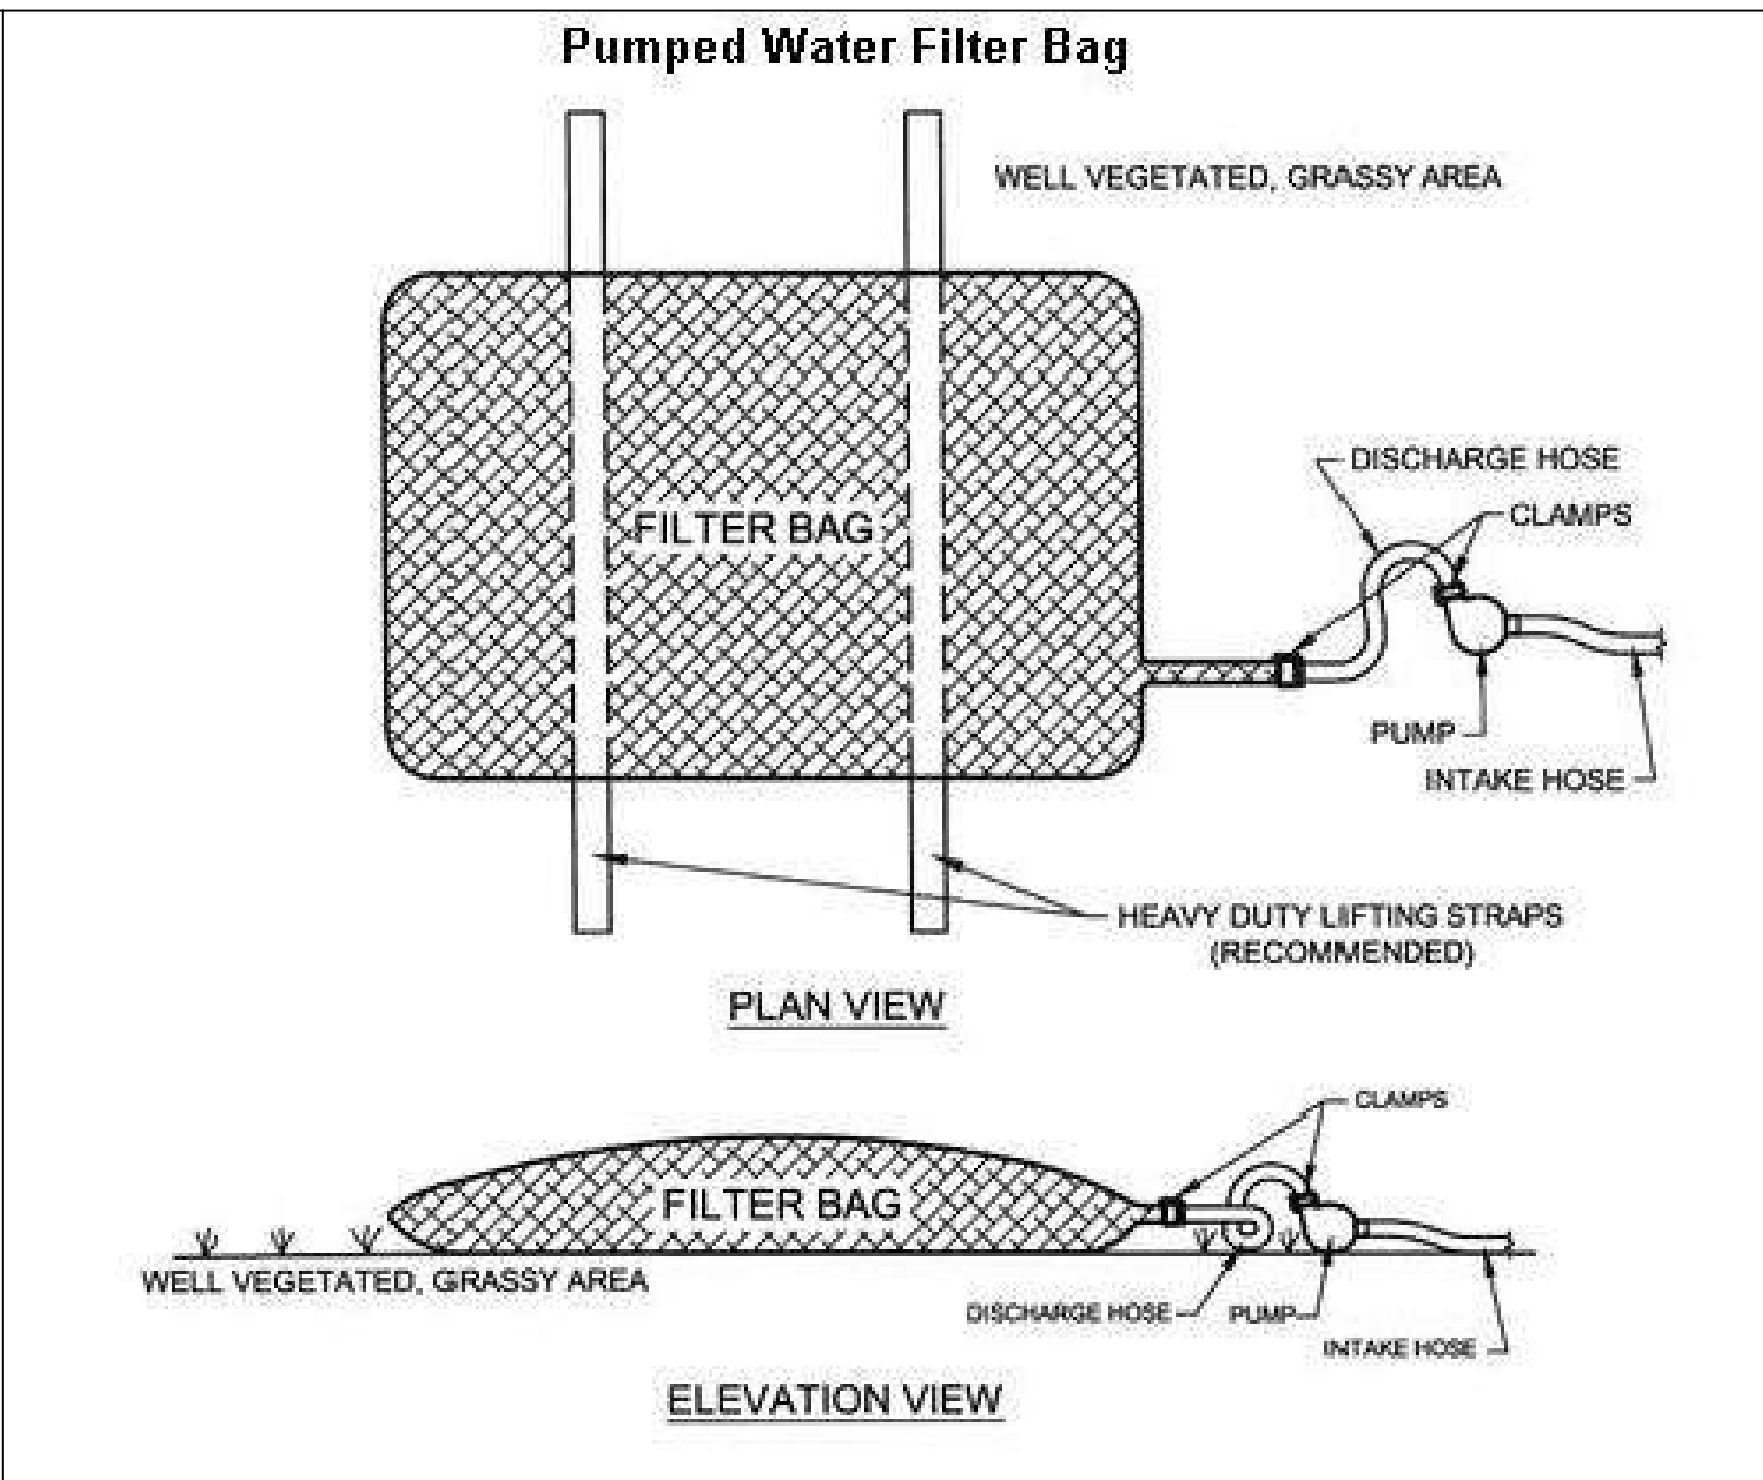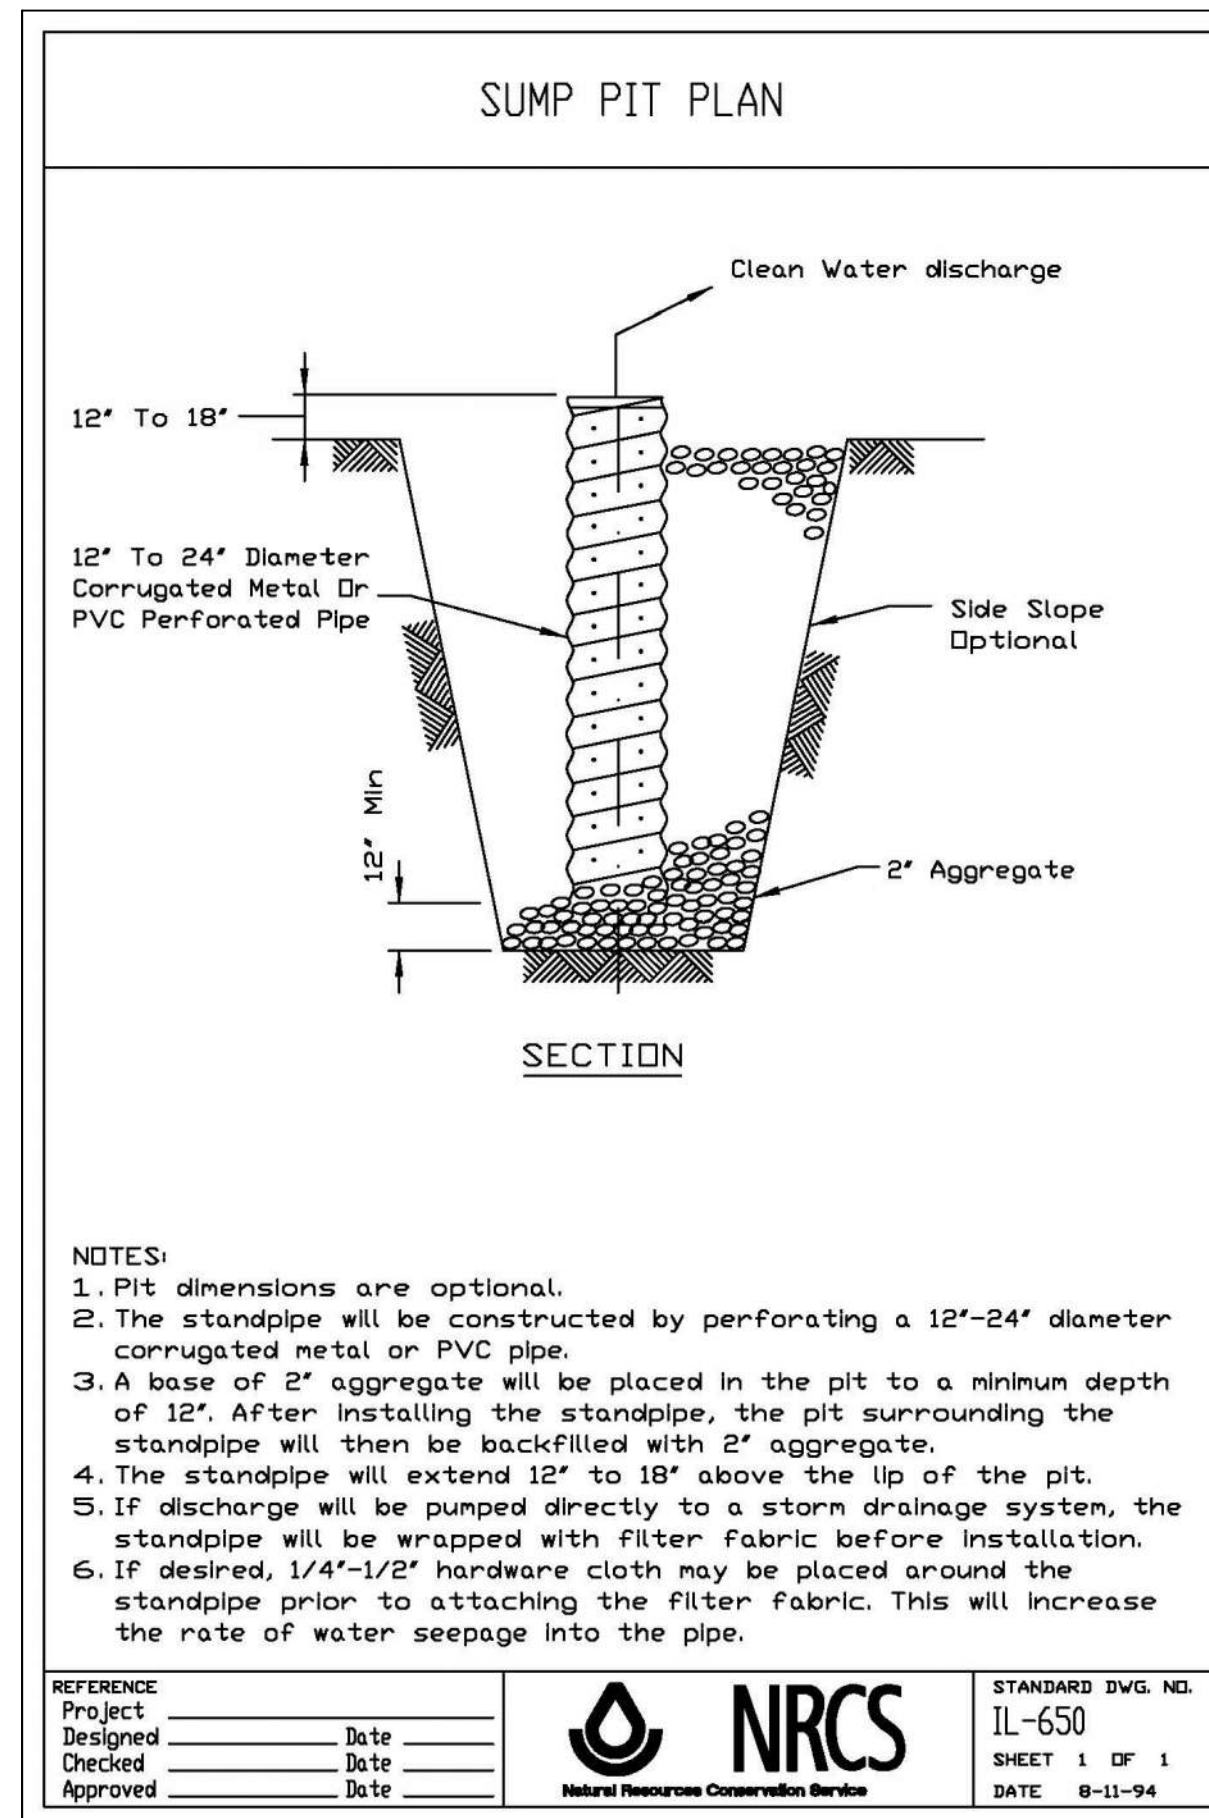

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:26 PM
 CLIENT: 191806-Details
 FILE NAME: 191806-Details
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb





USER NAME = KJENKINS	DESIGNED - LRG	REVISED -	
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -	
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -	
PLOT DATE = 2/6/2026	DATE -	REVISED -	

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

EROSION CONTROL DETAILS

SCALE: N.T.S. SHEET NO. 04 OF 04 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	27
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

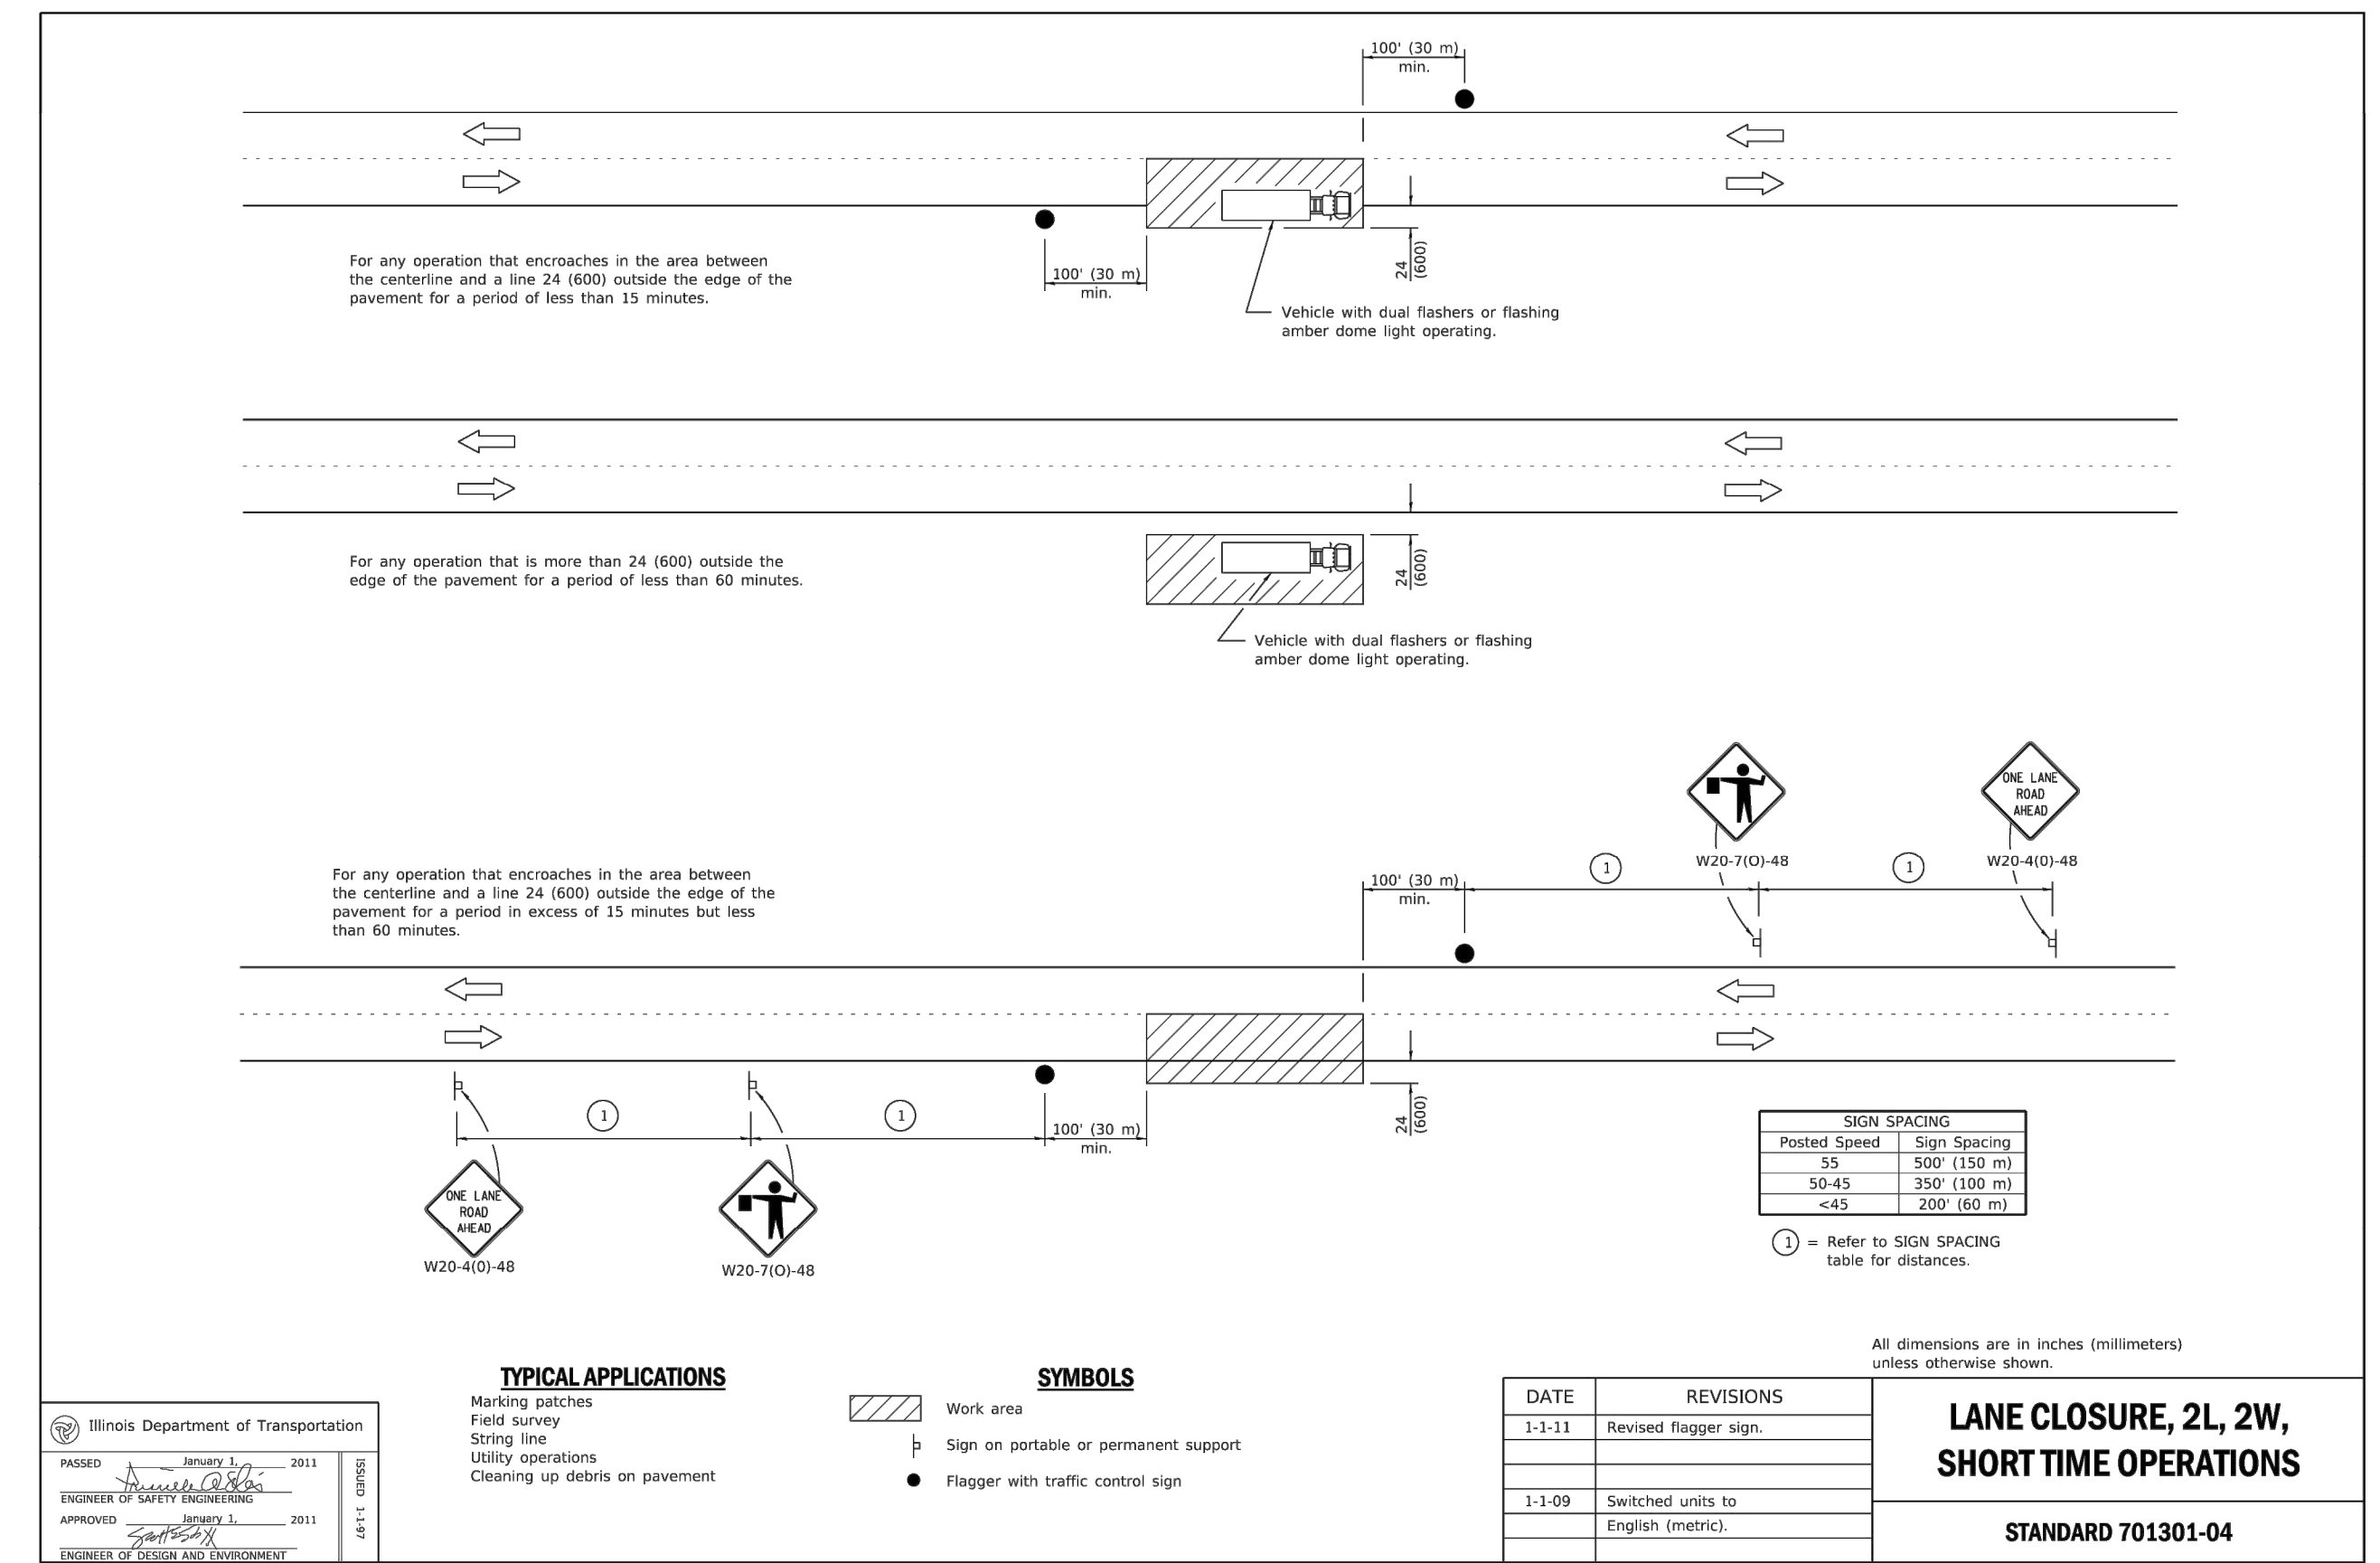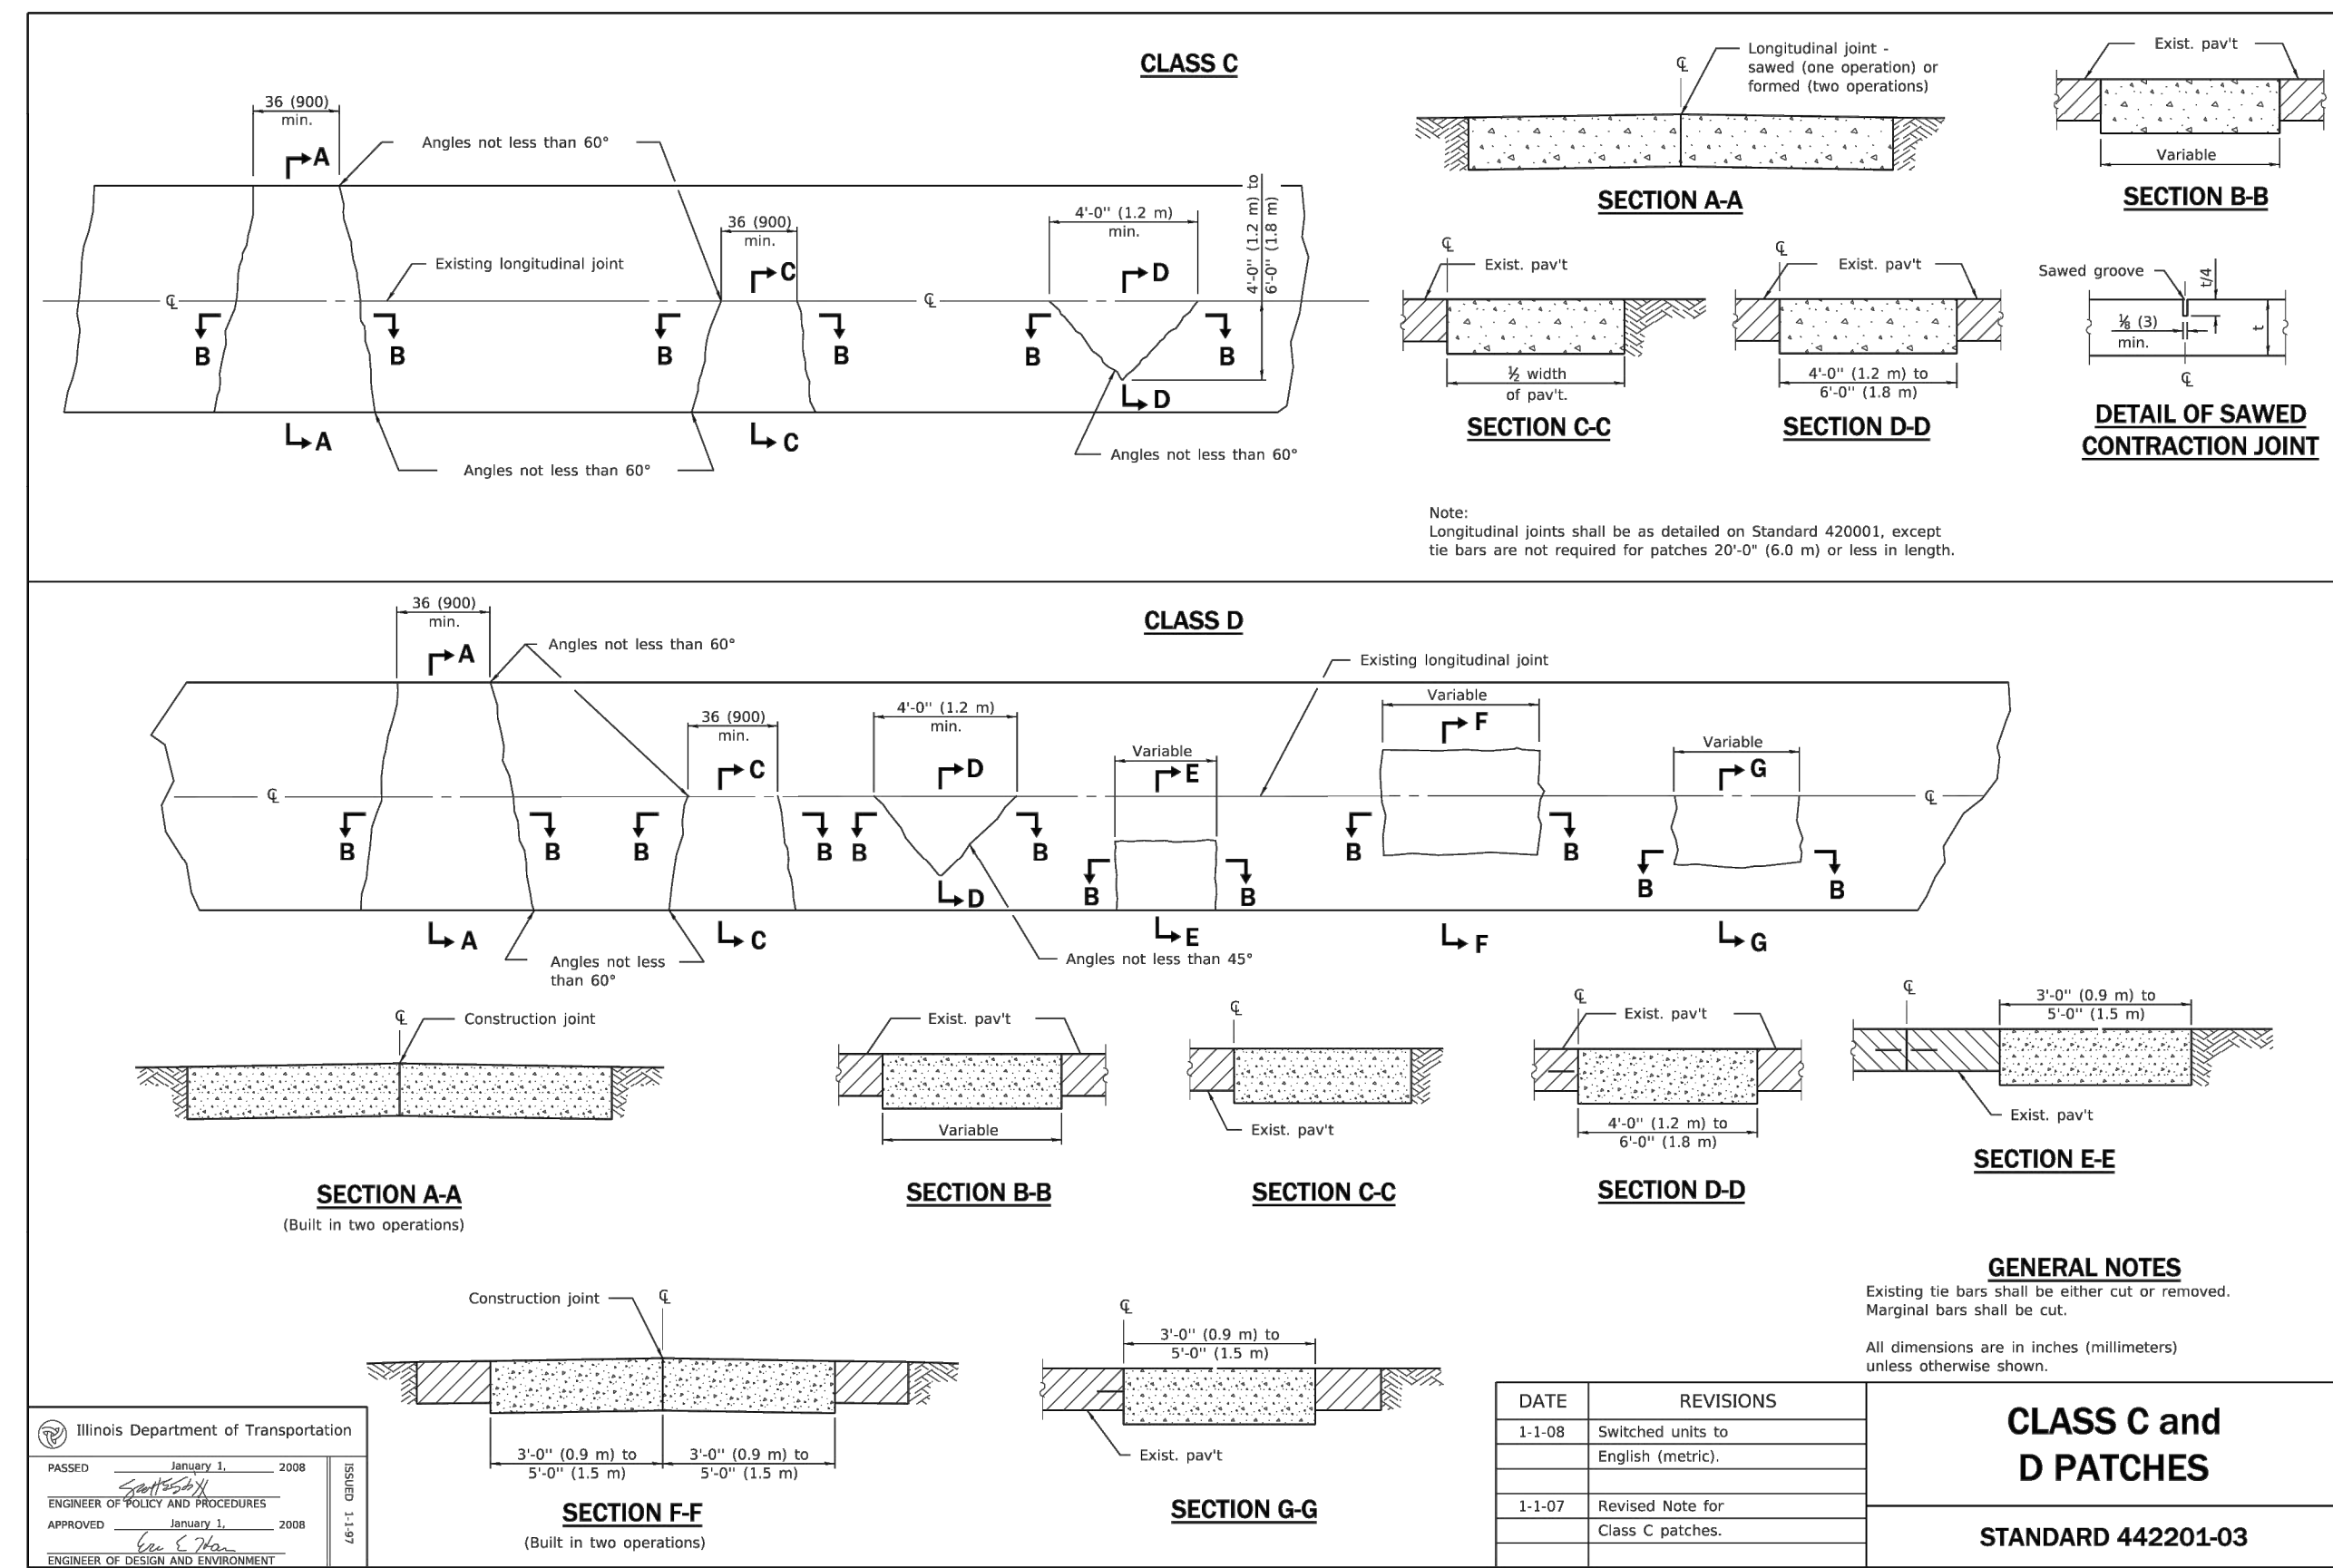

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 CLIENT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:26 PM
 FILE NAME: 191806-Details
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb






USER NAME = KJENKINS	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

IDOT STANDARD DETAILS

SCALE: N.T.S. SHEET NO. 01 OF 02 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	28
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

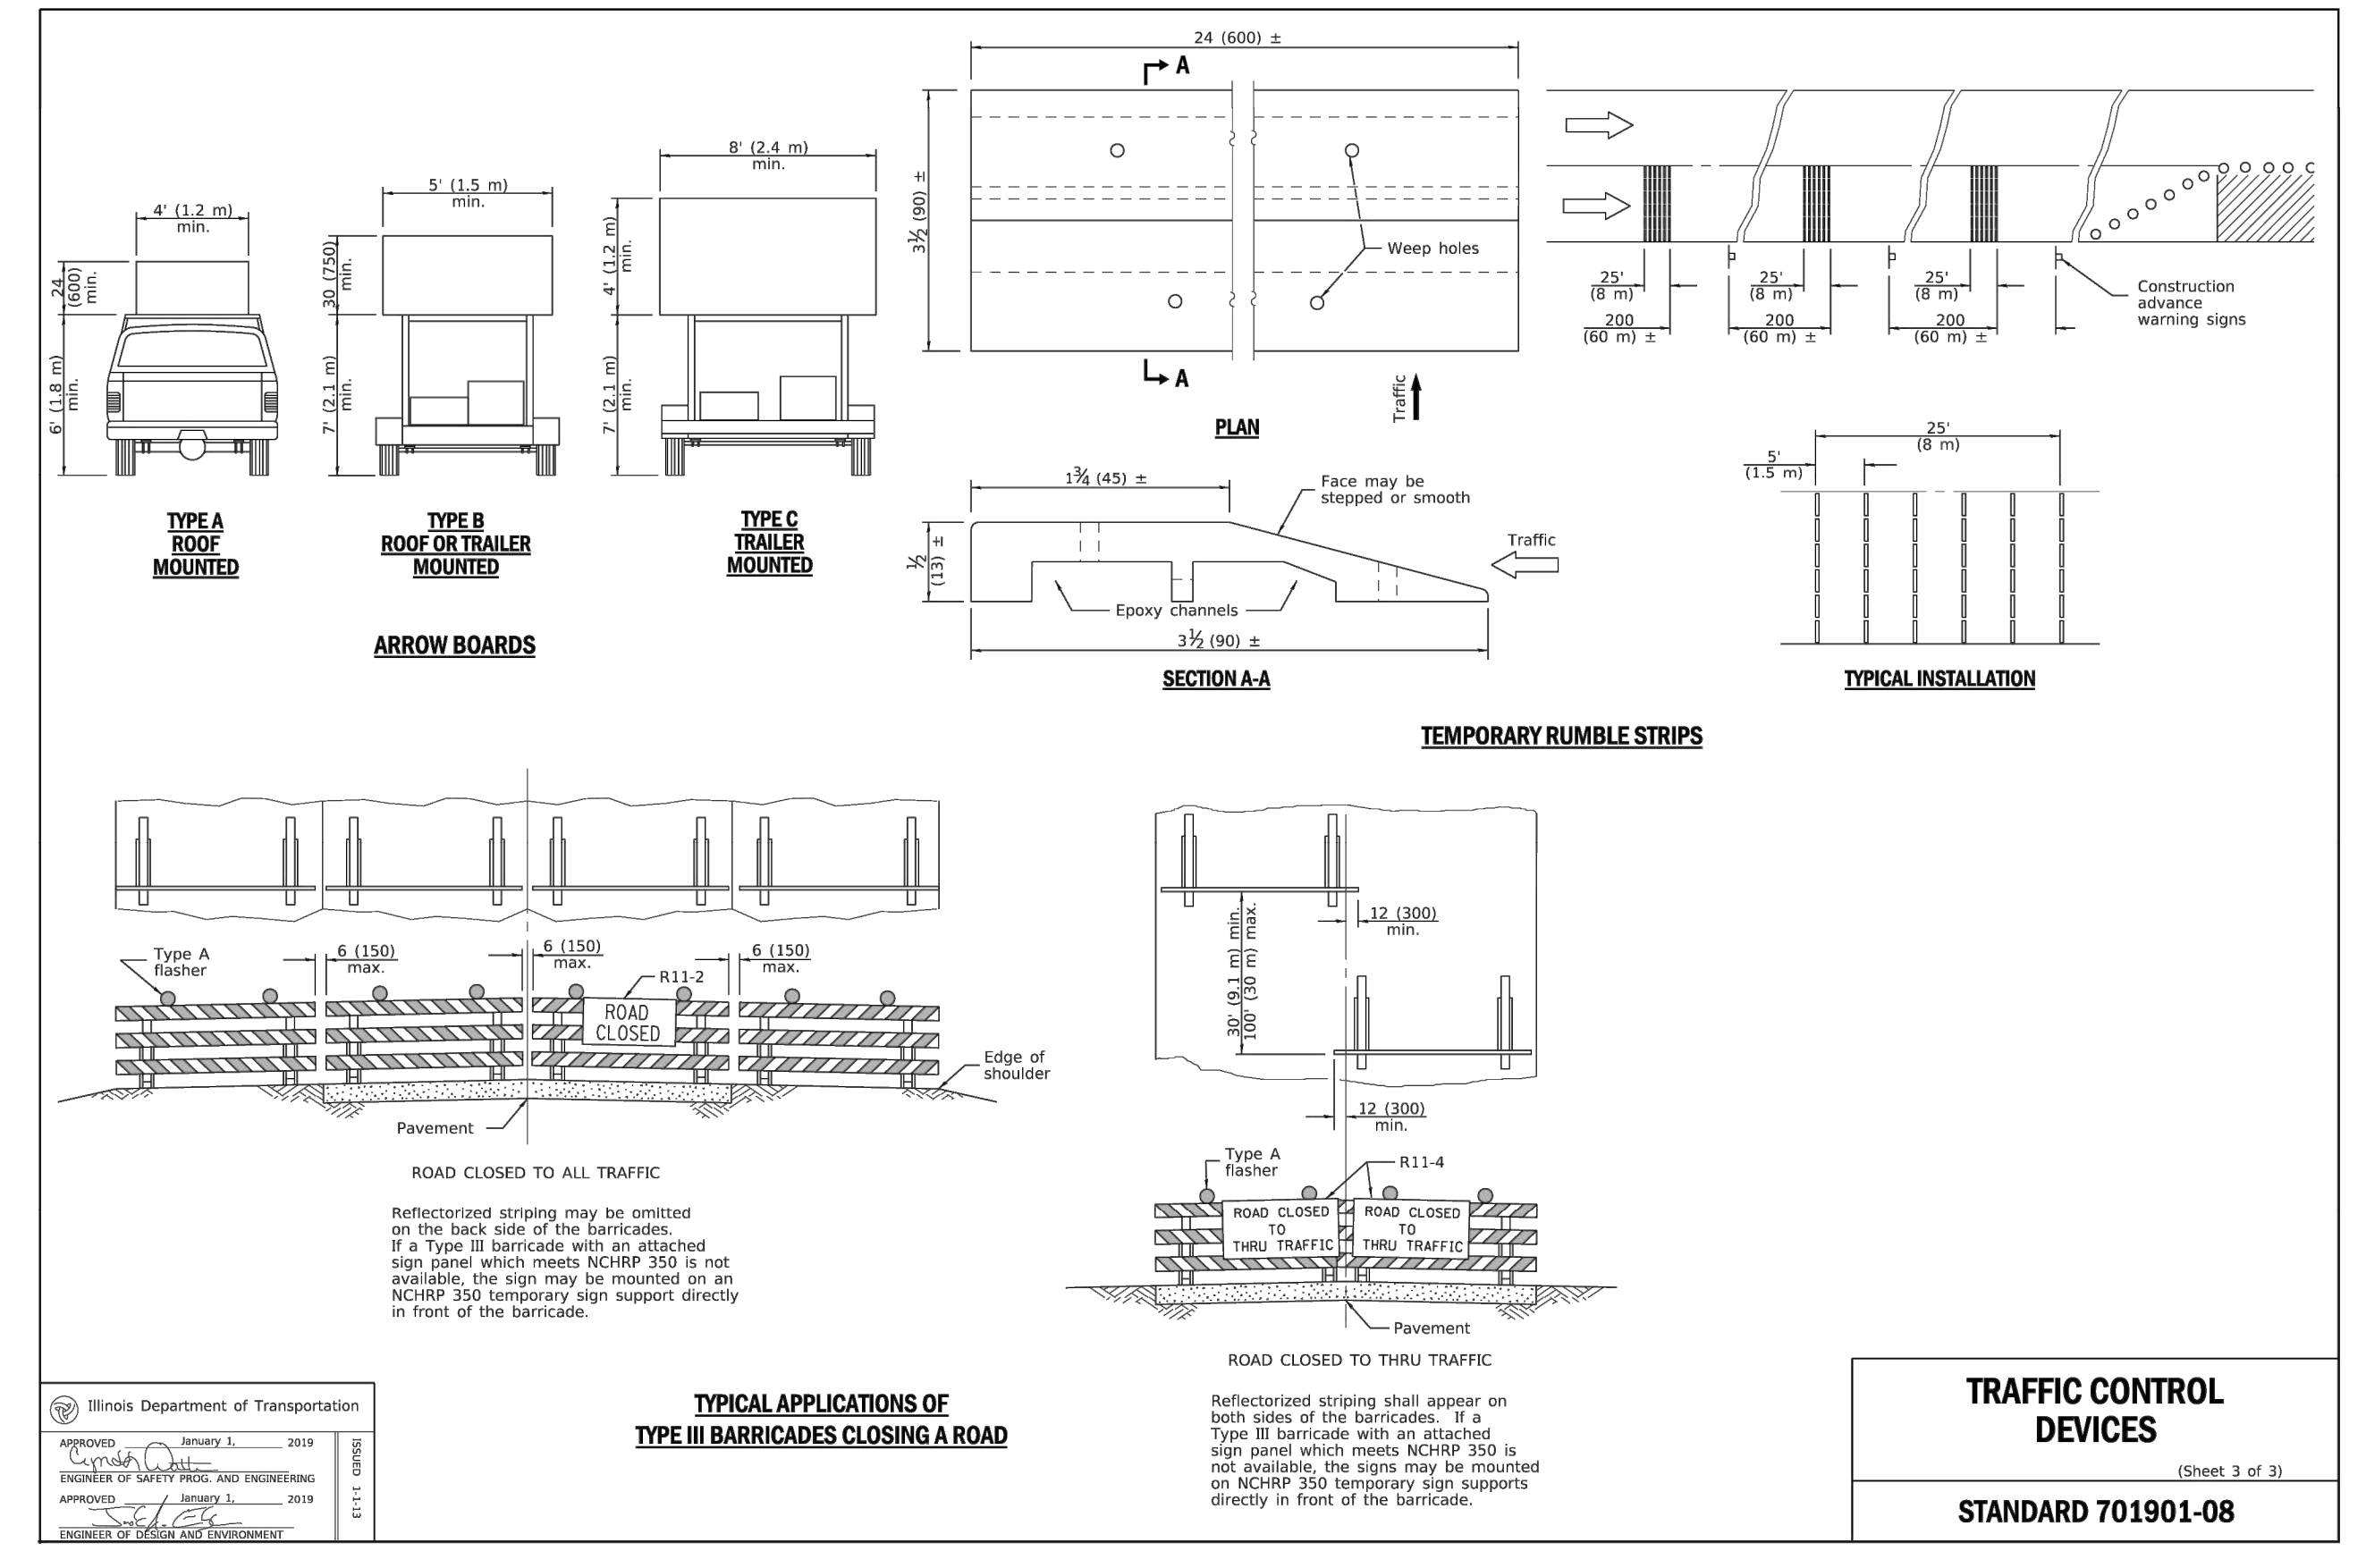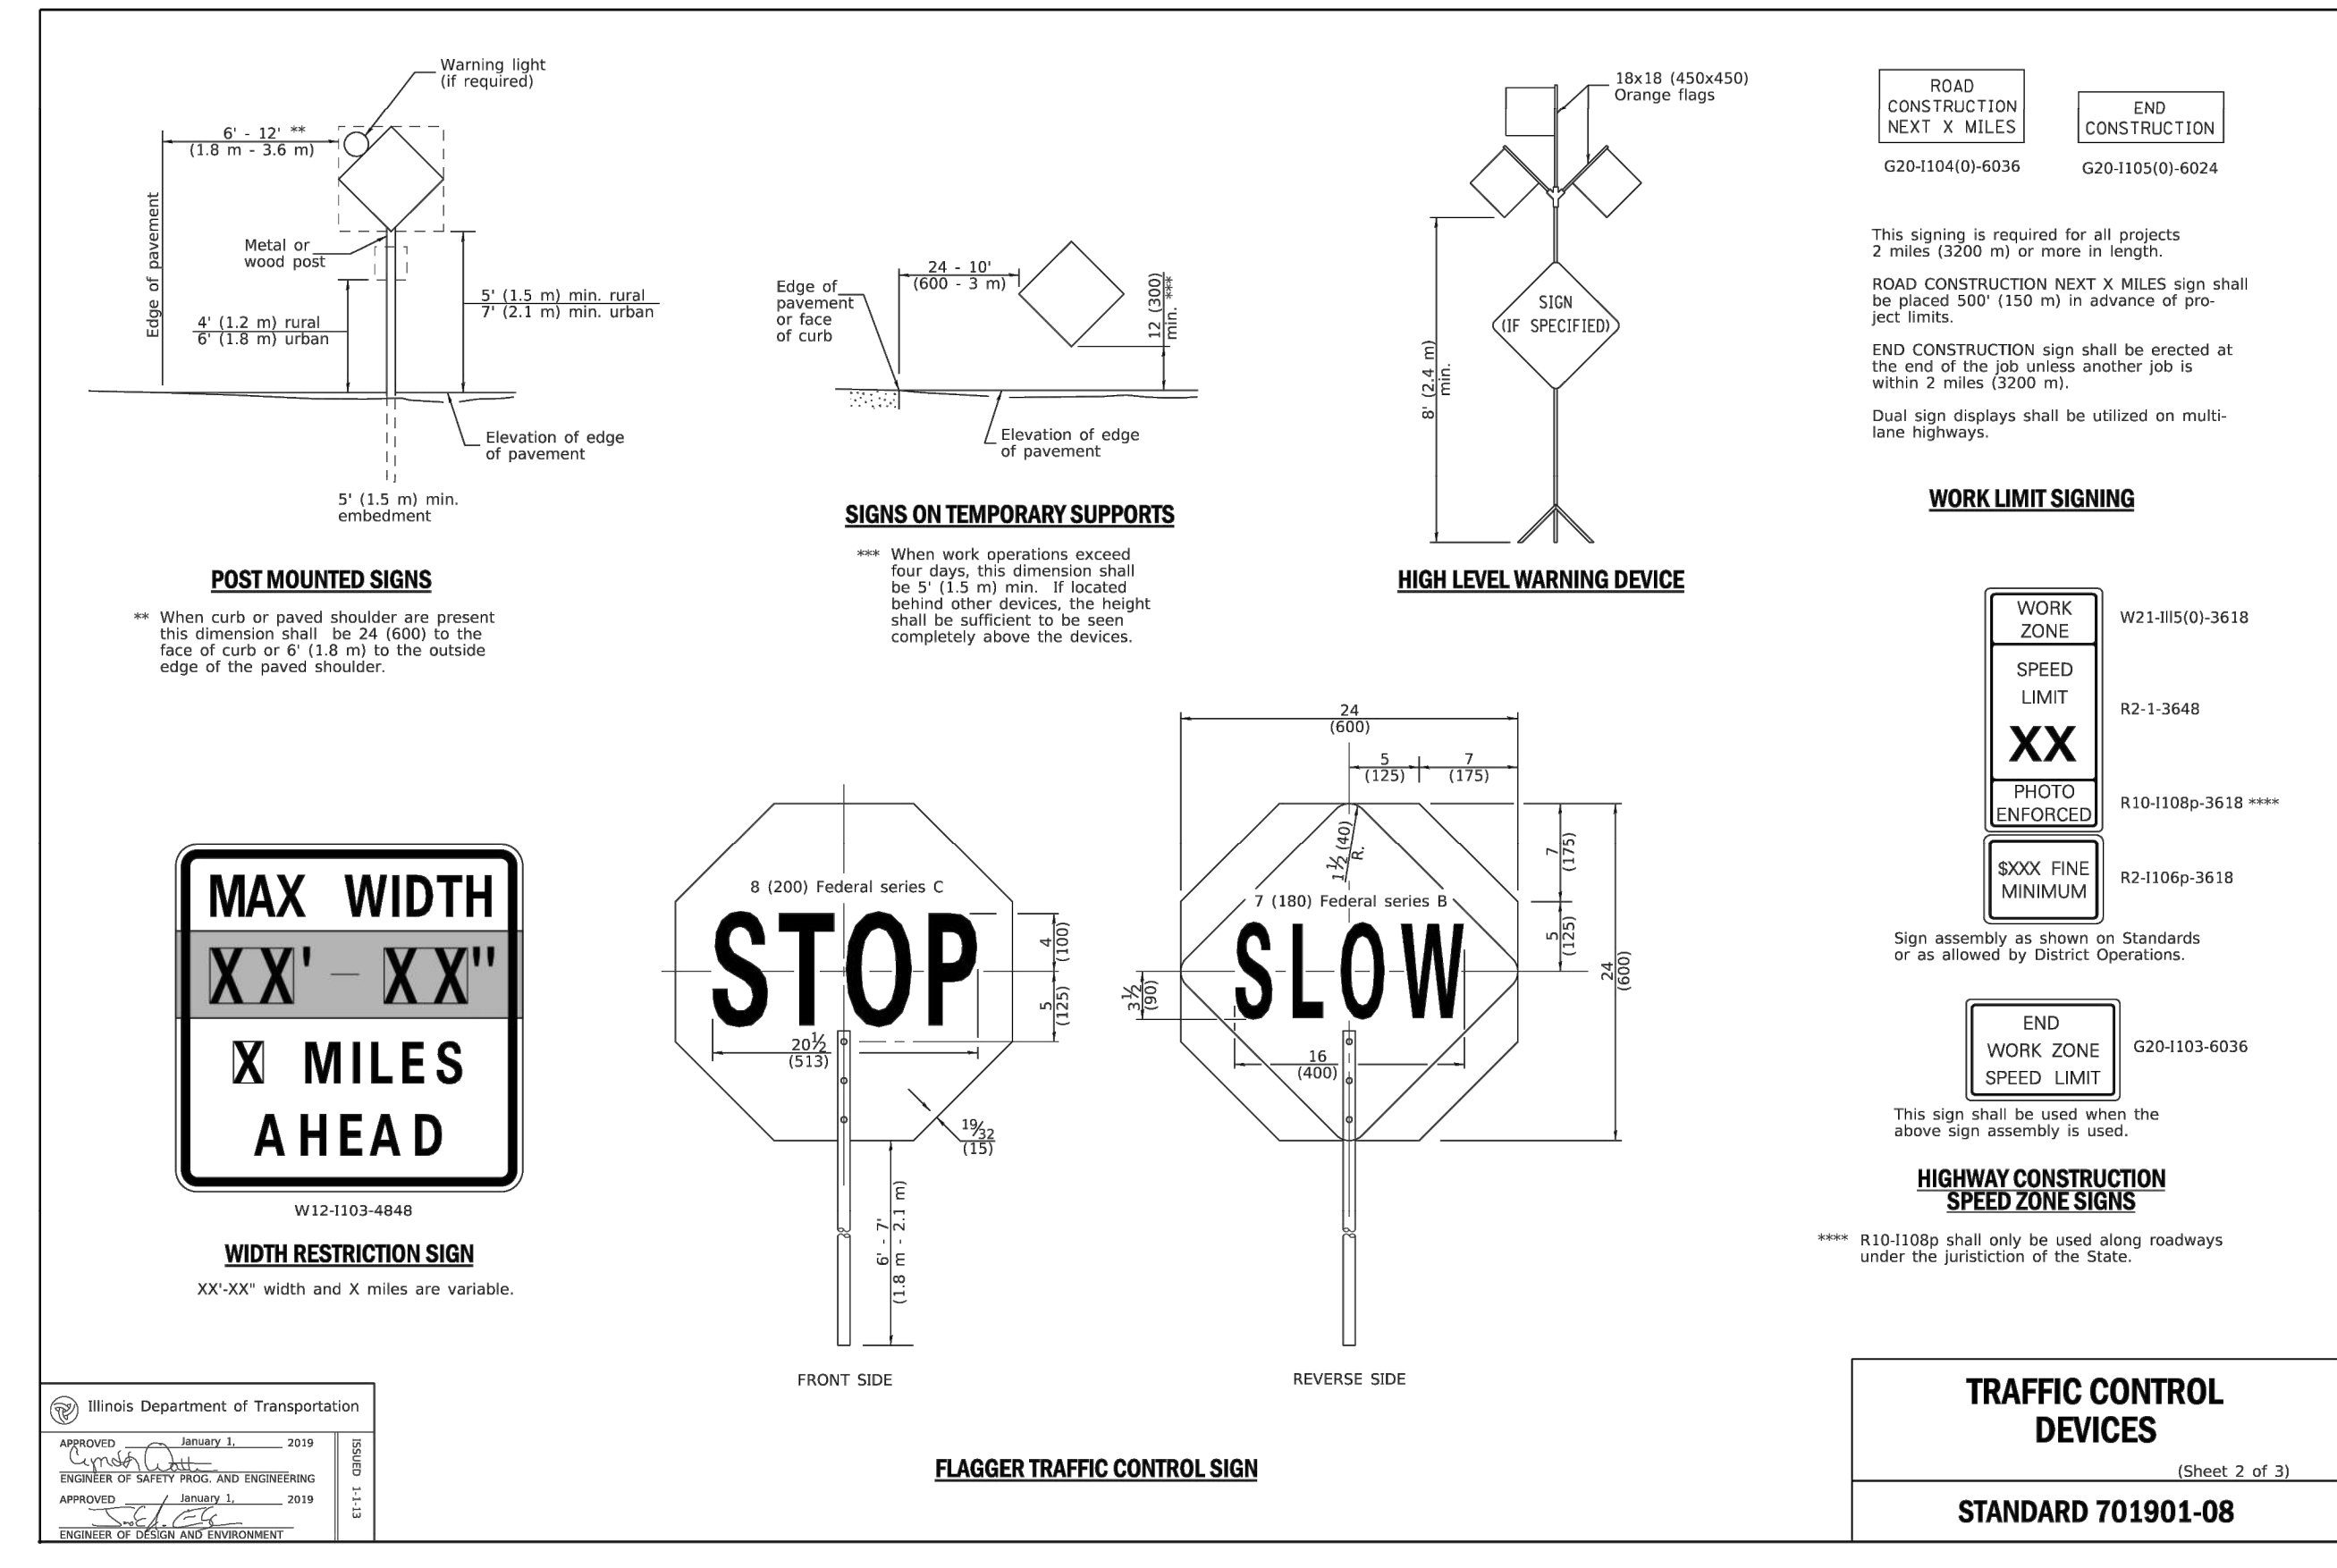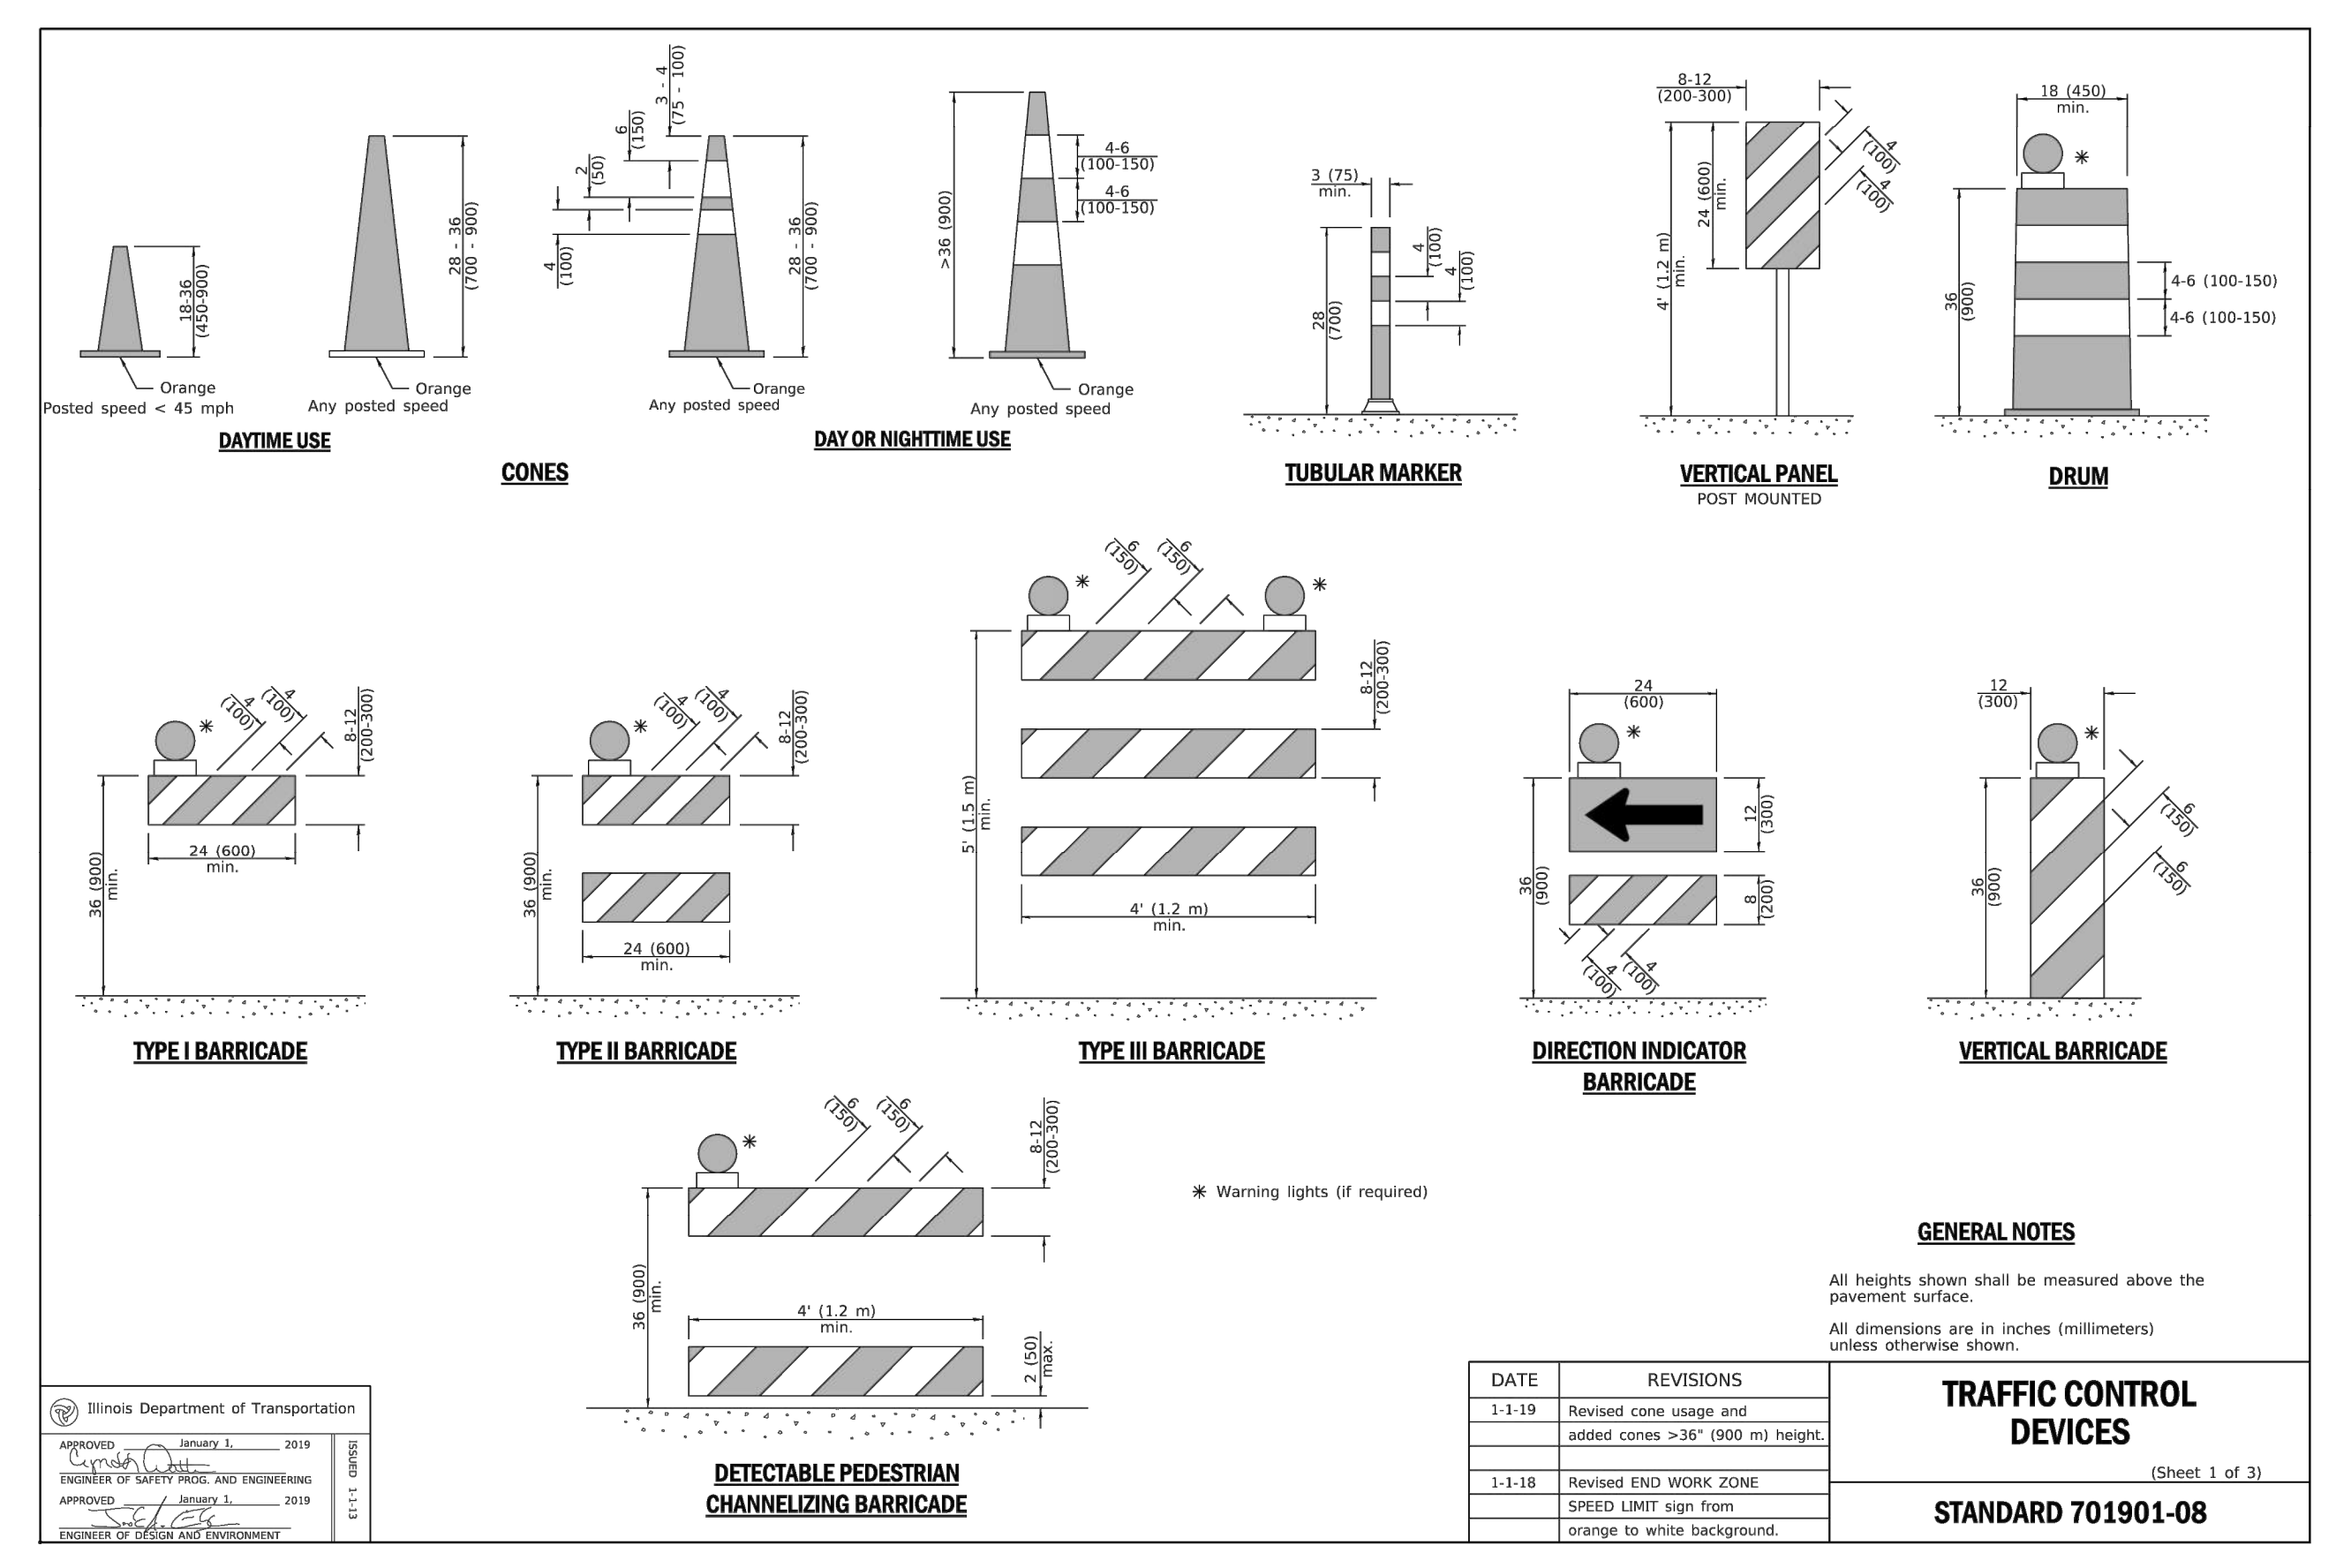

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen
 DATE PLOTTED: 2/6/2026 3:26 PM
 FILE NAME: 191806-Details
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb



USER NAME = KJENKINS	DESIGNED - LRG	REVISED -
FILE NAME = 191806-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

IDOT STANDARD DETAILS

SCALE: N.T.S. SHEET NO. 02 OF 02 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	29
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

ABBREVIATIONS

A	AMPERES
AC	ALTERNATING CURRENT
AF	AMPERE FRAME
AFB	ABOVE FINISHED FLOOR
AG	ABOVE FINISHED GRADE
AICS	AMPERES INTERRUPTING CAPACITY, SYMMETRICAL
ASD	ADJUSTABLE SPEED DRIVE
AT	AMPERE TRIP
ATS	AUTOMATIC TRANSFER SWITCH
AWG	AMERICAN WIRE GAUGE
BC	BARE COPPER
C	CONDUIT
CB	CIRCUIT BREAKER
CO	CONDUIT ONLY
CKT	CIRCUIT
CPT	CONTROL POWER TRANSFORMER
CT	CURRENT TRANSFORMER
DB	DIRECT BURIED
DC	DIRECT CURRENT
DWG	DRAWING
ELEV	ELEVATION
ENCL	ENCLOSURE
EP	EXPLOSION PROOF
ETM	ELAPSED TIME METER
EXIST	EXISTING
FLEX	FLEXIBLE
GFI	GROUND FAULT INTERRUPTER
GFR	GROUND FAULT RELAY
GND	GROUND
HH	HANDHOLE
HOA	HAND OFF AUTOMATIC
HP	HORSEPOWER
HVAC	HEATING, VENTILATING, AND AIR CONDITIONING
HZ	HERTZ
JB	JUNCTION BOX
KVA	KILOVOLT-AMPERES
KW	KILOWATT
LA	LIGHTNING ARRESTOR
LOS	LOCKOUT STOP PUSH-BUTTON
LS	LIMIT SWITCH
LTG	LIGHTING
MA	MILLIAMPERE
MAX	MAXIMUM
MCC	MOTOR CONTROL CENTER
MCM	THOUSAND CIRCULAR MILS
MIN	MINIMUM
MT	EMPTY
MTD	MOUNTED
N	NEUTRAL
NC	NORMALLY CLOSED
NL	NIGHTLIGHT
NO	NORMALLY OPEN
NO.	NUMBER
NTS	NOT TO SCALE
OL'S	MOTOR OVERLOAD CONTACTS
P	POLE
PB	PUSHBUTTON, PULLBOX
PH	PHASE
PS	PRESSURE SWITCH
PT	POTENTIAL TRANSFORMER
PVC	POLYVINYL CHLORIDE
REF	REFERENCE
REQ'D	REQUIRED
SH	SHIELDED
SHT	SHEET
STD	STANDARD
SW	SWITCH
TACH	TACHOMETER
TB	TERMINAL BOARD
TEL	TELEPHONE
TEMP	TEMPERATURE
TSP	TWISTED PAIR
XFMR	TRANSFORMER
TSP	TWISTED SHIELDED PAIR
TST	TWISTED SHIELDED TRIAD
TSTAT	THERMOSTAT
TYP	TYPICAL
UG	UNDERGROUND
UN	UNLESS OTHERWISE NOTED
V	VOLT
VFD	VARIABLE SPEED DRIVE
VS	VARIABLE SPEED
W	WATTS, WIRE
WP	WEATHERPROOF
ZS	POSITION SWITCH

ELECTRICAL SYMBOLS

	UTILITY METERING
	METERING DEVICE: AM-AMMETER VM-VOLTMETER WM-WATTMETER FM-FREQUENCY METER WHM-KILOWATT HOUR METER DM-DIGITAL MULTI-FUNCTION METER MFM-MULTI-FUNCTION METER
	AMMETER SWITCH
	VOLTMETER SWITCH
	CURRENT TRANSFORMER, QUANTITY INDICATED
	POTENTIAL TRANSFORMER, QUANTITY INDICATED
	SWITCHGEAR DEVICE: 11 MULTIFUNCTION RELAY 21 DISTANCE RELAY 25 SYNCHRONIZING OR SYNCHRONISM CHECK DEVICE 26Q TEMPERATURE RELAY 27 UNDERVOLTAGE RELAY 32 DIRECTIONAL POWER RELAY 43 MANUAL TRANSFER OR SELECTOR DEVICE 44 REVERSE-PHASE OR PHASE-BALANCE CURRENT RELAY 47 PHASE-SEQUENCE VOLTAGE RELAY 49 MACHINE OR TRANSFORMER THERMAL RELAY 50 INSTANTANEOUS OVERCURRENT OR RATE OF RISE RELAY 50G ZERO SEQUENCE GROUND FAULT RELAY 51 A-C TIME OVERCURRENT RELAY 52 A-C CIRCUIT BREAKER 59 OVERVOLTAGE RELAY 63 SUDDEN PRESSURE RELAY 65 GOVERNOR 67 A-C DIRECTIONAL OVERCURRENT RELAY 81 FREQUENCY RELAY 86 LOCKOUT RELAY 87 DIFFERENTIAL PROTECTIVE RELAY
	KEY INTERLOCKING OF EQUIPMENT
	MECHANICAL INTERLOCKING OF EQUIPMENT
	ELECTRICAL INTERLOCKING OF EQUIPMENT
	POWER FACTOR CORRECTING CAPACITOR
	PHASE MONITORING RELAY
	ELAPSED TIME METER
	SURGE PROTECTIVE DEVICE
	MULTI-FUNCTION METER
	REMOTE TERMINAL UNIT
	TERMINAL BLOCK
	TRIP COIL
	GENERATOR NEUTRAL JUNCTION
	NEUTRAL GROUNDING RESISTOR (NGR)
	SHORTING TERMINAL BLOCK
	SYNCH SWITCH
	MEDIUM VOLTAGE SURGE ARRESTER
	LOW VOLTAGE CIRCUIT BREAKER (CB), RATINGS AND NO. OF POLES AS SHOWN. WHEN SPECIFIC TYPE IS REQUIRED, X INDICATES TYPE. TYPES: MCCB - MOLDED CASE ICCB - INSULATED CASE LVP - LOW VOLTAGE POWER MCP - MOTOR CIRCUIT PROTECTOR (RATING PER CONNECTED LOAD)
	SEPARATELY MOUNTED CIRCUIT BREAKER, SEE ELECTRICAL ONE LINE DIAGRAM OR SCHEDULE FOR DESCRIPTION
	GROUND FAULT PROTECTION

ELECTRICAL SYMBOLS

	MEDIUM VOLTAGE CIRCUIT BREAKER
	FUSE, SIZE AND NUMBER OF FUSES AS NOTED
	FUSED CUTOFF, CURRENT RATING, FUSE SIZE AND NUMBER OF POLES AS NOTED
	FUSIBLE SWITCH, CURRENT RATING, FUSE SIZE AND QUANTITY AS NOTED
	NON-FUSED SWITCH, CURRENT RATING AND NUMBER OF POLES AS NOTED
	DISCONNECT OR DRAWOUT CONNECTION
	MOTOR CONTROLLER TYPE/SIZE FEATURES
	THERMAL OVERLOAD ELEMENT
	THERMAL OVERLOAD RELAY CONTACT
	MOTOR WITH DESIGN HORSEPOWER (WHEN INDICATED)
	GENERATOR
	TRANSFER SWITCH, CURRENT RATING AND NUMBER OF POLES AS NOTED.
	ATS - AUTOMATIC MTS - MANUAL
	TRANSFORMER Δ 3 PHASE, 3 WIRE DELTA CONNECTION Y 3 PHASE, 4 WIRE GROUND WYE CONNECTION
	SWITCHBOARD OR PANELBOARD, NAME, VOLTAGE, PHASE, NUMBER OF WIRES WHEN INDICATED.
	DELTA CONNECTION
	WYE CONNECTION
	GROUND WYE CONNECTION
	MANUAL MOTOR STARTER
	MOTOR OVERLOAD HEATER CONTACTS
	MOTOR OVERLOAD HEATER
	SOLENOID OPERATED VALVE
	MOTOR
	ALARM
	FUSE
	CONTROL POWER TRANSFORMER
	GROUND
	WIRING IN MOTOR STARTER
	FIELD WIRING

ELECTRICAL SYMBOLS PLANS

	LIGHT FIXTURES ○ CEILING/PENDANT MOUNTED FIXTURE ● CEILING/PENDANT MOUNTED FIXTURE, EMERGENCY/NIGHT LIGHT ○ WALL MOUNTED FIXTURE ○ CEILING/PENDANT MOUNTED FIXTURE ○ WALL MOUNTED FIXTURE ○ CEILING/PENDANT MOUNTED FIXTURE, EMERGENCY/NIGHT LIGHT ○ WALL MOUNTED FIXTURE, EMERGENCY/NIGHT LIGHT ⊕ EXIT LIGHT, CEILING MOUNTED, ARROW DIRECTION AS INDICATED. SHADED SECTION INDICATES ILLUMINATION FACE. ⊕ EXIT LIGHT, WALL MOUNTED, ARROW DIRECTION AS INDICATED. SHADED SECTION INDICATES ILLUMINATION FACE. ⊕ EMERGENCY LIGHT FIXTURE, 2 ATTACHED HEADS AS SHOWN ⊕ EMERGENCY LIGHT, REMOTE MOUNTED HEAD
	FIRE ALARM SYSTEM F MANUAL PULL STATION, 48" ABOVE FLOOR V VISUAL ALARM LIGHT 80" ABOVE FLOOR OR AS NOTED A AUDIBLE ALARM DEVICE WITH VISUAL ALARM LIGHT 80" ABOVE FLOOR OR AS NOTED C COMBINATION AUDIBLE ALARM DEVICE AND VISUAL ALARM LIGHT 80" ABOVE FLOOR, AND MANUAL PULL STATION 48" ABOVE FLOOR G GENERAL ALARM BELL 80" ABOVE FLOOR OR AS NOTED V VISUAL ALARM LIGHT 80" ABOVE FLOOR, AND MANUAL PULL STATION 48" ABOVE FLOOR. F THERMAL FIRE DETECTOR, COMBINATION RATE OF RISE AND FIXED TEMPERATURE. '200' INDICATES 200 DEGREE FIXED TEMPERATURE. '135' INDICATES 135 DEGREE FIXED TEMPERATURE. 'ST' INDICATES DETECTOR TO INITIATE ELEVATOR C.B. SHUNT-TRIP. A AUTOMATIC DOOR RELEASE CONNECTION S SMOKE DAMPER CONNECTION S SMOKE DETECTOR ON CEILING; D'-INDICATES DUCT DETECTOR TYPE R'-INDICATES RELAY FOR AUXILIARY CONTROLS ER' INDICATES DETECTOR TO INITIATE ELEVATOR RECALL PT' INDICATES PROJECTED BEAM TYPE TRANSMITTER PR' INDICATES PROJECTED BEAM TYPE RECEIVER F FAN SHUT-DOWN CONNECTION R REMOTE DETECTOR INDICATOR LIGHT R DUCT SMOKE DETECTOR REMOTE TEST/RESET STATION FS SPRINKLER FLOW SWITCH CONNECTION TS TAMPER-PROOF SPRINKLER VALVE SWITCH CONNECTION FAZ FIRE ALARM ZONE ANNUNCIATOR FAM FIRE ALARM MASTER ANNUNCIATOR FACP FIRE ALARM CONTROL PANEL C TELEPHONE STATION G GAS DETECTOR SENSOR FIRE ALARM ZONE
	SITE ⊕ LIGHTING CONTROL STATION, PAD MOUNTED ⊕ LIGHTING CONTROL STATION, POLE MOUNTED ⊕ HAND HOLE J JUNCTION BOX T UTILITY TRANSFORMER, PAD MOUNTED T UTILITY TRANSFORMER, POLE MOUNTED PC PHOTOCELL MH MAN HOLE UNDERGROUND CONDUIT ○ POLE MOUNTED LIGHTING UNIT, AS SPECIFIED ○ BACK MOUNTED LIGHTING UNIT, AS SPECIFIED ⊕ TOWER LIGHTING UNIT, AS SPECIFIED ⊕ ATHLETIC FIELD LIGHTING UNIT, AS SPECIFIED

	CONDUIT, RACEWAY AND WIRING ○ CONDUIT TURNING UP ○ CONDUIT TURNING DOWN ○ HOME RUN TO PANEL, 2 #12, 1 #12G IN 3/4" UNLESS OTHERWISE NOTED ○ CIRCUIT RUN BETWEEN DEVICES EXPOSED IN NON-ARCHITECTURALLY FINISHED AREAS, CONCEALED IN ARCHITECTURALLY FINISHED AREAS. CONDUIT AND CONDUCTOR SIZES SHALL BE THE SAME AS THE HOMERUN FOR THE CIRCUIT ○ CONDUIT RUN BETWEEN DEVICES CONCEALED IN NON-ARCHITECTURALLY FINISHED AREAS OR UNDER FLOOR SLAB. CONDUIT AND CONDUCTOR SIZES SHALL BE THE SAME AS THE HOMERUN FOR THE CIRCUIT. ○ CIRCUIT CONTINUATION ○ CONDUIT STUBBED OUT AND CAPPED ### CONDUIT TAG OR CIRCUIT NUMBER - WIRE AND CONDUIT SIZE AS SPECIFIED IN CIRCUIT SCHEDULE ON THE SHEETS ○ PLUG IN STRIP-TYPE RECEPTACLES OR OTHER OUTLETS AS INDICATED ○ LAY IN WIREWAY DUCT, SIZE AS NOTED ○ FEEDER DUCT-RATING AND NUMBER OF CONDUCTORS AS NOTED ○ PLUG IN DUCT-RATING AND NUMBER OF CONDUCTORS AS NOTED ○ CABLE TRAY, TYPE AS NOTED
	CONDUIT TAGS A. GRS: GALVANIZED RIGID STEEL B. RAC: RIGID ALUMINUM CONDUIT C. PVC-GRS: PVC COATED GALVANIZED RIGID STEEL CONDUIT D. PVC: RIGID POLYVINYL CHLORIDE CONDUIT E. EMT: ELECTRICAL METALLIC TUBING CONDUIT (THINWALL) F. LFMC: LIQUIDTIGHT FLEXIBLE METAL CONDUIT G. HDPE: HIGH DENSITY POLYETHYLENE CONDUIT H. FMC: FLEXIBLE METAL CONDUIT
	COMMUNICATIONS SYSTEM S SPEAKER OUTLET RECESSED IN CEILING (UNLESS NOTED OTHERWISE), 'S'-INDICATES SURFACE TYPE, 'C'-INDICATES SPEAKER CONCEALED ABOVE CEILING, 'P'-INDICATES PROJ. HORN TYPE, 'DF'-INDICATES DOUBLE FACE TYPE ○ TELEPHONE OUTLET, IN WALL 16" ABOVE FLOOR OR AS NOTED. 'W' INDICATES WALL MOUNTED TELEPHONE AT 54" ○ COMPUTER TERMINAL OUTLET-IN WALL OR AS NOTED ○ COMBINATION TELEPHONE & COMPUTER TERMINAL OUTLET IN WALL 16" ABOVE FLOOR OR AS NOTED ○ TELEPHONE OUTLET, IN FLOOR BOX V VOLUME CONTROL, NUMERAL DESIGNATES ASSOCIATED SPEAKERS
	GROUNDING ○ GROUND GRID CONDUCTOR (SIZE PER DWG.) ○ GROUND ROD ○ GROUND SYSTEM TEST WELL ○ EXOTHERMIC WELDED GROUND CONNECTION ○ EQUIPMENT GROUND CABLE STUB-UP MGB MAIN GROUND BAR

	WIRING DEVICE ○ CLOCK HANGER RECEPTACLE-20A, 125V, 2P, 3W (NEMA 5-20R), IN WALL +84" OR AS NOTED ○ SIMPLEX RECEPTACLE - 125V, 2P, 3W 20A, 30A, OR 50A AT OUTLET INDICATES AMP. RATING (NEMA 5-20R, 5-30R, OR 5-50R), IN WALL OR AS NOTED ○ DUPLEX RECEPTACLE-20A, 125V, 2P, 3W (NEMA 5-20R), IN WALL ○ DUPLEX RECEPTACLE-20A, 125V, 2P, 3W (NEMA 5-20R) IN CEILING ○ DUPLEX RECEPTACLE-20R, 125V, 2P, 3W (NEMA 5-20R), IN WALL ABOVE COUNTER TOP OR BACK SPLASH 'GFI'-INDICATES GROUND FAULT INTERRUPTER TYPE 'SS'-INDICATES SURGE SUPPRESSOR TYPE 'IG'-INDICATES ISOLATED GROUND TYPE ○ DUPLEX RECEPTACLE-20R, 125V, 2P, 3W (NEMA 5-20R), IN WALL OR AS NOTED, ONE RECEPTACLE HOT, ON RECEPTACLE SWITCH ○ FLOOR OUTLET BOX WITH SIMPLEX RECEPTACLE-20A, 125V, 2P, 3W (NEMA 5-20R) ○ FLOOR OUTLET WITH DUPLEX RECEPTACLE ○ OUTLET WITH SPECIAL DEVICE AS NOTED, IN WALL ○ OUTLET WITH SPECIAL DEVICE AS NOTED, IN FLOOR ○ OUTLET WITH SPECIAL DEVICE AS NOTED, IN CEILING J JUNCTION BOX OR OUTLET BOX ○ SINGLE POLE WALL SWITCH: # - INDICATES 2-WAY, 3-WAY OR 4-WAY PL - PILOT LIGHT L/T - LOCKING TYPE LV - LOW VOLTAGE TYPE T - TIMER MC - MOMENTARY CONTACT P PULL BOX ○ PUSHBUTTON, AS NOTED ○ LOCAL LIGHT DIMMER, M INDICATES MASTER CONTROLLER 1000 INDICATES 1000 WATTS 1500 INDICATES 1500 WATTS 2000 INDICATES 2000 WATTS MOTOR SPEED CONTROLLER 2-SPEED, 3-SPEED OR VARIABLE SPEED AS INDICATED DH MAGNETIC DOOR HOLD
	EQUIPMENT ○ MOTOR CONNECTION E EQUIPMENT TERMINAL POINT ○ SAFETY DISCONNECT SWITCH, NON-FUSED UNLESS NOTED (F) M MOTOR RATED SWITCH, NO. OF POLES AS REQUIRED. FS FUSE HOLDER WITH FUSESTAT AND TOGGLE SWITCH ○ MOTOR STARTER-MAGNETIC UNLESS NOTED MAN. (MANUAL) ○ COMBINATION MOTOR STARTER AND FUSED DISCONNECT SWITCH-MAGNETIC STARTER ○ COMBINATION MOTOR STARTER AND NON-FUSED DISCONNECT SWITCH-MAGNETIC STARTER ○ BRANCH CIRCUIT PANELBOARD SURFACE MOUNTED ○ BRANCH CIRCUIT PANELBOARD FLUSH MOUNTED ○ SPECIAL CABINET OR EQUIPMENT AS NOTED SURFACE MOUNTED ○ SPECIAL CABINET OR EQUIPMENT AS NOTED FLUSH MOUNTED T15 DRY-TYPE TRANSFORMER, NUMBER INDICATES KVA SIZE ○ POWER DISTRIBUTION PANELBOARD SURFACE MOUNTED OR FREESTANDING, AS NOTED ○ POWER DISTRIBUTION PANELBOARD, ELECTRICAL EQUIPMENT MCC OR SWITCHBOARD, FLUSH MOUNTED ATS AUTOMATIC TRANSFER SWITCH MTS MANUAL TRANSFER SWITCH CS CONTROL STATION LC LIGHTING CONTACTOR

	SECURITY SYSTEM K KEYPAD STATION K KEYPAD ACCESS CONTROL C CARD ACCESS READER C K COMBINATION KEYPAD ACCESS CONTROL & CARD ACCESS READER G GLASS BREAK SENSOR D SECURE DOOR, ELECTRICAL STRIKE & CONTACTS AS SCHEDULED W SECURE WINDOW M SECURITY MOTION SENSOR, AS INDICATED P SECURITY ACCESS PROXIMITY SENSOR ○ CLOSED CIRCUIT TELEVISION CAMERA FIXED MOUNTED ○ CLOSED CIRCUIT TELEVISION CAMERA REMOTE PAN, TILT, & CONTROL DC DOOR CABINET SEC SECURITY EQUIPMENT CONTROL PANEL
--	--

	VENTILATION ALARM SYSTEM H HORN S STROBE ○ PUSHBUTTON ENCLOSURE W/ PILOT LIGHTS
--	--

	MISCELLANEOUS T THERMOSTAT 48" ABOVE FLOOR. PC PHOTOCCELL CONTROL HD ELECTRIC HAND DRYER AS NOTED. E1 REFERENCED NOTE TS TIME SWITCH TMGB TELECOMMUNICATIONS MAIN GROUND BAR AT 80" OR AS NOTED. TGBXX TELECOMMUNICATIONS GROUND BAR. 'XX' INDICATES GROUND BAR NUMBER. S OCCUPANCY SENSOR, CEILING MOUNTED S OCCUPANCY SENSOR, WALL MOUNTED, 48" ABOVE FLOOR EM SPECIAL SYSTEM WIRING TO CENTRAL EQUIPMENT, PANEL, TERMINAL CABINET OR NEXT DEVICE. EM = EMERGENCY SYSTEM FO = FIBER OPTIC MVE = MEDIUM VOLTAGE ELECTRICAL E = ELECTRIC AS NOTED GF = CIRCUIT TO GROUND FAULT CIRCUIT BREAKER EIL = EQUIPMENT INTERLOCK MT = EMPTY CONDUIT
--	--

	NOTES 1. ALL WALL RECEPTACLES, TELEPHONE OUTLETS OR SIMILAR OUTLETS TO BE 16" ABOVE FLOOR TO BOTTOM UNLESS OTHERWISE INDICATED. 2. ALL WALL SWITCHES, PUSHBUTTONS AND DIMMERS TO BE 48" ABOVE FLOOR TO BOTTOM UNLESS OTHERWISE INDICATED. 3. UPPER CASE LETTERS 'XX' AT DEVICE INDICATES AS NOTED; DD = DOUBLE DUPLEX RECEPTACLES IN TWO GANG BOX IG = ISOLATED GROUND TYPE SS = SURGE SUPPRESSION TYPE GFI = GROUND FAULT INTERRUPTER TYPE WP = WEATHERPROOF XP = EXPLOSION PROOF TL = TWIST LOCK TYPE WG = WIREGUARD TO BE PROVIDED RI = ROUGH-IN ONLY 4. LOWER CASE LETTERS AT SWITCHES AND FIXTURES INDICATE ASSOCIATED UNITS FOR SWITCHING. 5. UPPER CASE LETTERS AT FIXTURE INDICATE FIXTURE TYPE. 6. NUMBER AT FIXTURE OR OUTLET INDICATES PANEL CIRCUIT NUMBER. 7. PLUS (+) SIGN WITH DIMENSION AT OUTLET INDICATES HEIGHT ABOVE FINISHED FLOOR, LINE OR HEIGHT ABOVE FINISHED GRADE.
--	---

NOTE:
NOT ALL SYMBOLS SHOWN IN THESE LISTS MAY BE USED IN THIS PROJECT. CONTACT ARCHITECT OR ENGINEER FOR CLARIFICATION OF ANY DISCREPANCIES.

COMPANY NAME: HRGreen.com
PROJECT CONTACT: HRGreen
DATE PLOTTED: 2/6/2026 3:26 PM
FILE NAME: 191806-Electrical-Sym&Abbrev
PLOT DRIVER: None
PEN TABLE:

HRGreen.com
Illinois Professional Design Firm
#184.001322


USER NAME = YAAD,RAHMAN	DESIGNED - KSS	REVISED -
FILE NAME = 191806-Electrical-Sym&Abbrev	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 05/24/2024	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT



Electrical Symbols & Abbreviations

SCALE: N.T.S. SHEET NO. 01 OF 04 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	30
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

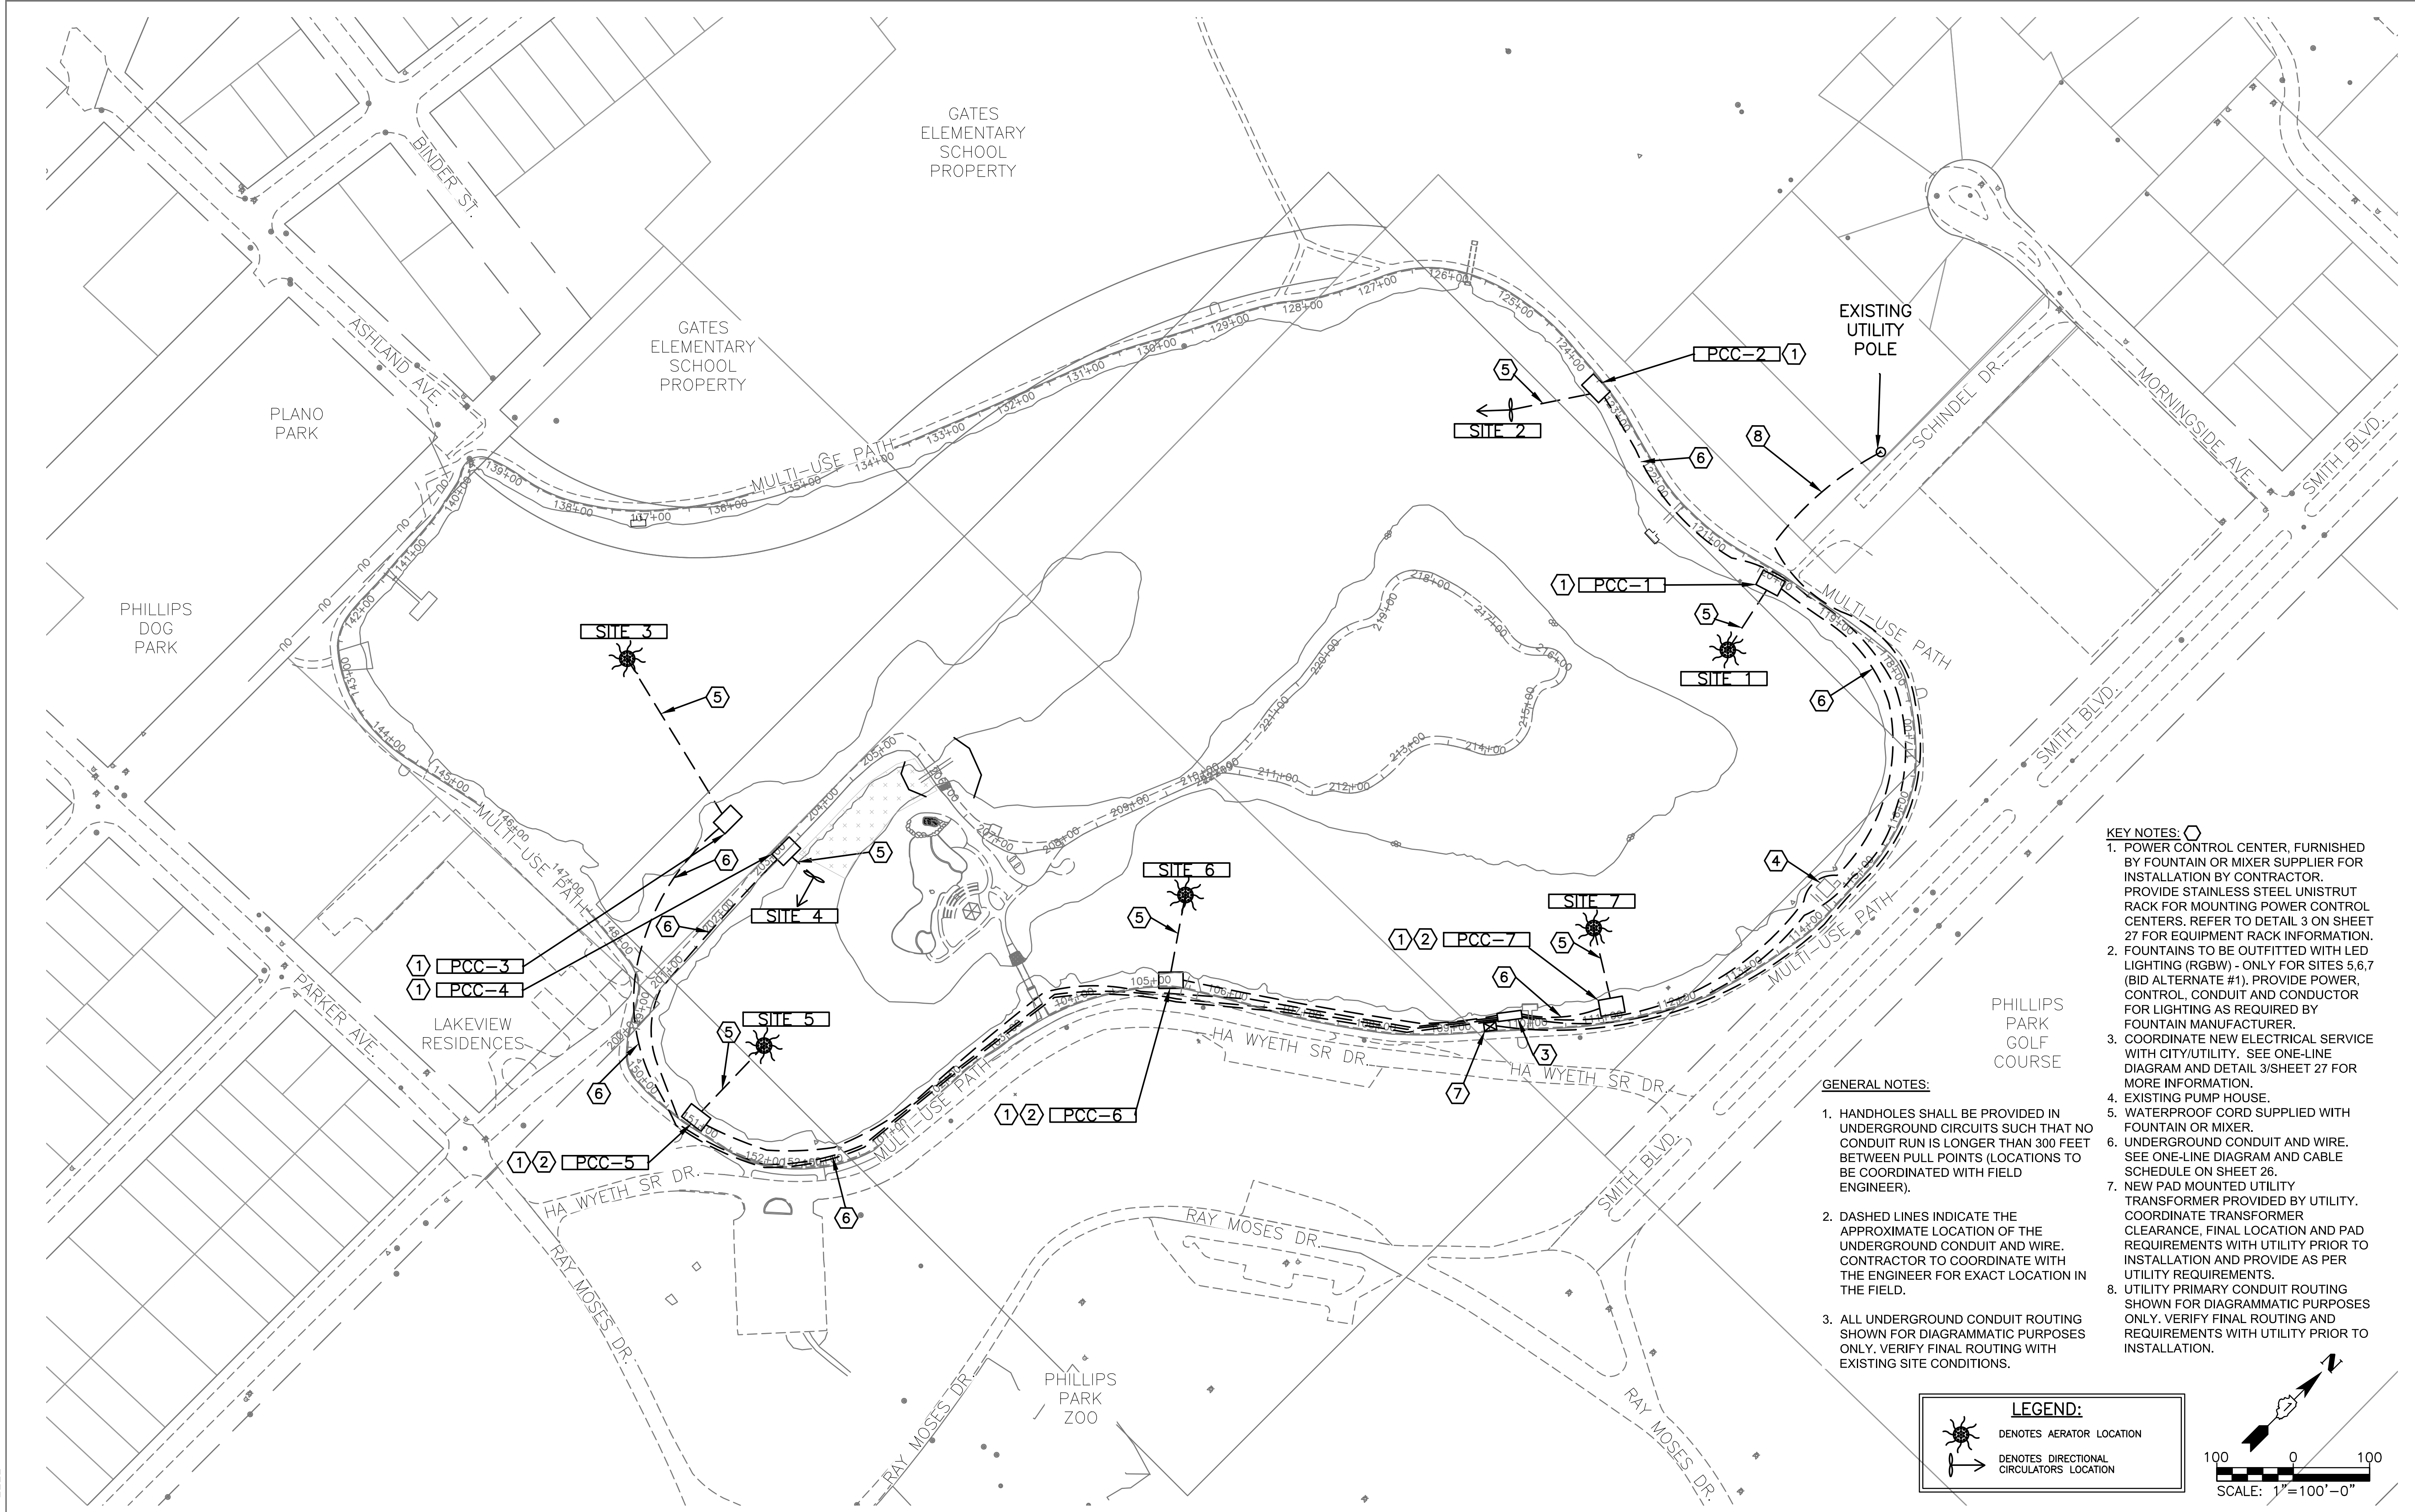

- KEY NOTES:**
- POWER CONTROL CENTER, FURNISHED BY FOUNTAIN OR MIXER SUPPLIER FOR INSTALLATION BY CONTRACTOR. PROVIDE STAINLESS STEEL UNISTRUT RACK FOR MOUNTING POWER CONTROL CENTERS. REFER TO DETAIL 3 ON SHEET 27 FOR EQUIPMENT RACK INFORMATION.
 - FOUNTAINS TO BE OUTFITTED WITH LED LIGHTING (RGBW) - ONLY FOR SITES 5,6,7 (BID ALTERNATE #1). PROVIDE POWER, CONTROL, CONDUIT AND CONDUCTOR FOR LIGHTING AS REQUIRED BY FOUNTAIN MANUFACTURER.
 - COORDINATE NEW ELECTRICAL SERVICE WITH CITY/UTILITY. SEE ONE-LINE DIAGRAM AND DETAIL 3/SHEET 27 FOR MORE INFORMATION.
 - EXISTING PUMP HOUSE.
 - WATERPROOF CORD SUPPLIED WITH FOUNTAIN OR MIXER.
 - UNDERGROUND CONDUIT AND WIRE. BETWEEN PULL POINTS (LOCATIONS TO BE COORDINATED WITH FIELD ENGINEER).
 - NEW PAD MOUNTED UTILITY TRANSFORMER PROVIDED BY UTILITY. COORDINATE TRANSFORMER CLEARANCE, FINAL LOCATION AND PAD REQUIREMENTS WITH UTILITY PRIOR TO INSTALLATION AND PROVIDE AS PER UTILITY REQUIREMENTS.
 - UTILITY PRIMARY CONDUIT ROUTING SHOWN FOR DIAGRAMMATIC PURPOSES ONLY. VERIFY FINAL ROUTING AND REQUIREMENTS WITH UTILITY PRIOR TO INSTALLATION.
- GENERAL NOTES:**
- HANDHOLES SHALL BE PROVIDED IN UNDERGROUND CIRCUITS SUCH THAT NO CONDUIT RUN IS LONGER THAN 300 FEET BETWEEN PULL POINTS (LOCATIONS TO BE COORDINATED WITH FIELD ENGINEER).
 - DASHED LINES INDICATE THE APPROXIMATE LOCATION OF THE UNDERGROUND CONDUIT AND WIRE. CONTRACTOR TO COORDINATE WITH THE ENGINEER FOR EXACT LOCATION IN THE FIELD.
 - ALL UNDERGROUND CONDUIT ROUTING SHOWN FOR DIAGRAMMATIC PURPOSES ONLY. VERIFY FINAL ROUTING WITH EXISTING SITE CONDITIONS.

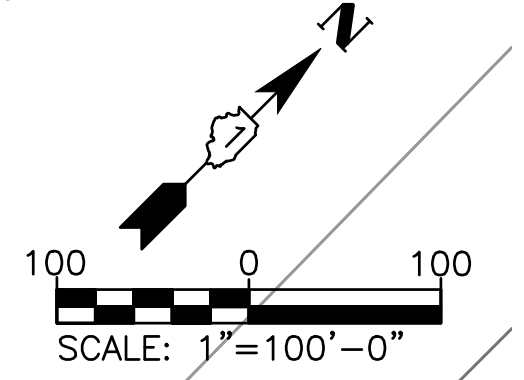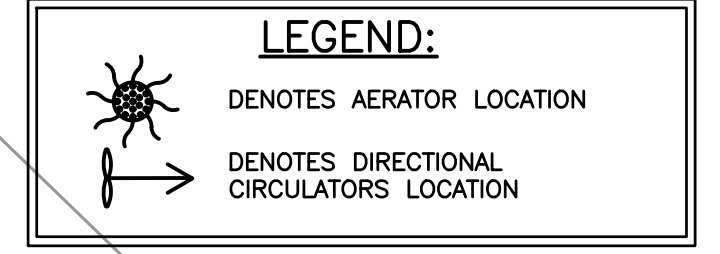

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen.com
 DATE PLOTTED: 2/6/2026 3:27 PM
 CLIENT: 191806-Electrical-Site-Plan
 FILE NAME: 191806-Electrical-Site-Plan
 PLOT DRIVER: None
 PEN TABLE: None


HRGreen.com
 Illinois Professional Design Firm
 #184.001322

USER NAME = YAAD,RAHMAN	DESIGNED - KSS	REVISED -
FILE NAME = 191806-Electrical-Site-Plan	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = 1"=100'	CHECKED - LRG	REVISED -
PLOT DATE = 05/24/2024	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

ELECTRICAL SITE PLAN			
SCALE: 1"=100'	SHEET NO. 02 OF 04 SHEETS	STA. _____	TO STA. _____

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	31
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

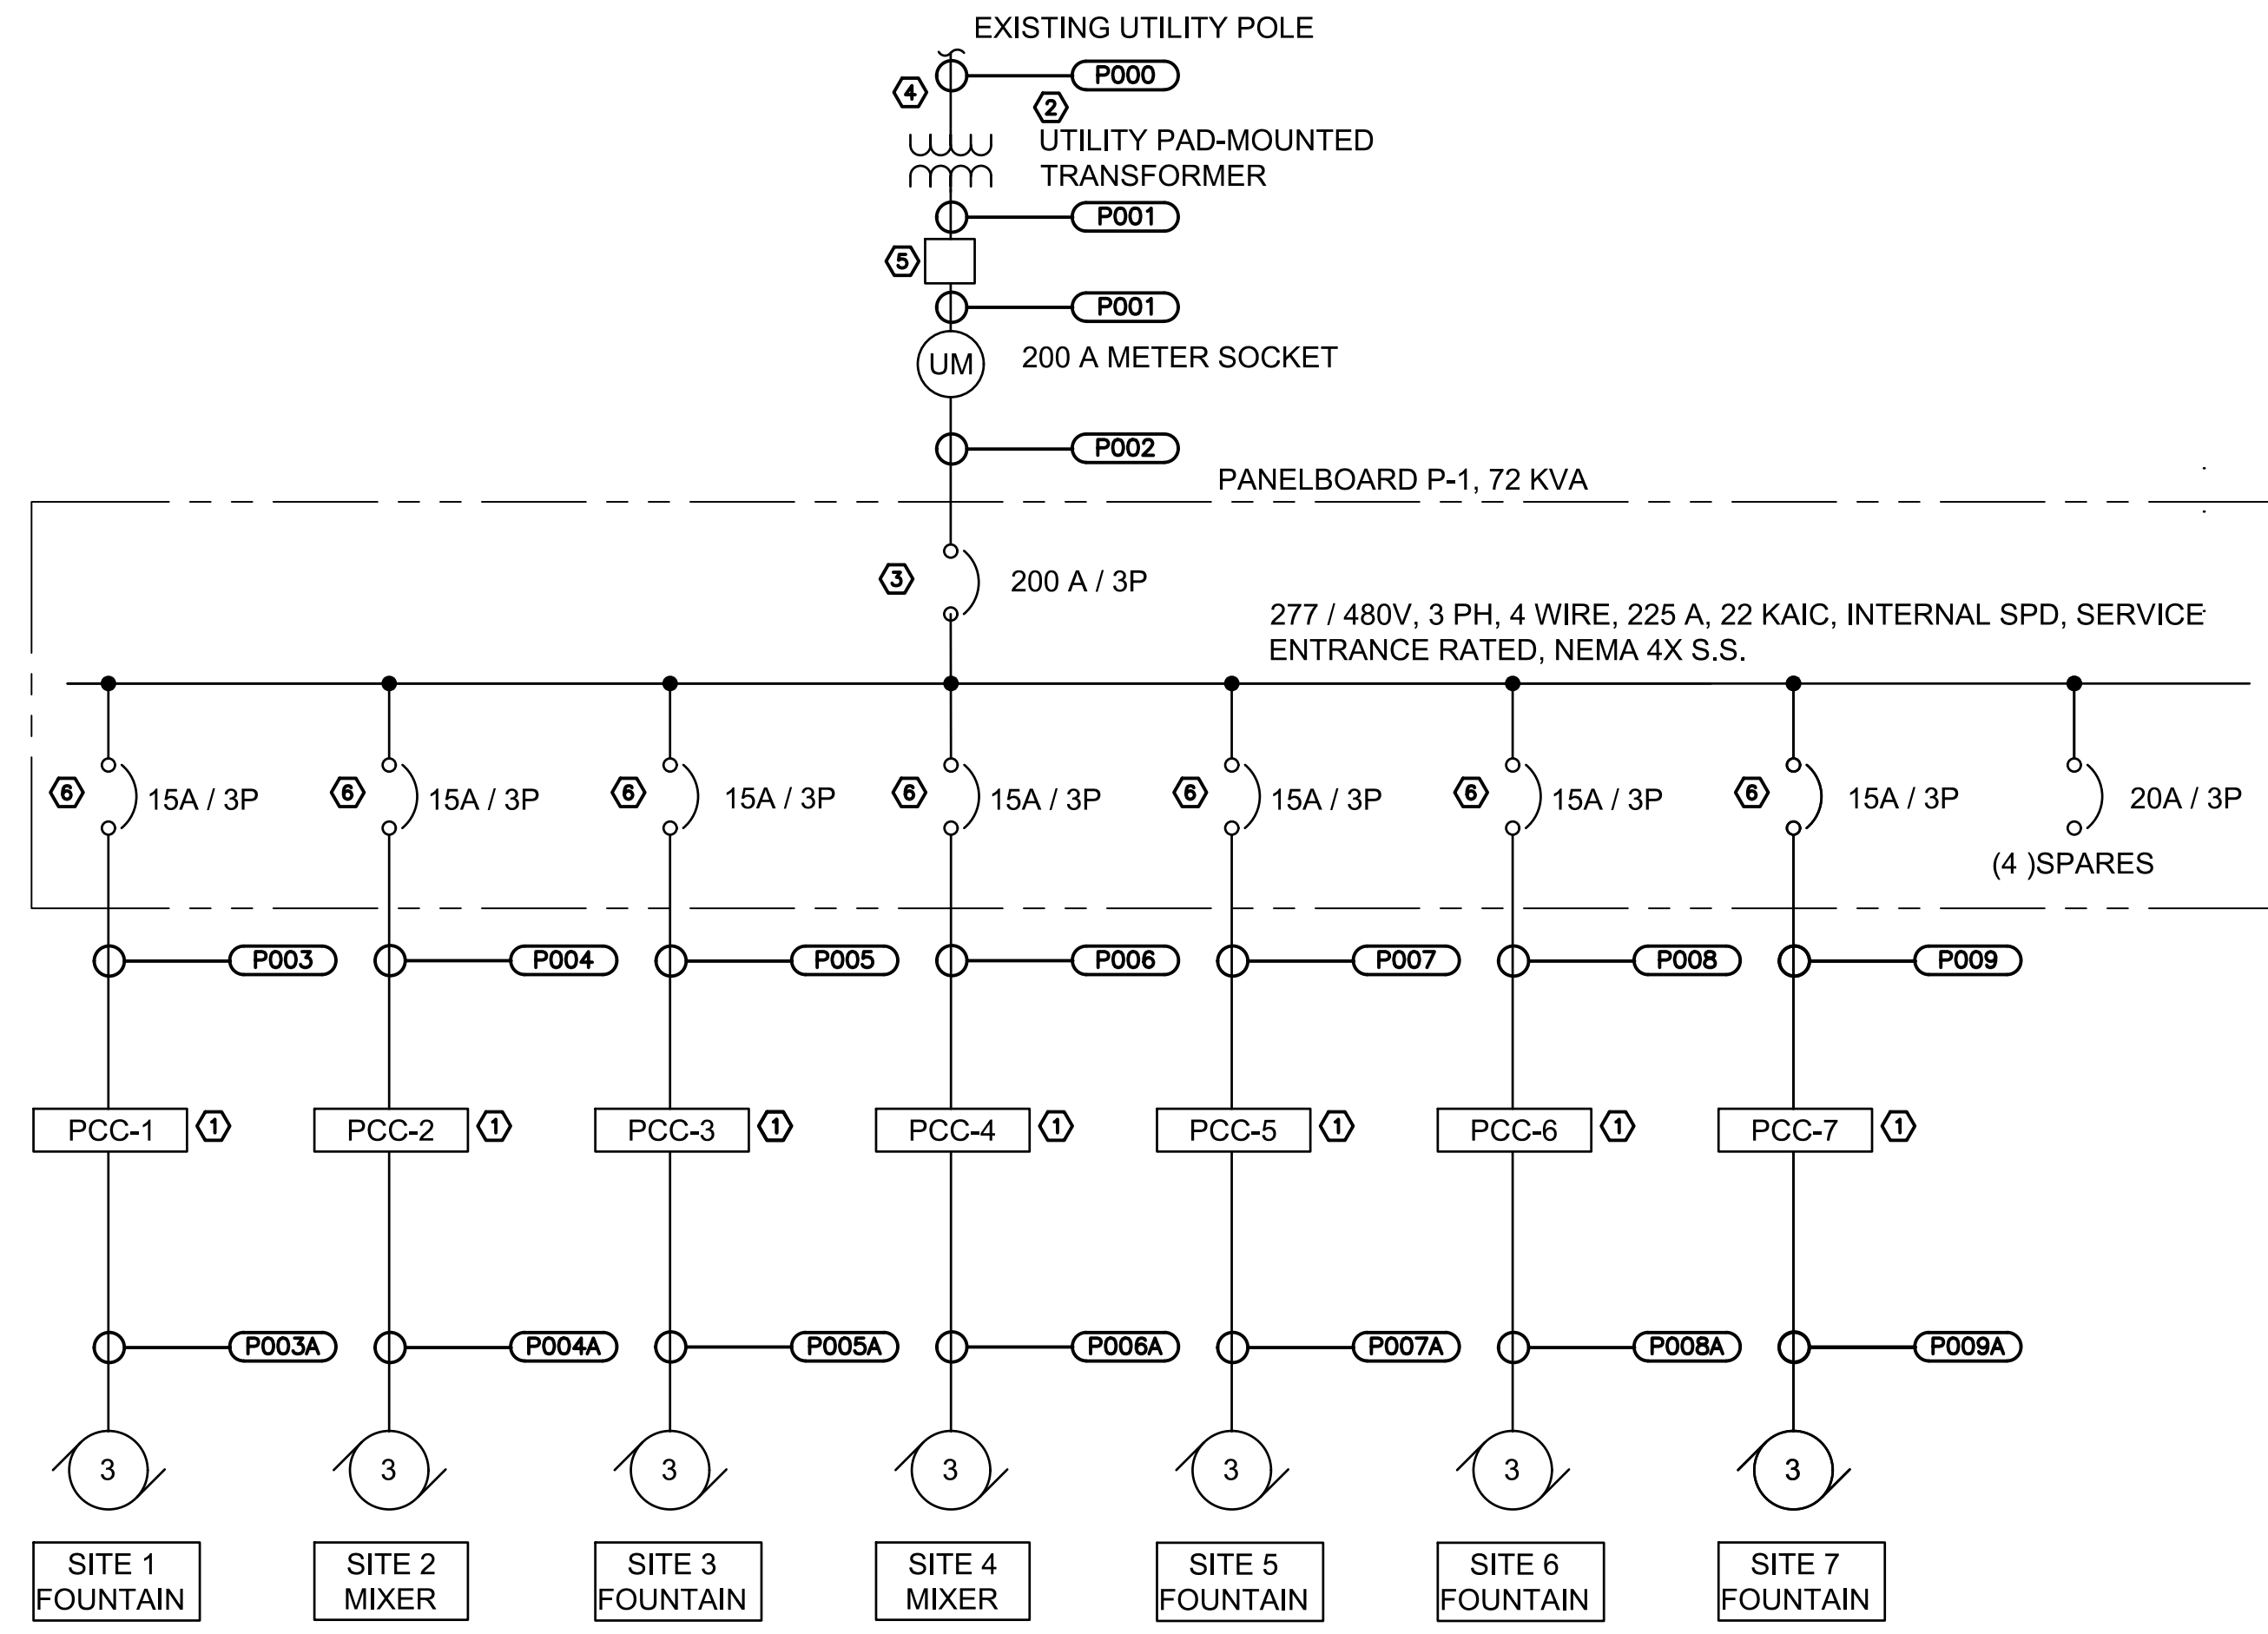

NEW ELECTRICAL SERVICE ONE-LINE DIAGRAM

- GENERAL NOTES:**
- CONDUCTORS ARE SIZED TO REDUCE VOLTAGE DROP WITHIN ACCEPTABLE LIMITS.
 - HANDHOLES SHALL BE PROVIDED IN UNDERGROUND CIRCUITS SUCH THAT NO CONDUIT RUN IS LONGER THAN 300 FEET BETWEEN PULL POINTS. (LOCATIONS TO BE COORDINATED WITH FIELD ENGINEER)
 - MANUFACTURER CUT SHEETS AND SPECIFICATIONS FOR THE FOUNTAINS, MIXERS, UNDERGROUND ELECTRICAL AND ASSOCIATED ITEMS SHOULD BE SUBMITTED TO THE ENGINEER FOR REVIEW PRIOR TO INSTALLATION

- KEY NOTES:**
- POWER CONTROL CENTER EQUIPPED WITH 5 MILLISECOND GROUND FAULT PROTECTION. FURNISHED BY FOUNTAIN OR MIXER SUPPLIER FOR INSTALLATION BY CONTRACTOR.
 - NEW 480Y/277 V, 3-PHASE, 60 HZ, 4-WIRE SERVICE PAD-MOUNTED TRANSFORMER BY ELECTRIC UTILITY COMPANY. COORDINATE FINAL LOCATION WITH UTILITY COMPANY.
 - PROVIDE SERVICE GROUNDING AS PER DETAIL 5/SHEET 27.
 - PROVIDE CONDUIT AND CONDUCTORS AS PER RACEWAY AND CABLE SCHEDULE. COORDINATE FINAL SIZE WITH UTILITY PRIOR TO INSTALLATION. COORDINATE FINAL LOCATION OF UTILITY POLE WITH UTILITY COMPANY.
 - PROVIDE TAP BOX AND ANY OTHER METERING EQUIPMENT/ACCESSORIES REQUIRED BY THE UTILITY.
 - VERIFY BREAKER SIZE WITH MANUFACTURER AND PROVIDE AS REQUIRED.

CABLE & RACEWAY SCHEDULE

CIRCUIT #	FROM	TAG #	TO	TAG #	CONDUCTORS	CONDUIT	REMARKS
P000	UTILITY POLE	-	UTILITY PAD MOUNT TRANSFORMER	-	BY UTILITY	(2) 4" HDPE	WIRING BY UTILITY. CONDUIT BY E.C. (NOTE 1) (NOTE 2)
P001	UTILITY PAD MOUNT TRANSFORMER	-	UTILITY METER SOCKET	-	4-#3/0	2"	VIA TAP BOX
P002	UTILITY METER SOCKET	-	PANELBOARD	P-1	4-#3/0	2"	
P003	PANELBOARD	P-1	SITE 1 FOUNTAIN POWER CONTROL CENTER	PCC-1	4-#8, #8 GND	1"	
P003A	SITE 1 FOUNTAIN POWER CONTROL CENTER	PCC-1	SITE 1 FOUNTAIN		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P004	PANELBOARD	P-1	SITE 2 MIXER POWER CONTROL CENTER	PCC-2	4-#6, #6 GND	1"	
P004A	SITE 2 MIXER POWER CONTROL CENTER	PCC-2	SITE 2 MIXER		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P005	PANELBOARD	P-1	SITE 3 FOUNTAIN POWER CONTROL CENTER	PCC-3	4-#6, #6 GND	1"	
P005A	SITE 3 FOUNTAIN POWER CONTROL CENTER	PCC-3	SITE 3 FOUNTAIN		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P006	PANELBOARD	P-1	SITE 4 MIXER POWER CONTROL CENTER	PCC-4	4-#6, #6 GND	1"	
P006A	SITE 4 MIXER POWER CONTROL CENTER	PCC-4	SITE 4 MIXER		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P007	PANELBOARD	P-1	SITE 5 FOUNTAIN POWER CONTROL CENTER	PCC-5	4-#6, #6 GND	1"	
P007A	SITE 5 FOUNTAIN POWER CONTROL CENTER	PCC-5	SITE 5 FOUNTAIN		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P008	PANELBOARD	P-1	SITE 6 FOUNTAIN POWER CONTROL CENTER	PCC-6	4-#10, #10 GND	1"	
P008A	SITE 6 FOUNTAIN POWER CONTROL CENTER	PCC-6	SITE 6 FOUNTAIN		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
P009	PANELBOARD	P-1	SITE 7 FOUNTAIN POWER CONTROL CENTER	PCC-7	4-#12, #12 GND	1"	
P009A	SITE 7 FOUNTAIN POWER CONTROL CENTER	PCC-7	SITE 7 FOUNTAIN		#12 POWER CORD	-	SUPPLIED BY MANUFACTURER
NOTES:							
1	COORDINATE QUANTITY, SIZE AND TYPE OF CONDUIT REQUIRED WITH UTILITY COMPANY PRIOR TO INSTALLATION.						
2	PROVIDE UPTURNED SWEEP AT BASE OF POLE AS PER UTILITY REQUIREMENTS.						

COMPANY NAME: HRGreen.com
 PROJECT CONTACT: HRGreen
 DATE PLOTTED: 2/6/2026 3:27 PM
 FILE NAME: Electrical-Details-OneLine
 PLOT DRIVER: DWG To PDF.pc3
 PEN TABLE: SEC-Standard.ctb




USER NAME = YAAD,RAHMAN	DESIGNED - KSS	REVISED -
FILE NAME = Electrical-Details-OneLine	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT


Electrical One Line Diagram and Schedule
 SCALE: N.T.S. SHEET NO. 03 OF 04 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	32
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				

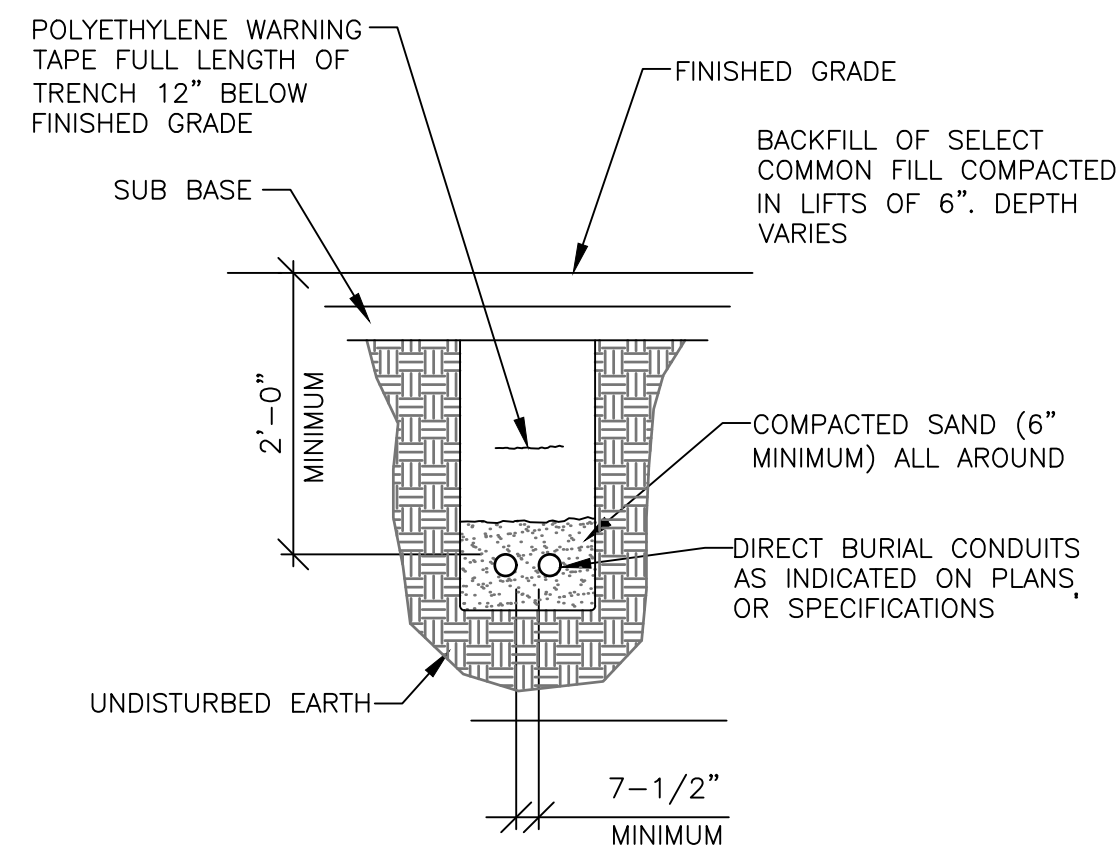

1 DIRECT-BURIED CONDUIT DETAIL

SCALE: NONE

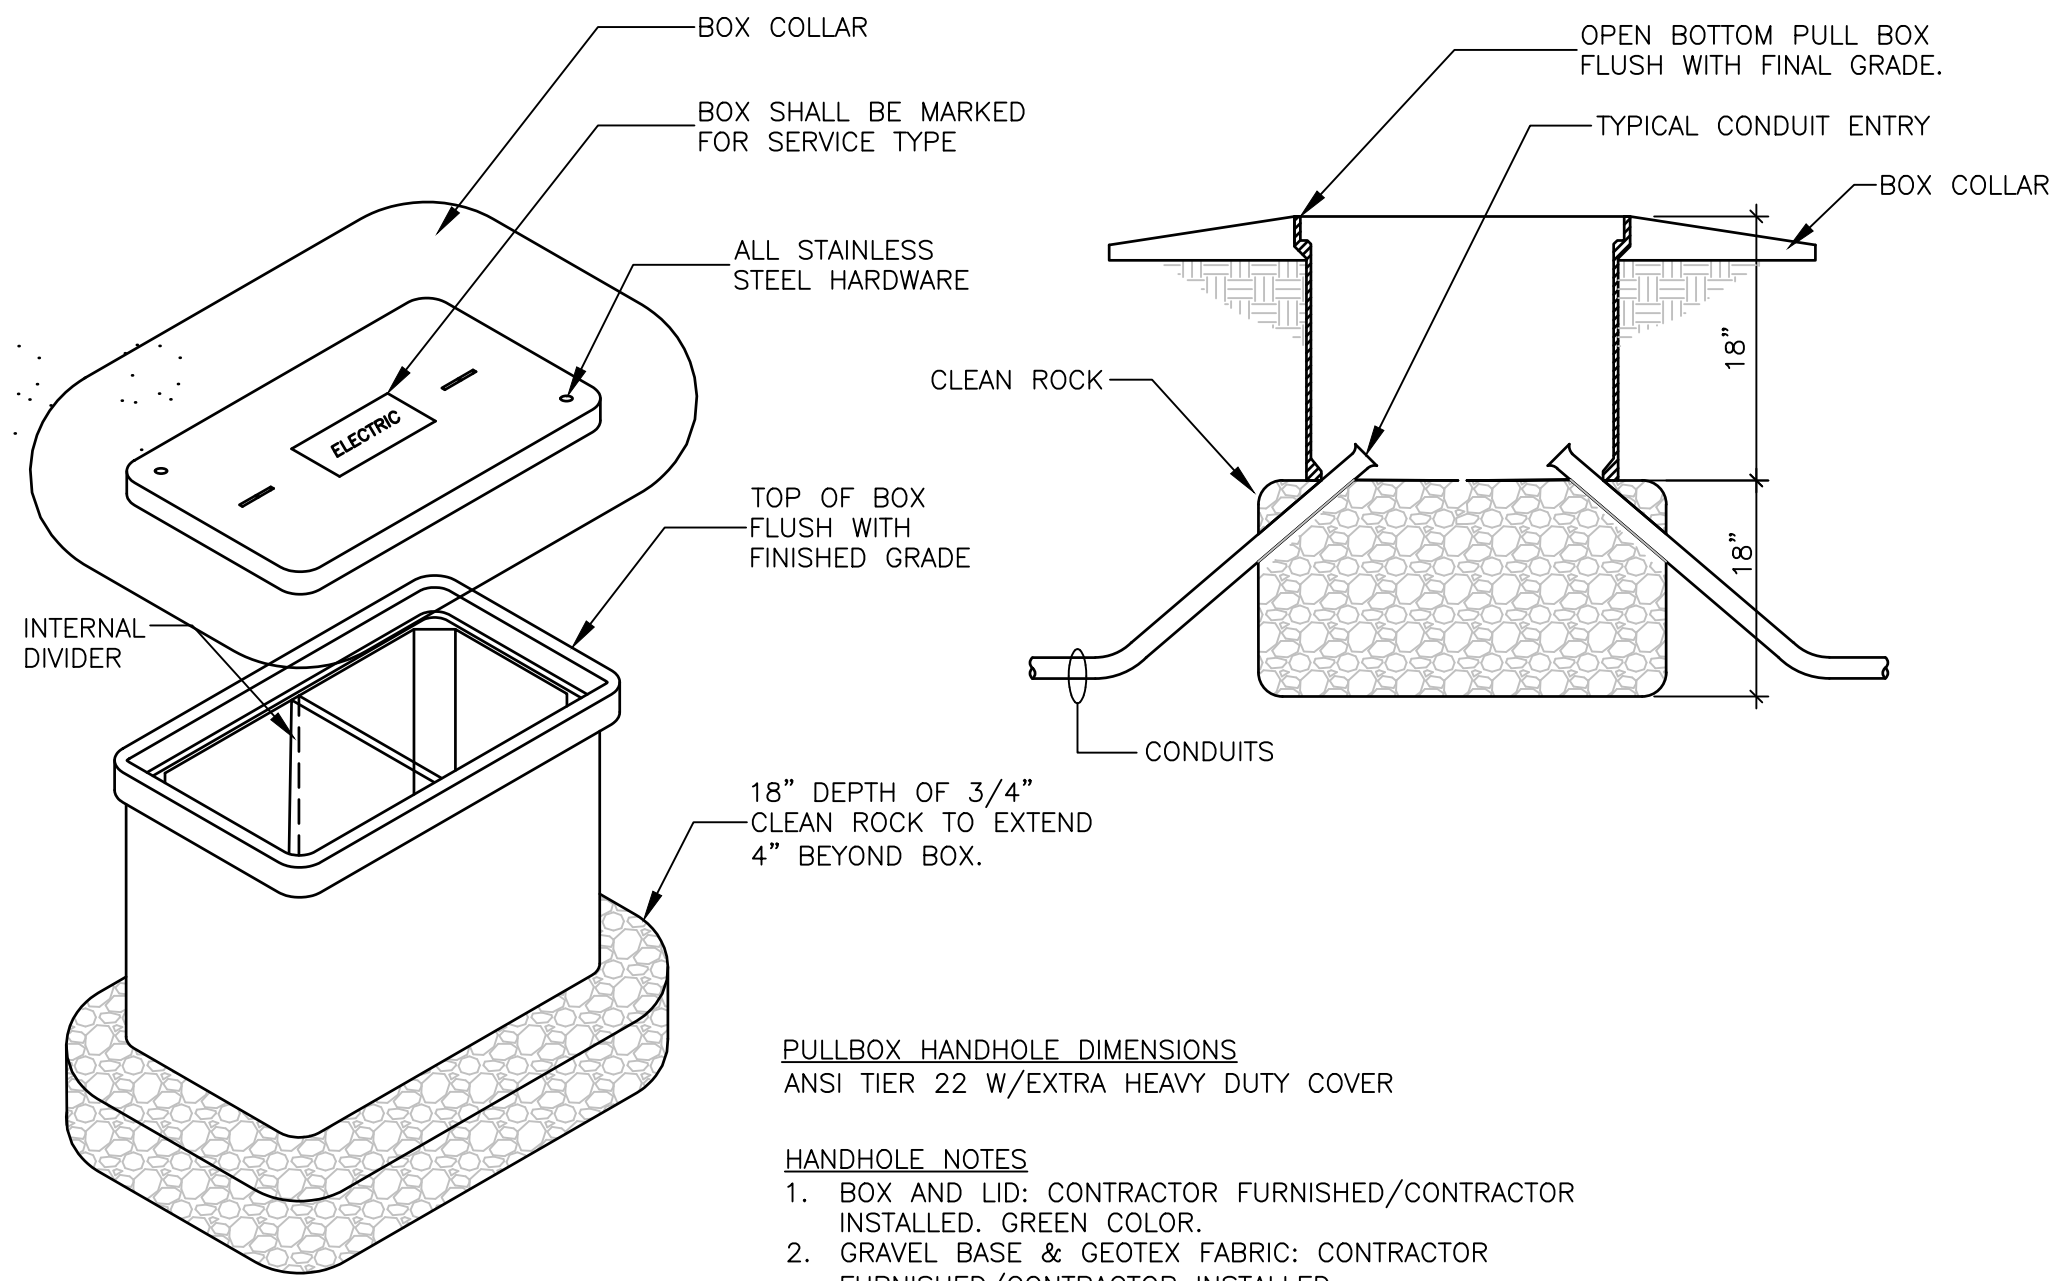


2 HANDHOLE DETAIL

SCALE: NONE


PULLBOX HANDHOLE DIMENSIONS
ANSI TIER 22 W/EXTRA HEAVY DUTY COVER

- HANDHOLE NOTES**
1. BOX AND LID: CONTRACTOR FURNISHED/CONTRACTOR INSTALLED. GREEN COLOR.
 2. GRAVEL BASE & GEOTEX FABRIC: CONTRACTOR FURNISHED/CONTRACTOR INSTALLED
 3. PROVIDE AND INSTALL PRE-CAST COLLAR FOR EACH HANDHOLE, REFER TO SECTION 26 0533.16.

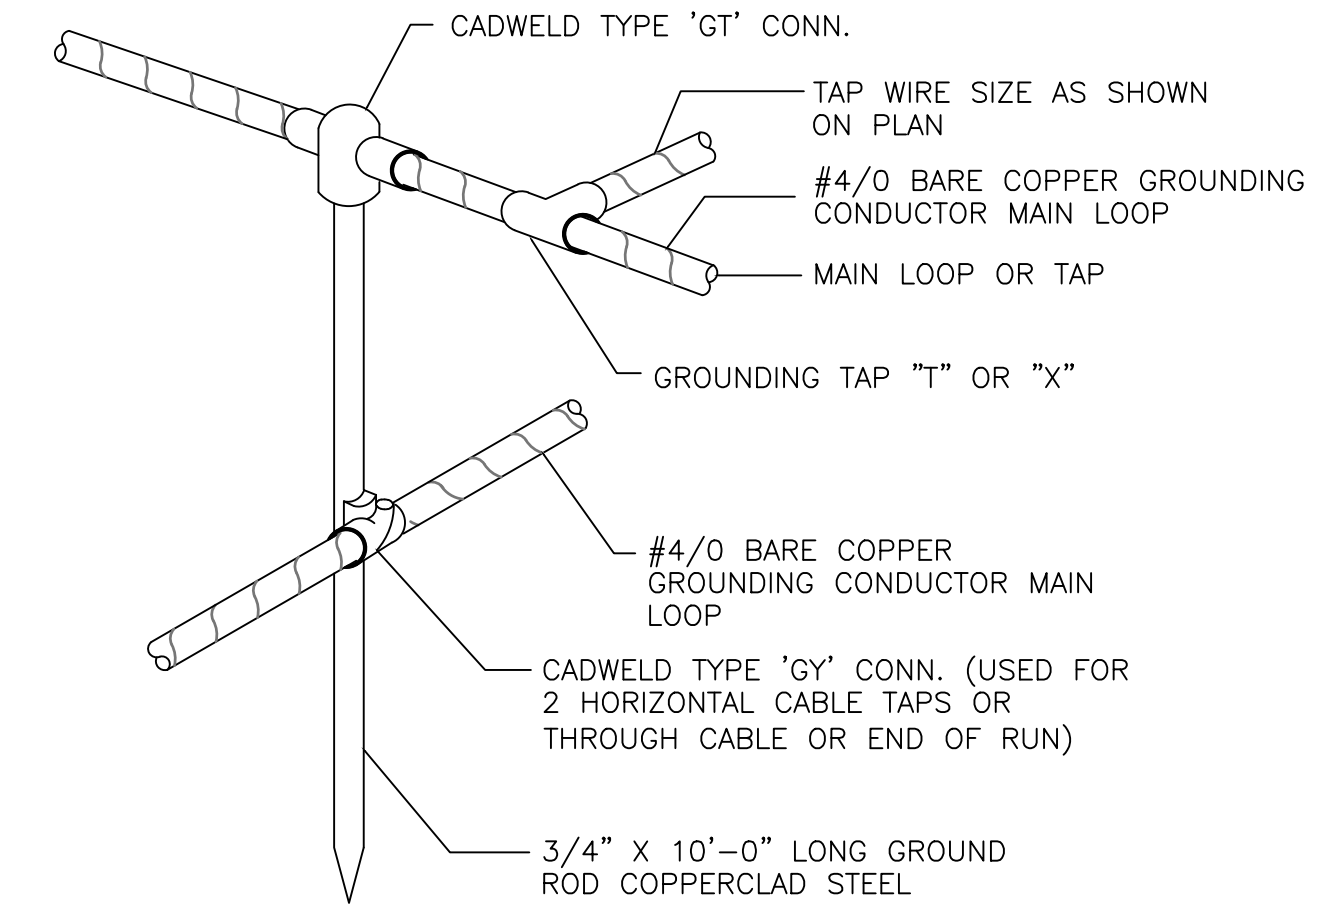

5 CONDUCTOR TO GROUND ROD CONNECTION DETAIL

SCALE: NONE

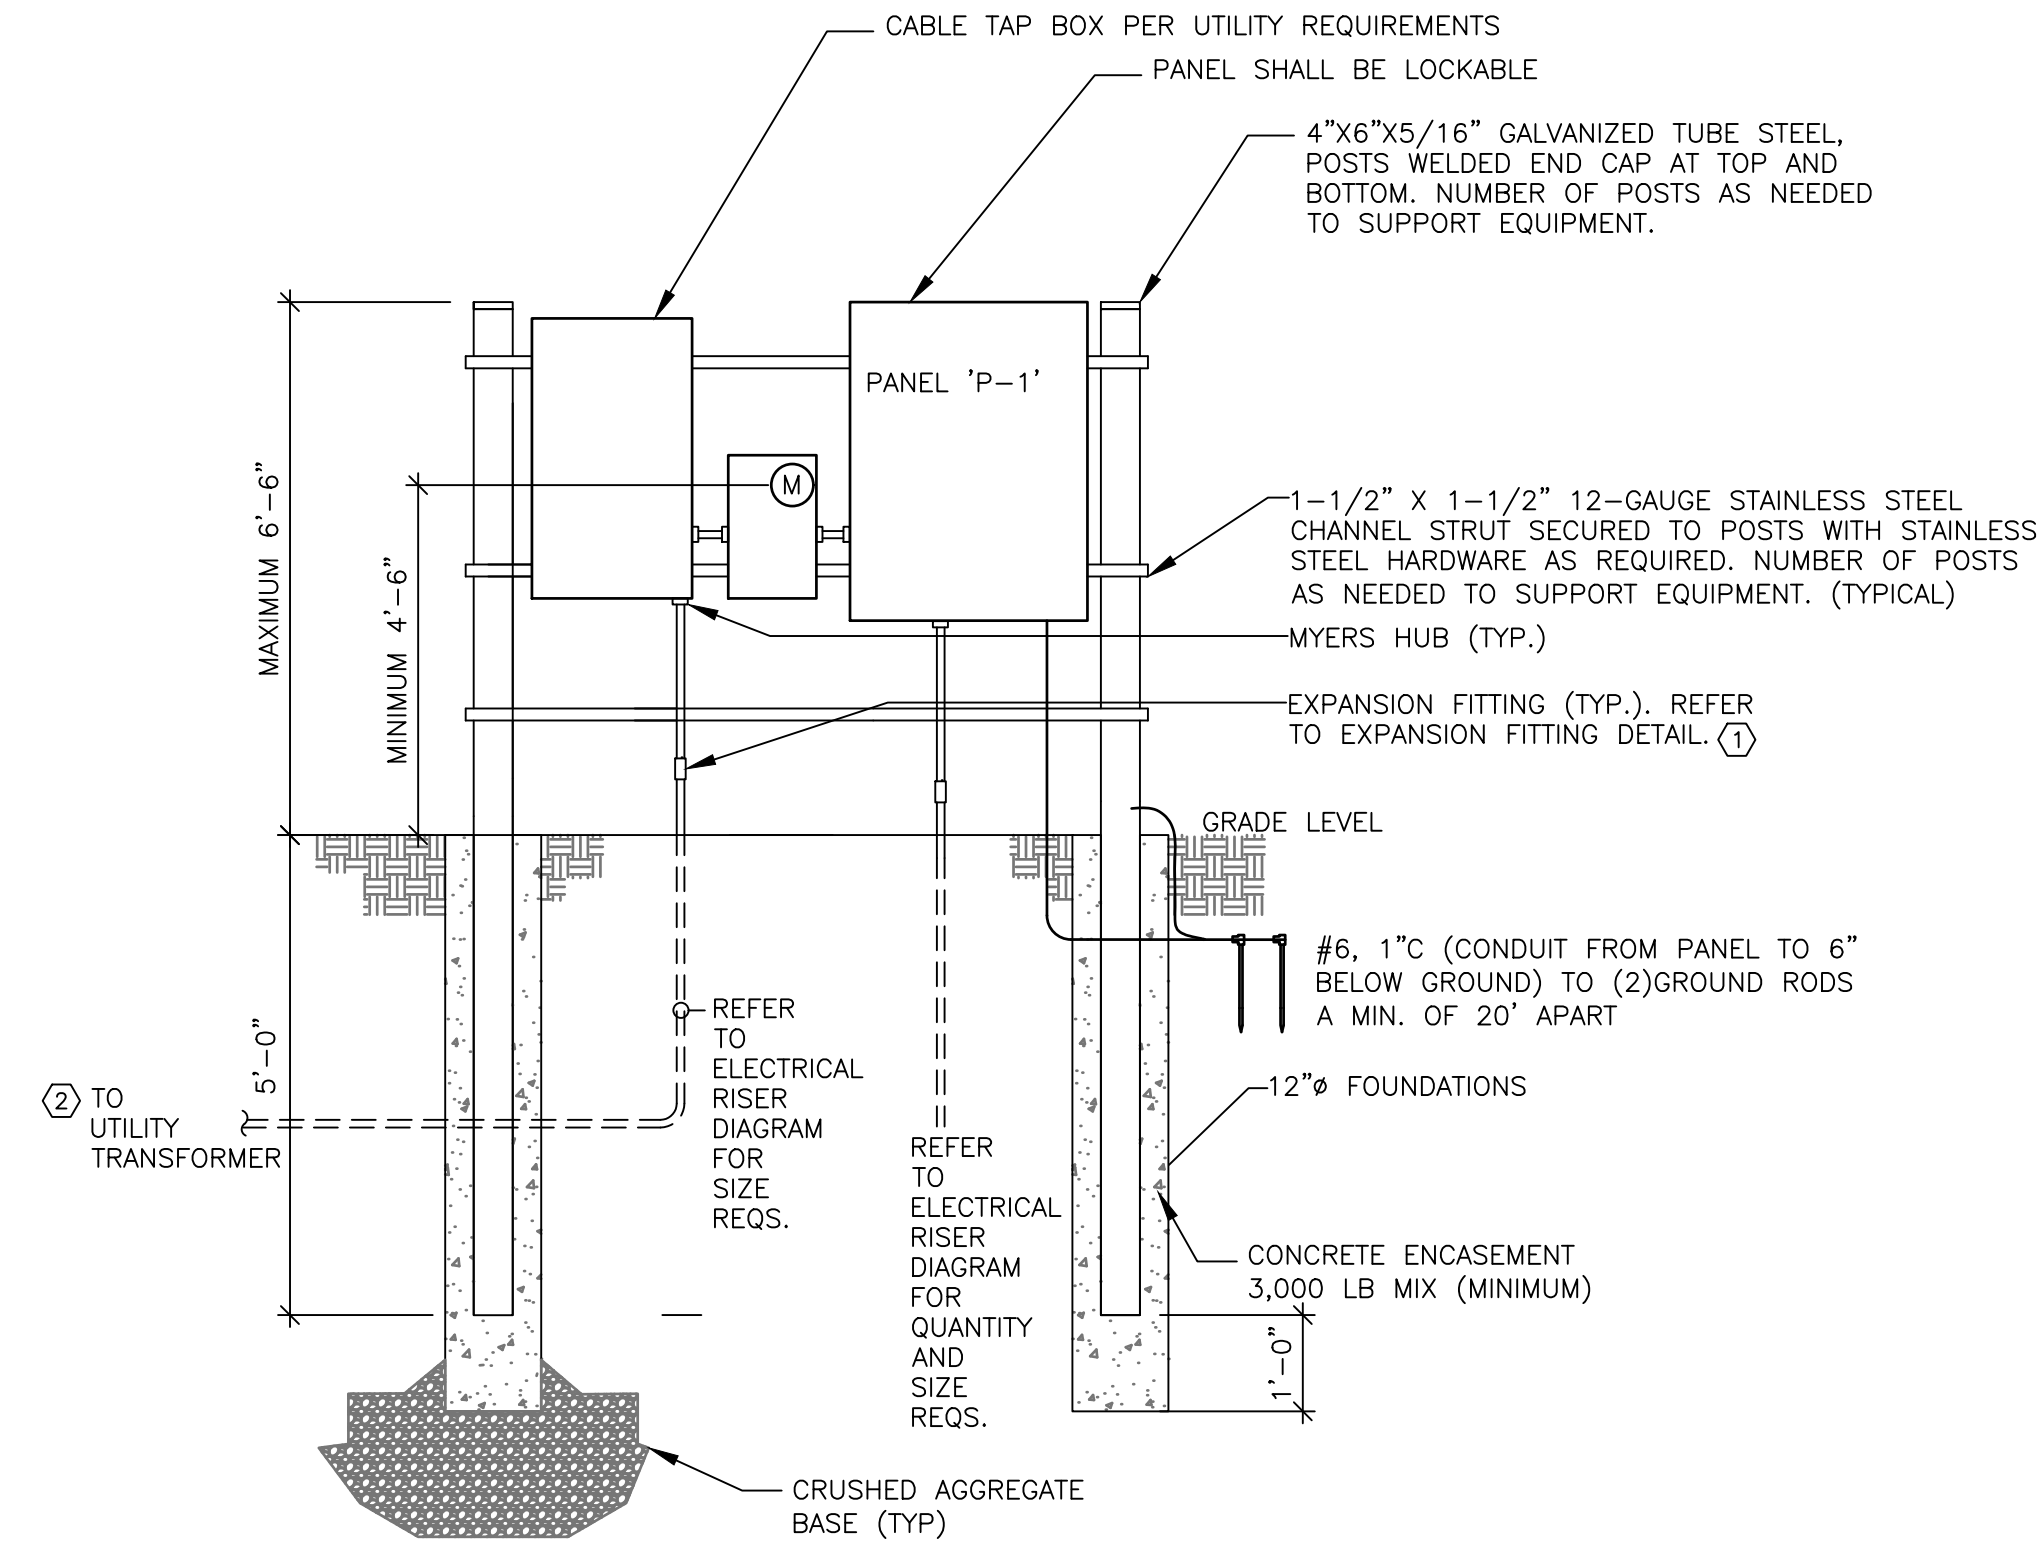


3 EQUIPMENT RACK

SCALE: NONE


EQUIPMENT RACK KEY NOTES:

- 1 **CONDUITS:** PROVIDE CONDUIT EXPANSION FITTING (4-INCH RATED) IN EACH UNDERGROUND CONDUIT. LOCATE BOTTOM OF EXPANSION FITTING AT LEAST 24-INCHES ABOVE GRADE. REFER TO CONDUIT EXPANSION DETAIL.
- 2 **UTILITY CONNECTION:** COORDINATE WITH UTILITY FOR LOCATION OF UTILITY TRANSFORMER AND REQUIREMENTS FOR ROUTING CONDUIT FROM UTILITY TRANSFORMER TO UTILITY METER. PROVIDE ALL NECESSARY ACCESSORIES REQUIRED BY THE UTILITY TO ROUTE CONDUIT FROM TRANSFORMER TO METER.

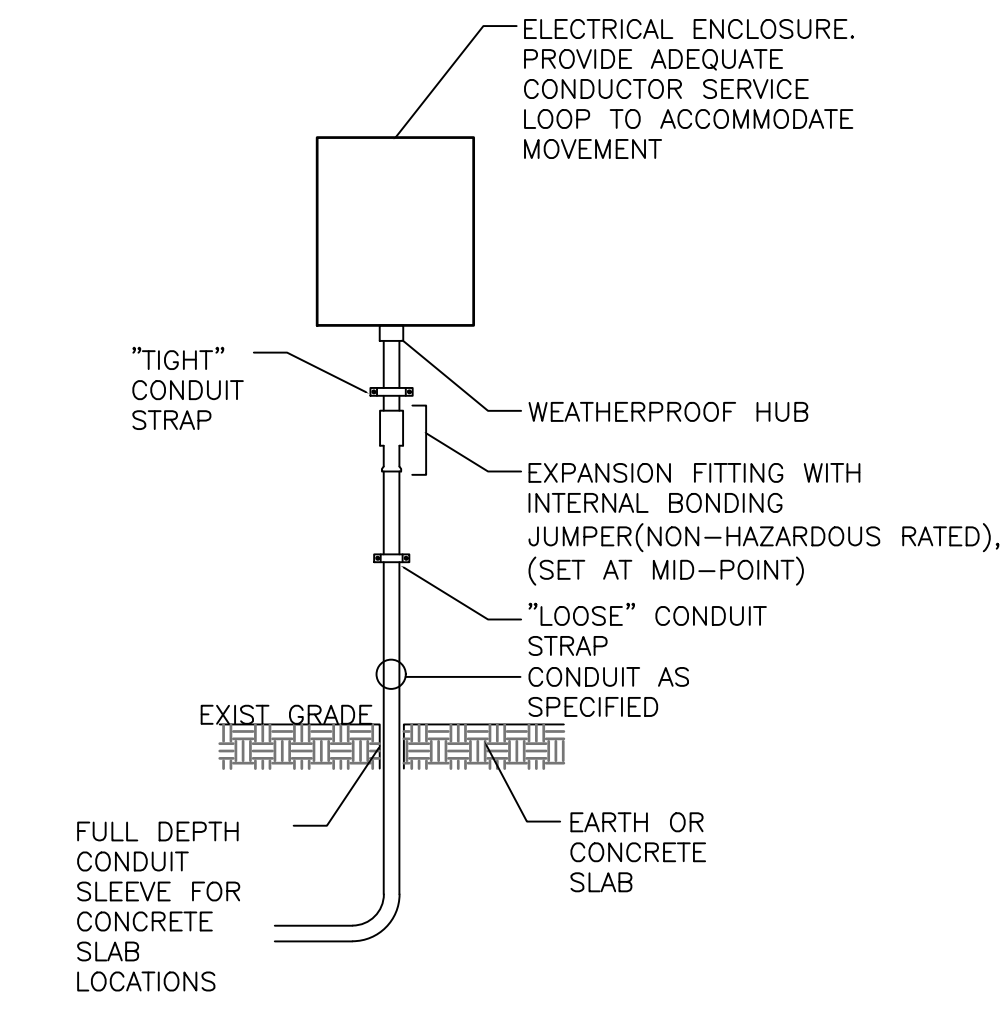

4 EXPANSION FITTING DETAIL

SCALE: NONE

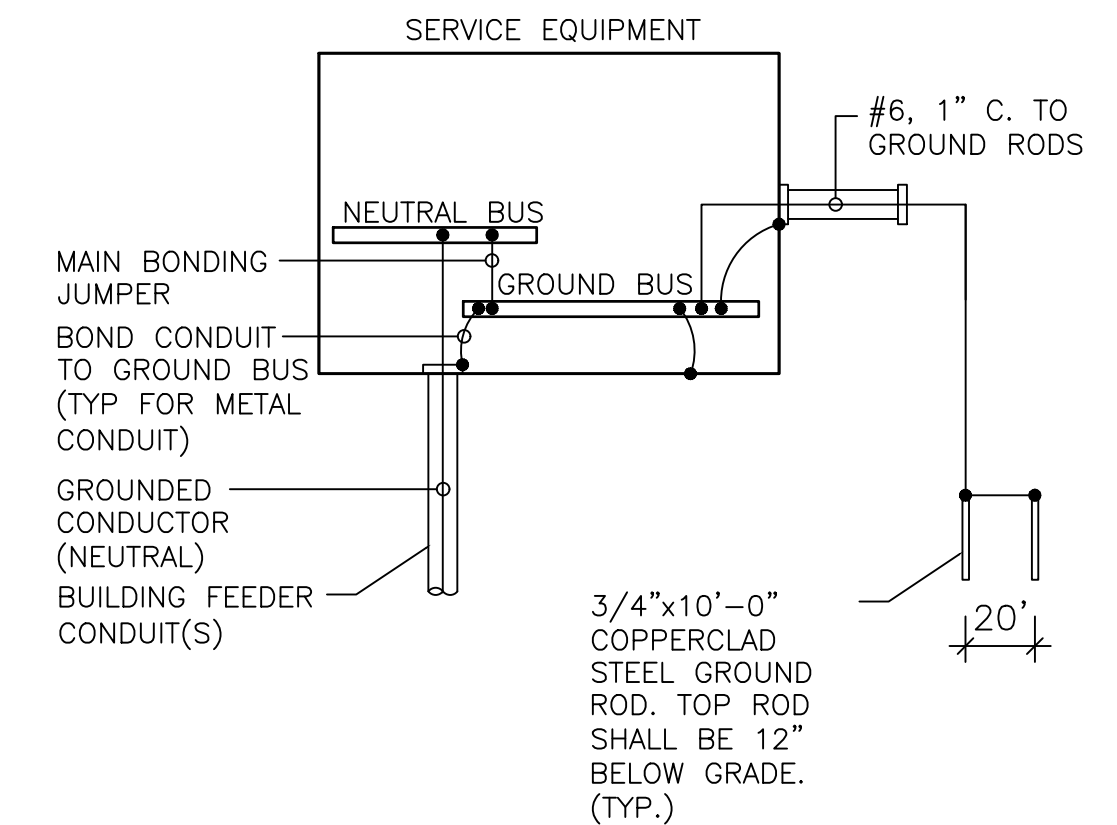

5 SERVICE GROUNDING DETAIL

SCALE: NONE

COMPANY NAME: HRGreen.com
PROJECT CONTACT: HRGreen.com
DATE PLOTTED: 2/6/2026 3:27 PM
FILE NAME: 191806-Electrical-Details
PLOT DRIVER: DWG To PDF.pc3
PEN TABLE: SEC-Standard.ctb



USER NAME = YAAD,RAHMAN	DESIGNED - KSS	REVISED -
FILE NAME = 191806-Electrical-Details	DRAWN - MPL/RMY	REVISED -
PLOT SCALE = N.T.S.	CHECKED - LRG	REVISED -
PLOT DATE = 2/6/2026	DATE -	REVISED -

CITY OF AURORA
MASTODON LAKE DREDGING PROJECT

ELECTRICAL DETAILS

SCALE: N.T.S. SHEET NO. 04 OF 04 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		KANE	33	33
CONTRACT NO.				
ILLINOIS FED. AID PROJECT				